SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1904, by Munn & Co.]

Vol. XCI.—No. 9. ESTABLISHED 1845.] NEW YORK, AUGUST 27, 1904. [5 CENTS A COPY $3.00 A YEAR.

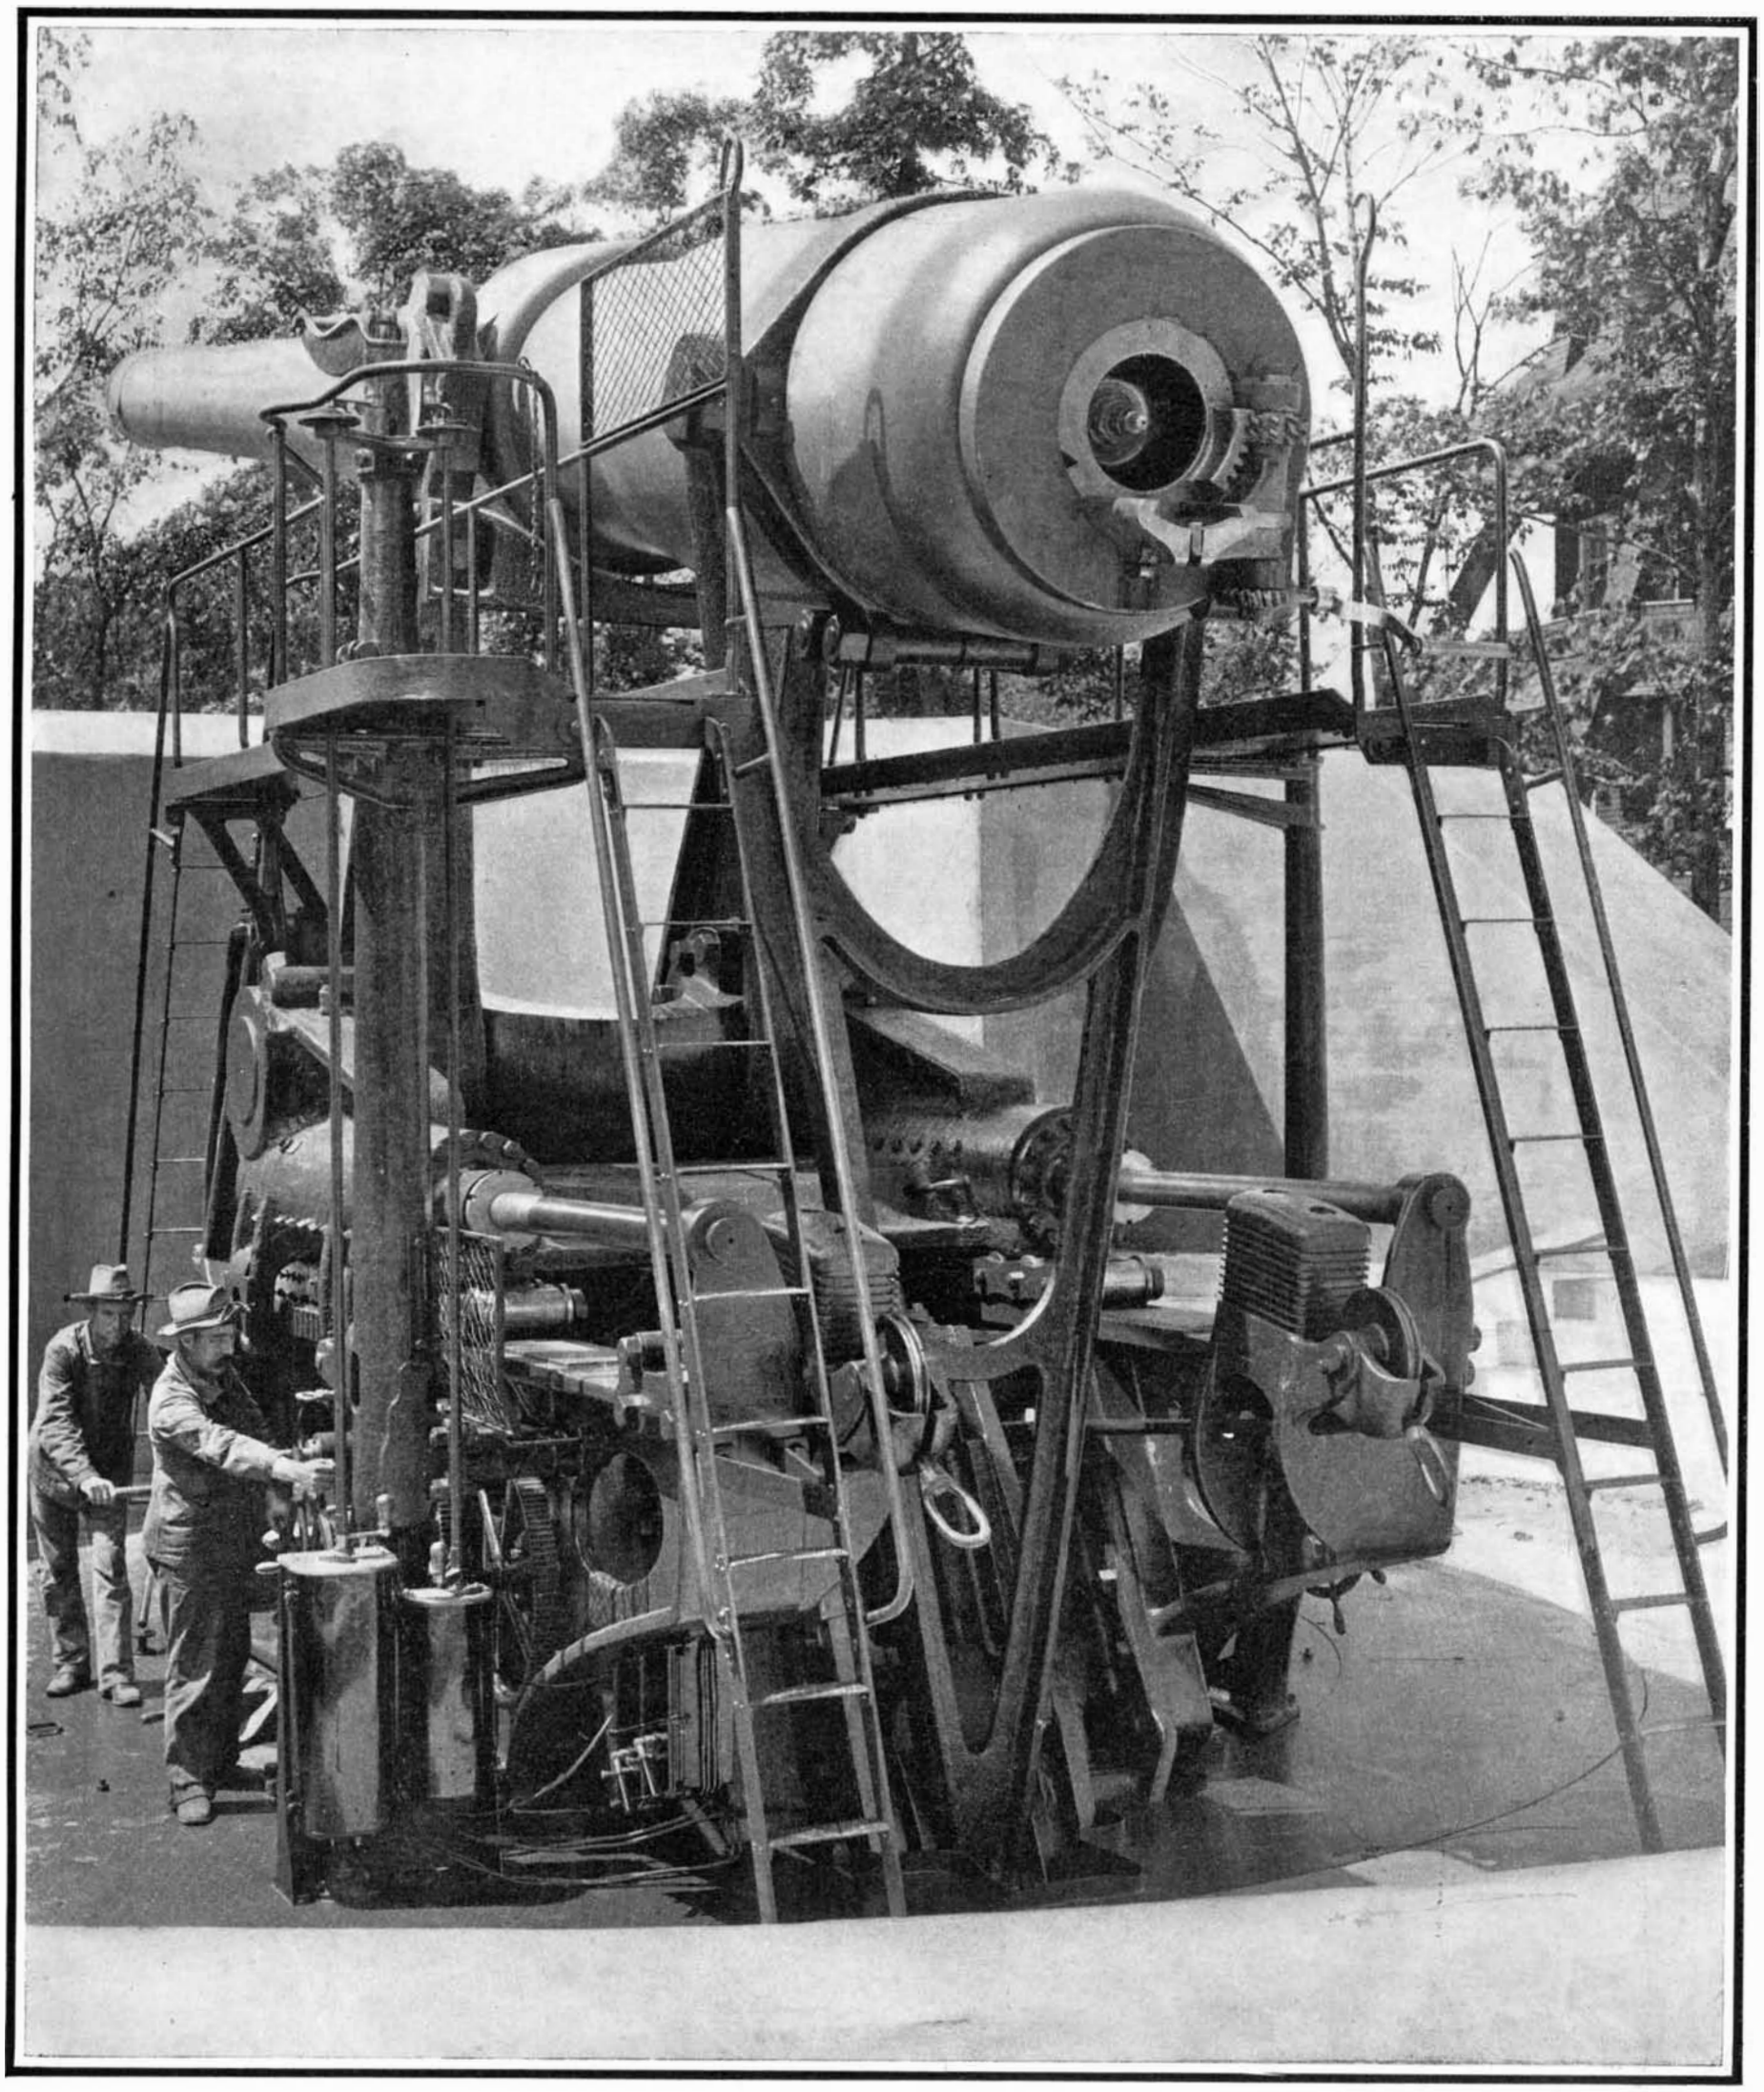

Copyright 1904 by Munn & Co.

From a photograph taken specially for the SCIENTIFIC AMERICAN.

Twelve-inch 42-calibre Gun on Disappearing Mount. Weight of Gun, 131,500 pounds; **Weight of Shell,** 1,000 pounds; **Muzzle Velocity,** 23,000 feet per second. **Maximum Range,** 18 miles. Gun is traversed and elevated by two 4-horsepower electric motors, whose controllers are seen in lower left-hand corner.

THE WAR DEPARTMENT'S EXHIBIT AT ST. LOUIS FAIR.—[See page 144.]

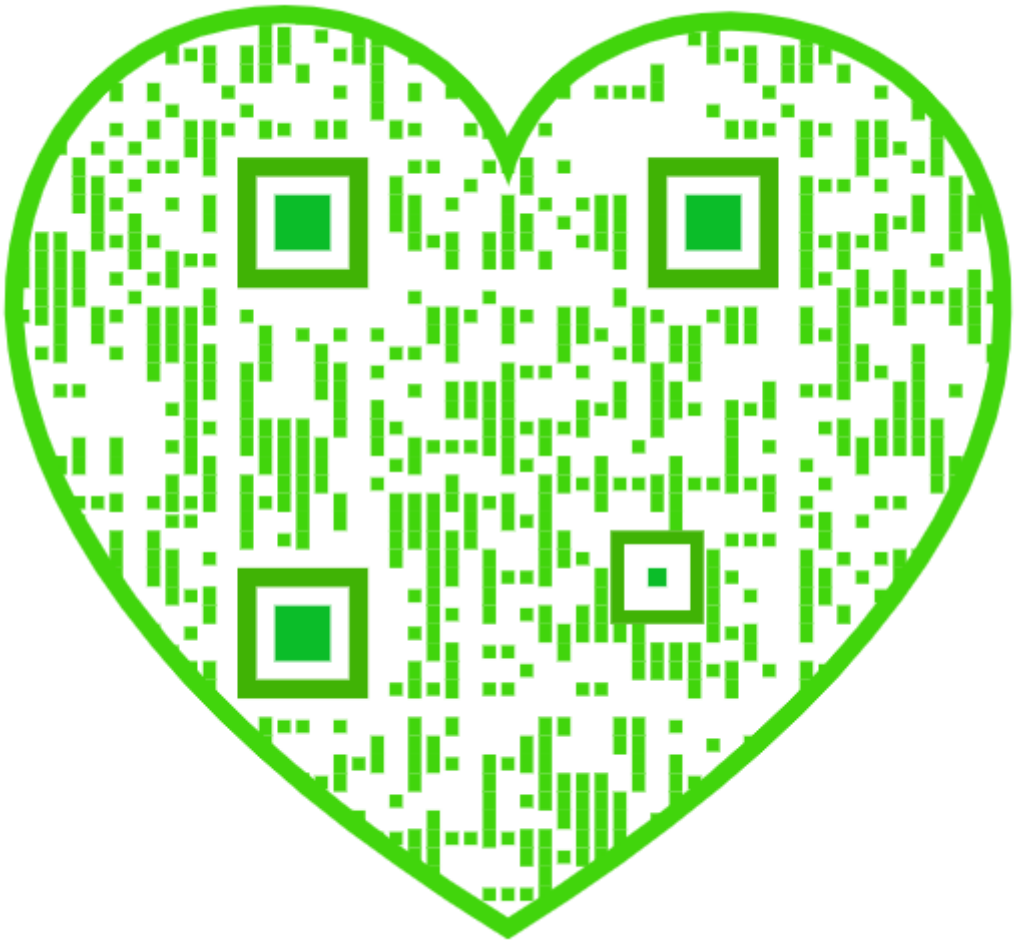

SCIENTIFIC AMERICAN
ESTABLISHED 1845

MUNN & CO., - - Editors and Proprietors

Published Weekly at
No. 361 Broadway, New York

TERMS TO SUBSCRIBERS
One copy, one year for the United States, Canada, or Mexico $3.00
One copy, one year, to any foreign country, postage prepaid. £0 16s. 5d. 4.00

THE SCIENTIFIC AMERICAN PUBLICATIONS.
Scientific American (Established 1845) ..... $3.00 a year
Scientific American Supplement (Established 1876) ..... 5.00 "
Scientific American Building Monthly (Established 1885) ..... 2.50 "
Scientific American Export Edition (Established 1878) ..... 3.00 "
The combined subscription rates and rates to foreign countries will be furnished upon application.
Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, New York.

NEW YORK, SATURDAY, AUGUST 27, 1904.

The Editor is always glad to receive for examination illustrated articles on subjects of timely interest. If the photographs are *sharp*, the articles *short*, and the facts *authentic*, the contributions will receive special attention. Accepted articles will be paid for at regular space rates.

THE SCIENTIFIC AMERICAN AND THE ST. LOUIS FAIR.

In spite of some rather serious but inevitable defects the St. Louis Exposition is unquestionably the most comprehensive and instructive of any that have been held in this country. Its chief drawback, as we have already stated in these columns, is its huge area size; but this was scarcely avoidable when once the sponsors of the fair had planned it on the vast scale upon which it has been built. The late President McKinley once spoke of expositions as being the time-keepers of progress, and in the intervening eleven years since the last great international fair was held in this country, such has been the feverish activity of industrial life, not merely in America but in every part of the civilized world, so vast have been the strides that have been taken in many of the industrial arts and sciences, that it seems to require an exposition of the magnitude of the present one at St. Louis adequately to record, in concrete form, the world's advancement during these eleven years.

If it be a difficult task merely to walk through the exhibits and see them with one's own eyes, it becomes a still more formidable task to serve as the eyes of the great multitude of readers of the SCIENTIFIC AMERICAN, and adequately set before them by pen and by picture a comprehensive review of the Exposition. Of the two alternative methods of doing this which presented themselves, that of publishing a special World's Fair number devoted exclusively to the Exposition was rejected, for the reason that it was altogether impossible to do justice to the fair in any single compact edition that would not be too cumbersome to serve its purpose. Consequently we have decided to distribute our World's Fair articles through the successive issues of the SCIENTIFIC AMERICAN and the SUPPLEMENT—a policy which will enable us to place the subject more exhaustively before our readers than would be possible in a single issue. Our editor has just returned from a two months' residence on the grounds, and the material that he gathered will be used in the form of illustrated and descriptive articles that will appear in our various publications during the next few months.

RAILWAY SPEEDS HERE AND IN EUROPE.

There are some controversies that will not down, and one of the most persistent of these is that relating to the relative speed of railroad travel here and in Europe. We have been in receipt lately of several letters asking us for an expression of opinion on the subject, and we therefore think it well to state, for the benefit of those who are interested in the question, that in respect of the number and speed of fast express trains, our railway service in this country simply cannot compare with that of France and England. We say this with the full knowledge that there are a few fast expresses that maintain a high average speed for long distances in this country—trains which, if the element of total distance be taken into account, as in the case of the Twentieth Century Limited, on the New York Central and Lake Shore lines, have no competitor in Europe. There is also a service of very fast trains running between Philadelphia and Atlantic City, during the summer months, which are scheduled to run at a higher speed than the fastest of what might be called short-distance expresses in other countries. But when it comes to a broad comparison of fast express service in France and England with that of the United States, we may as well confess to the uncomfortable fact that our service, taken as a whole and judged merely with regard to its speed, can scarcely be entitled to be called first-class. After we have eliminated the Empire State Express, with its average speed of about 54.5 miles an hour between New York and Buffalo; the Twentieth Century Limited, with its average speed of about 50 miles an hour from New York to Chicago, and the service of a few fast trains from Philadelphia to Atlantic City, maintained during the summer months, we have mentioned all of the trains that can be presented in comparison with the remarkable service that is being run on regular schedule this year on the other side of the Atlantic.

It was only a few years ago that the French railroads took the lead from England by putting into service several trains that ran at average speeds of from 55 to 60 miles an hour. At the present time there are in France thirty-five trains that are booked to run at speeds from start to stop of 55 miles an hour and upward. The fastest of these runs from Paris to Longeau, 79 miles, at 60.8 miles an hour; another is timed to do the distance from Paris to Busigny, 112½ miles, at 60.3 miles an hour; the next fastest run is the 109 miles from Paris to Abbeville, at 60.2 miles an hour, and the fourth fastest train runs from Paris to St. Quentin, 95¼ miles, at 60.1 miles per hour. Then follow seven trains, with a timed speed of from 58 to 58.6 miles per hour; eleven trains at from 57.1 to 57.8 miles per hour; and ten that run at an average speed of from 55.0 to 56.5 miles an hour. These runs are made without a stop over distances that will average about 85 miles.

During the past two years the English railroads have been building more powerful engines, and the result is seen in a greatly-accelerated train schedule. They have regained the lead in fast express service by putting in regular service a total of fifty-three daily trains scheduled to make a speed of 55 miles an hour and over from start to stop. The fastest run of these is over the 44¼ miles from Darlington to York at 61.7 miles an hour; but the most meritorious are the runs from London to Bath, 106⅛ miles, at 59.4 miles; from London to Bristol, 118½ miles, at 59.2 miles; two trains between London and Exeter, 193¾ miles, at 56.7 miles, and three at 55.3 miles an hour. These last-named trains are run on the Great Western Railway, on which a train carrying the American mails was recently run from Plymouth dock to London, a distance of 246¾ miles, at an average speed of 65.49 miles for the whole journey, the last 36 miles being covered at the rate of 79.17 miles an hour. The fifty-three daily expresses that run in the British Isles include twenty-four trains with a schedule speed of 55.1 to 55.8 miles an hour; thirteen trains with a speed of from 56.2 to 56.9 miles an hour; seven trains of from 57.0 to 57.8 miles an hour speed; five trains of from 58.1 to 58.9 miles an hour speed; three of from 59.1 to 59.4 miles, and one of 61.7 miles per hour schedule speed. The average distance of these runs, start to stop, is 101 miles.

It must be understood that this comparison is made merely on the basis of the actual number of high-speed trains available to the traveling public. No account is taken of train weights. Compared with American train weights these European trains are light; but so are the engines. Moreover, though the trains are lighter, their carrying capacity, owing to the lighter construction, is equal to that of our larger and heavier trains, so that the passenger is still the gainer. It would not pay to run so many trains at such high speeds in the United States, for the reason that our latest Pullmans weigh over 60 tons, or over 2 tons to the passenger, which, from an engineering point of view, is an absurd proportion. The only argument in their favor is that such heavy cars are safer in a collision; but would it not be a saner policy to build our cars lighter, abolish collisions, and operate our railroads with the same care that enabled the English roads, in spite of their many fast trains, to operate their railroads, as they did the year before last, without killing a single passenger?

Surely this is a problem worth consideration.

A GREAT RAILWAY SCHEME.

The government of Canada has entered into partnership with a newly-incorporated company for the construction of a transcontinental railway from the Atlantic to the Pacific, to be wholly within Canadian territory. This road will be about 3,600 miles in length; and the total cost is estimated at $150,000,000. This does not include the branch lines, aggregating about 2,000 miles.

The western division, extending from Winnipeg to the Pacific, is to be constructed by the Grand Trunk Pacific Railway Company, a chartered corporation, not yet organized, to be controlled by the Grand Trunk Company, which will be the majority stockholder. The line from Winnipeg to the Atlantic terminal, at or near Moncton in the province of New Brunswick, will be built by the government, and leased to the Grand Trunk Pacific Company at a 3 per cent rental for fifty years.

From Winnipeg to Edmonton, about 800 miles, the line will run through a prairie country, paralleling or intersecting branches of the Canadian Pacific and Canadian Northern railways. Northwest from Edmonton, for 300 miles to the foothills of the Rocky Mountains, there are no engineering difficulties until the route enters the valley of the Upper Peace River. Following this valley through the Rockies, the surveyed line reaches a point where a southerly turn brings it to the canyon of the Skeena. By a tortuous and difficult route through the Coast Range, the line finds its western terminal at or near Port Simpson, within a dozen miles of the recently defined southernmost point of the Alaskan boundary. An official statement presented to the Senate gives the length by the surveyed route, through the mountains, as 766 miles. This makes 1,886 miles for the total length of the division, Winnipeg to the Pacific, to be built by the company.

The surveys of the eastern division have not yet made sufficient progress to permit a definite location of the route. The most favorable line will probably be found north of the height of land, crossing a succession of valleys which have their outlet in Hudson's Bay. The St. Lawrence River will be traversed by the great bridge now under construction a few miles west of Quebec city. Between Quebec and Moncton, the line will come very near to the boundary of the State of Maine, until the valley of the St. John River is reached, thence a choice of routes is presented to the seaboard.

The government provides the cost of the eastern division. For the western division, bonds issuable by the Grand Trunk Pacific Company are to bear government guaranty of 3 per cent in respect of three-fourths of the total amount; the interest on the remaining fourth part is to be guaranteed by the Grand Trunk Company. The government guaranty, however, becomes operative only on the completion of the railway from Winnipeg to the Coast. Interest upon outlay in construction is to be capitalized. The western division must be completed by December 1, 1911.

THE ROMANCE OF LIGHT.

There are few objects in daily use about which we stop to ask how they came to us, and through what stages of development they passed before arriving at that perfection which we now enjoy. Should we turn a retrospective eye toward "those good old times," we should be amazed at the slow steps of progress, and the almost infinite struggles through which inventions came into acceptance.

The connection between a burning fagot and an electrolier may seem remote, but every link in the chain is perfect. From the smoky rays of the first flaring brand of the cave-dweller, to the electric light, filling the most spacious halls with its glory and making the streets of our cities luminous as the day, the way has been paved with human effort and illumined by human genius.

The pine torch was no doubt coeval with fire in the hands of men. The resinous knot was the first step in artificial illumination. Its use is found in every savage tribe and nation, while it is a necessity in the lives of all first settlers in new countries. When the nineteenth century dawned, the children of America were learning to read by the light of pine knots and the crackling of logs of an open fire-place; so closely are we related to what may seem the remote past.

It is hard to believe that the world groped on to the thirteenth century without discovering even the tallow candle; yet so it is. The expression that "mankind was plunged in darkness during the early ages" is true in every sense. It was perhaps the accidental burning of a bit of fat of some slain animal that suggested its use as a luminant, while the hollow shell from the sea, a concave rock, or a mold of sun-baked clay held the fat, which was burned by placing a rush in the fat, with the lighted end projecting over the edge of the rude dish. Step by step the lamp was fashioned into a thing of beauty, though barely a joy forever. Thus came the first improvement in the art of domestic illumination.

Admirable specimens of lamps in terra cotta, in stone, in brass, and in bronze have been found on sites of Hebrew cities and in the temples of Hindustan. From the tombs of Egypt; from the tumuli of Assyria and ancient lettered Babylon; from the opened graves of Chaldean sages, come examples of household lamps, revealing a general use many centuries before the Christian era. Herodotus speaks of a procession of lamps, as a scene of imposing magnificence, and Homer sings of a torch borne upon a staff, its flame no doubt feeding upon the wax from the wild honey, and the resinous gums of the forest trees, nearly a thousand years before the Christ.

So, from the fat of slain animals, the resinous products of the forest trees, and the wax of the wild bee came those lights which gleamed upon fair women and brave men at Belshazzar's feasts, the revels of Dives and the grand balls given by the first Napoleon in the Palace of the Tuilleries.

When men discovered the art of extracting oil from the olive and other vegetable sources the use of the lamp became very general among the wealthy and noble. Only they could enjoy the less offensive methods. Lamps wrought in cunning form of marble, silver, and gold were ornamented with precious stones, inlaid with curious handicraft and artistic workmanship indicate a high position for this method of illumination. Even the terra-cotta specimens, used in

cottages, are graceful in shape with an elegance of finish which no art of modern times can surpass.

Beautiful as indeed they were, of how little practical use! An eighteen-penny lantern of the eighteenth century, with its tin reflector and its bullseye of third-rate glass, diffused a better light than any lamp of Rome or Greece in the days of their greatest glory.

As they knew no method for refining oil, they made it a luxury by mixing with it the perfumes of the rose and of sandal wood. Although detracting from its burning properties, the fragrance was supposed to compensate for diminished light. The flame emitted an enormous amount of smoke, and fluttering in the slightest breeze spluttered out altogether in a gust of wind. At the end of an evening conference a party of noble Romans would resemble a congregation of chimney sweeps.

From Rome the oil lamp passed successively into Germany, Gaul, and Britain. In these countries, torches, rushes dipped in grease and a very odorous fish oil were the methods of artificial lighting until the Roman conquest. The rush-light of that day consisted in a notched wooden stick set in a wooden base. Stalks of the rush were peeled to the pith save for one strand of husk, and passed through hot grease. Sometimes three or more were twisted together and when cold were placed in a notch of the standard, to be pushed up when the fire neared the wood. It emitted a strong flame and a similar odor. You may make one of these, and enjoy for an hour the ancient light of Britain and that which to this day dispels the gloom of night in remote Irish cabins. The candle of the common people was the rush-light of our ancestors. It burned where candles made from wax were too dear and before Chevreul and others found a way to refine a cheap candle grease from the fat of animals.

The Picts and Scots, the Danes and the tribes of Scandinavia had not advanced to the use of the rush-light at the time of the conquest. When torches were necessary they stuck a bit of wood into the body of some fat bird, and supporting the stench as best they could allowed this dismal sort of a candle to burn until the bird became a cinder.

The lamp as brought from Rome continued in use without being greatly modified until well into the thirteenth century, when the invention of candles made an artificial light of comfort to those who could afford it.

The curfew bell which tolled at eight o'clock was no hardship to our ancestors, considering the badness of the lamps which lighted their houses or hovels as the case might be. Through all the mediæval ages, men were supposed to rise at daylight and retire soon after the sun had set.

The first step toward the use of the modern candle was the invention of a tallow torch which came into use about the last of the twelfth century. This remained in use for about a hundred years when the tallow candle either dipped or molded made its appearance, much as it now exists. The haughty barons who forced King John to sign the Magna Charta at Runnymede would have considered a bundle of tallow dips of almost as great value as the rights which they wrung from the unwilling hand of their sovereign. To have stolen one from the kitchen table would have incurred the noose without hope of pardon. Not until the fifteenth century were the burgesses and trades people able to purchase a tallow candle. At the opening of the nineteenth century they were sold singly for about twelve cents each.

Flax being the wick, they burned rapidly. Cotton was more expensive than silk and to use it for wicks was extravagant folly. Three pounds sterling was the price of a pair of cotton stockings one hundred years ago. Tapers made of wax had been in use in churches since the ninth century, but no one ever dreamed of using so expensive and sacred an article for domestic purposes. Toward the close of the fourteenth century they were timidly introduced in a few palaces, and the homes of great noblemen. To offer a wax taper at a shrine was a princely gift, and absolution followed the presentation of a taper weighing one pound. To vow a taper to the Virgin Mary was like vowing a hundred doves to Venus or a heifer to Juno. At a cost of four hundred crowns in gold, King Henry sent two wax tapers weighing twenty pounds each to Thomas à Becket, hoping thereby to appease the great primate of Canterbury.

In the Cathedral of Pisa a ton of bronze slowly swings from the lofty dome. A keen-eyed student watches its regular oscillations as its hundred wax tapers flash upon a thousand worshippers engaged in evening prayer. The great candelabrum, almost a world's wonder at the time, was weaving a message of light in Galileo's brain, and from the cathedral he went away to startle the world with the story of its motion and to reveal the secrets of the pendulum as a means for measuring time. Still swings the chandelier under the cathedral's dome, with the same potent motion as when its flashing lights taught the old astronomer the deeper story of the world's life.

In the year of 1509 a few enterprising chandlers conceived the idea of mixing animal fat with the wax, but the deceit being discovered the king by royal edict debarred every chandler of the realm from making and offering for sale any mixed substance or composite article in the place of wax.

It was no doubt after seeing on his grocery bill that he was paying 36 shillings a dozen for candles that Oliver Cromwell in the year 1654 blew out one of the two candles on his wife's work-table, on the ground of unnecessary extravagance. Louis XV. complained that he could keep a regiment, music and all, with what was spent in lighting the palace at Versailles. It is related of Voltaire, that, when dissatisfied with the salary afforded by Frederick the Great, he used to put in his pocket the wax candle ends of his royal master, and from them turned quite a pretty penny. The cost of lighting the Tuilleries under the first Napoleon with wax candles was about what it would be were the electric lamps of the present day employed —namely, $4,000 per annum. When the Emperor was giving magnificent fêtes at Dresden he often spent six hundred dollars for the wax candles of a single night's carousal.

When, however, wax and tallow had been sufficiently cheapened to allow their use in drawing rooms and boudoirs, the oil lamp and the rush light were relegated to the parlors and kitchens. No room in which costly paintings and gilded furnishings began to exhibit elegance and refinement could tolerate the smoky and greasy contrivances which remained without improvement through the centuries.

Toward the middle of the eighteenth century the number of lamps increased among the poorer classes, owing to the invention of Colza oil. The new liquid was far cheaper than the olive oil used in France and Italy or the whale oil of England and America. Not till then began the processes of lamp regeneration. It was in 1783 that an enthusiastic and radical reformer, one Argand, discovered a lamp which consumed its own smoke and most of the odor. By admitting oxygen to both sides of a flat flame he increased the light so that a shade became necessary. The new lamp was at once popular in France and England. When improved by a convex reflector placed behind the flame, the light was rendered too dazzling for an ordinary room.

Fred and Phillipe Girard improved this lamp, placed the reservoir for oil below the wick; softened the glare by the use of whitened glass, giving the first effect of beauty to artificial light. It is an interesting fact that the first appearance of the new lamp devised by the brothers Girard took place in London at a party given by the Duchess du Barry, then in exile. Josephine, hearing that it was enthusiastically admired, and jealous that it was not first seen at her soirees, ordered the brothers to bring a lamp at once to the palace. The significance of this circumstance is little beyond the fact that the lamp presented by the brothers to the Empress was decorated by a young and obscure artist, struggling for bread, to be later known throughout the world as Jean Auguste Ingres.

On the arrival of the Pilgrims at Plymouth in 1621 they adopted the Indian's method for light and used the pine knots, furnished in abundance by the virgin forests. No doubt the pitchy drippings of these knots were a source of discomfort to the cleanly housewife, and the candle when it came was greatly prized. Cattle were not introduced into the colony until about eleven years after the arrival of the "Mayflower," up to which time candles were unknown except when imported at rare intervals. Elliot translated the Bible by a spluttering, smoky torch. New England literature was spattered by the dripping flame and clouded, perhaps, by the odorous smoke.

There is a long step between the torch of the fathers, still in use at the opening of the nineteenth century, and the electric searchlight, of which it was the humble progenitor.

The forerunner of the street light was the basket torch, fastened to a building at a street corner, or later swung by a chain across the street. This basket filled with pitch pine knots made the place quite light. Such a basket, but of enormous proportions, was swung from a crane at the top of a high place in Boston and gave the name to Beacon Hill.

In the year 1660 candle making became quite common with the pilgrim housewife. Tallow was not plenty, so the fat of the bear and deer was added to the tallow, increasing the light but softening the candle, making is less durable. The method usually employed was dipping, with a few molded candles for "company." To dip, a number of wicks were placed upon the sticks a sufficient distance apart, the wick suspended vertically. These wicks were dipped or carefully lowered into a pot of hot tallow on a cold day. Tallow would adhere and quickly cool. This repeated until the proper size was reached secured the "taller dip" of the "mothers."

Not alone was the oil from the sperm whale used as an illuminant, but the fatty substance which gives the name to the fish was discovered to be most excellent for candles, being more costly, but of greater power. Inclosed in little square lanterns "spermaceti" candles lighted the streets of Boston, were suspended over the front doors of the wealthy, and adorned the front halls of elegant mansions. That which gave happiness to the young eyes of "Dorothy Q.," the grandmother of the genial "Autocrat of the Breakfast Table," is still in existence.

Not until about 1830 did our fathers have a match to carry in their pocket. Up to that time they must light their pipe with an ember or by the tinder box. Should the fire of the hearth go out he must revive it by steel and flint or make a hurried trip to the neighbor's to secure his fire. At an early hour on a cold morning this was no pastime.

In the early days of the last century, Sir Walter Scott, writing from London, to a friend in Edinburgh, said: "There is a fool here who is trying to light the city with smoke."

Sir Walter's "smoke" was not a human invention. It was a product of nature's laboratory. Accumulations of gas from coal beds found their way to the surface, and being highly inflammable attracted the attention of men who erected altars over them, and their perpetual fires were dedicated to the gods. After the defeat of the Persian armies at Platea, two victorious generals, Pausanius and Aristides, were directed by the Oracle to build an altar to Jupiter, and to offer no sacrifice thereon until they had extinguished every altar fire in the country, polluted by the Persians, and had relighted them with the sacred fire from Delphi. It would be natural to expect men of science to imitate a process of nature which held such promise. For thousands of years the Chinese have speculated upon the meaning of the natural gas which has escaped abundantly from the earth in several provinces.

In 1726 Dr. Hales informed chemists that by distilling a few grains of coal, he had obtained an equal number of cubic inches of "inflammable air," and that, if attempted on a large scale millions upon millions of cubic feet of that valuable substance could be made, and conveyed unseen along the highways of the land, and become the means for obtaining perpetual day. In 1813 Sir Walter's "smoke" was burned on Westminster Bridge in London, and one year later the streets of St. Margarets, Westminster, enjoyed illumination from gas, it being the first parish contracting for such a luxury.

The common kerosene lamp, with its chimney of glass, its varied forms of beauty, its shades modified to every grade of vision and of taste, suggests the relation of man to light. The oil, natural, cheap, brilliant and volatile, was long known to civilized humanity as a crude outflow from the earth. It was not until about 1845 that the iridescent scum seen floating on the surface of a stream near Pittsburg suggested to thoughtful men to dig for a greater supply. Indians came from a distance and soaked it from the water with their blankets which they wrung out into vessels in order to secure a quantity for some secret purpose. When the American found it he was rich beyond computation, at the same time providing at a small cost the best fuel and the cheapest light for the common people. It was not until 1860 that it passed into common use. Since that time it has driven every form of wax, grease, fluid, camphene, and whale-oil lamps from the common use of mankind.

From the clouds overhead, lowering along the horizon as the sun goes down, Franklin and Edison have drawn the electric fire and in our chambers darkness is unknown. All the way from the pine knot to a nightless day has been won from the darkness in the lifetime of one man and he but just reaching the century point.

This is the Age of Light. FRED. HOVEY ALLEN.

On the Lake Erie & Western Railroad, which belongs to the Vanderbilt group, an experiment is to be tried in electrification. It has been determined, according to report, to install electric motors upon portions of the Peoria division where the competition of electric surface lines is keenest, with a view of trying to recover some of the passenger traffic which the road has lost. If the experiment on this division proves successful, it is likely that before another year is ended the Lake Erie & Western will have an electric passenger service all the way between Lafayette and Indianapolis, and will later extend such service to cover every mile of road which comes in competition with surface lines.

The transporter bridge that is being erected across the river Mersey between Widnes and Runcorn, and which was described in a recent number of the SCIENTIFIC AMERICAN, is rapidly approaching completion. The most difficult part of the undertaking has now been successfully accomplished. This was the suspension of the two aerial cables, of a span of 1,000 feet, which are to carry the suspended traveling deck.

GLASS MODELS OF MICROSCOPIC FORMS OF LIFE—AN INTERESTING ART.

To the layman anything connected with the countless minute protoplasmic forms of animal life that exist in the sea and the waters of the land is a mystery. As the scientist becomes acquainted with them and informed concerning them by means of close study and microscopic research of a most exacting and painstaking kind, it seems an undertaking of considerable difficulty to place before the general public, in our museums, an accurate and at the same time comprehensible representation of these vastly interesting specimens of animal life. To show these animalculæ by means of drawings or even colored illustrations is at best unsatisfactory to the unscientific eye. To give a correct representation of these curious living forms, models are necessary which portray the intricate and sometimes even marvelously involved form of the animalcule. Such models must be made of some material capable of being worked with ease into any desired shape, a material that may be colored any desired tint and that will give a correct idea of the qualities and substance of the original. Many of these animalculæ are transparent or translucent. Especially is this true of marine forms. Hence the material of which the models are to be made must possess these properties. Of course the best available substance is glass. However, the skill and training necessary in the making of these glass models are so great that up to a short time ago it had not been accomplished in this country, though it has been done successfully in Europe, the few models of this kind to be found here having been made by Blascha in Germany.

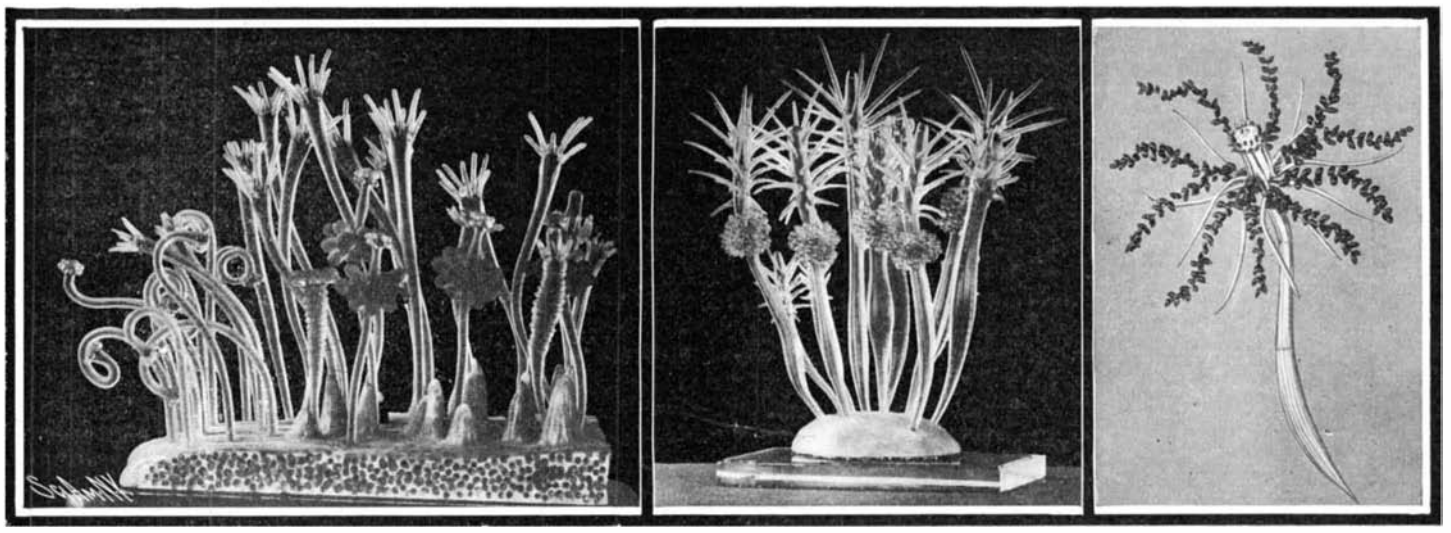

Hydroid Polyps. Hydroid Polyps. Hydroid, Natural Size.

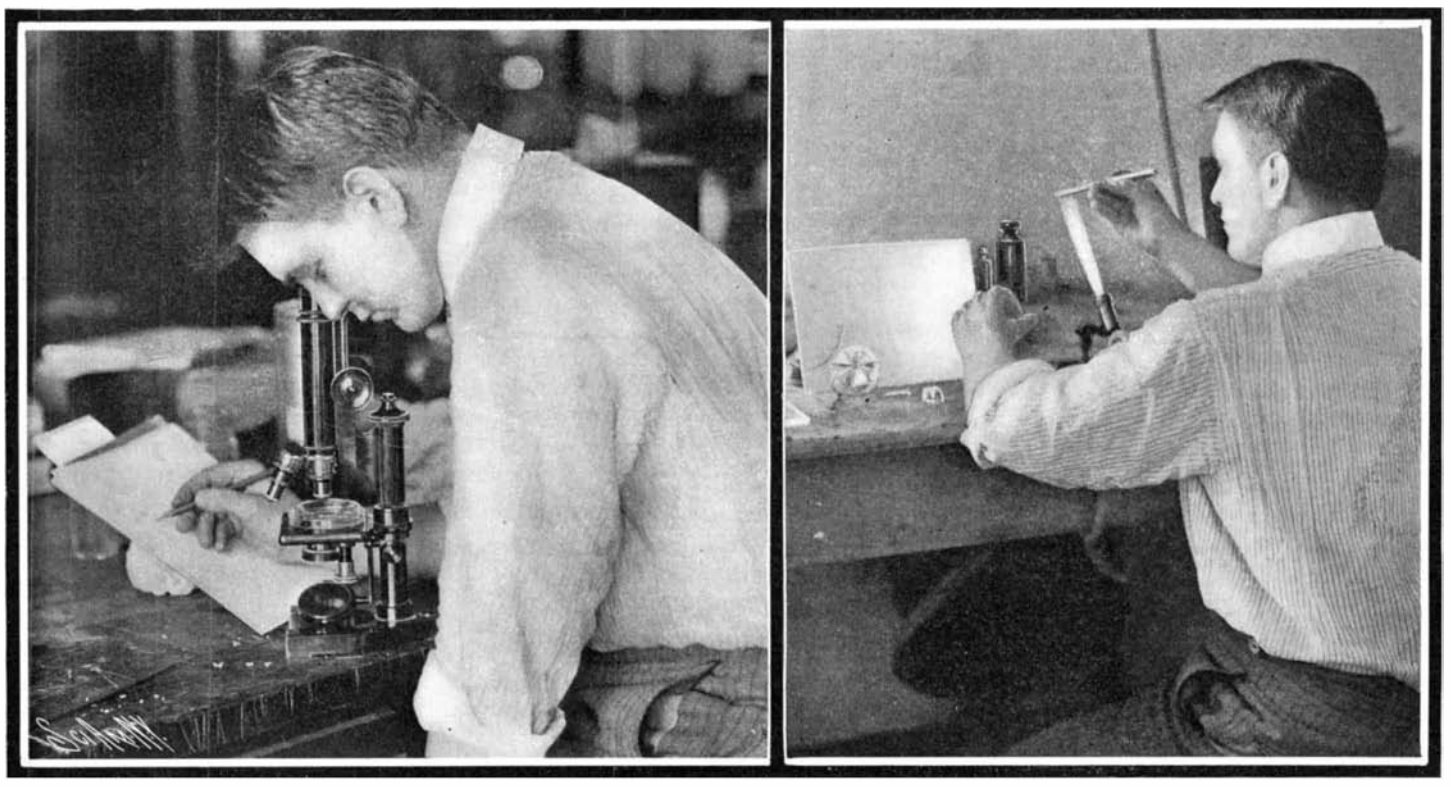

Studying a Specimen Through the Microscope. Fashioning a Glass Model.

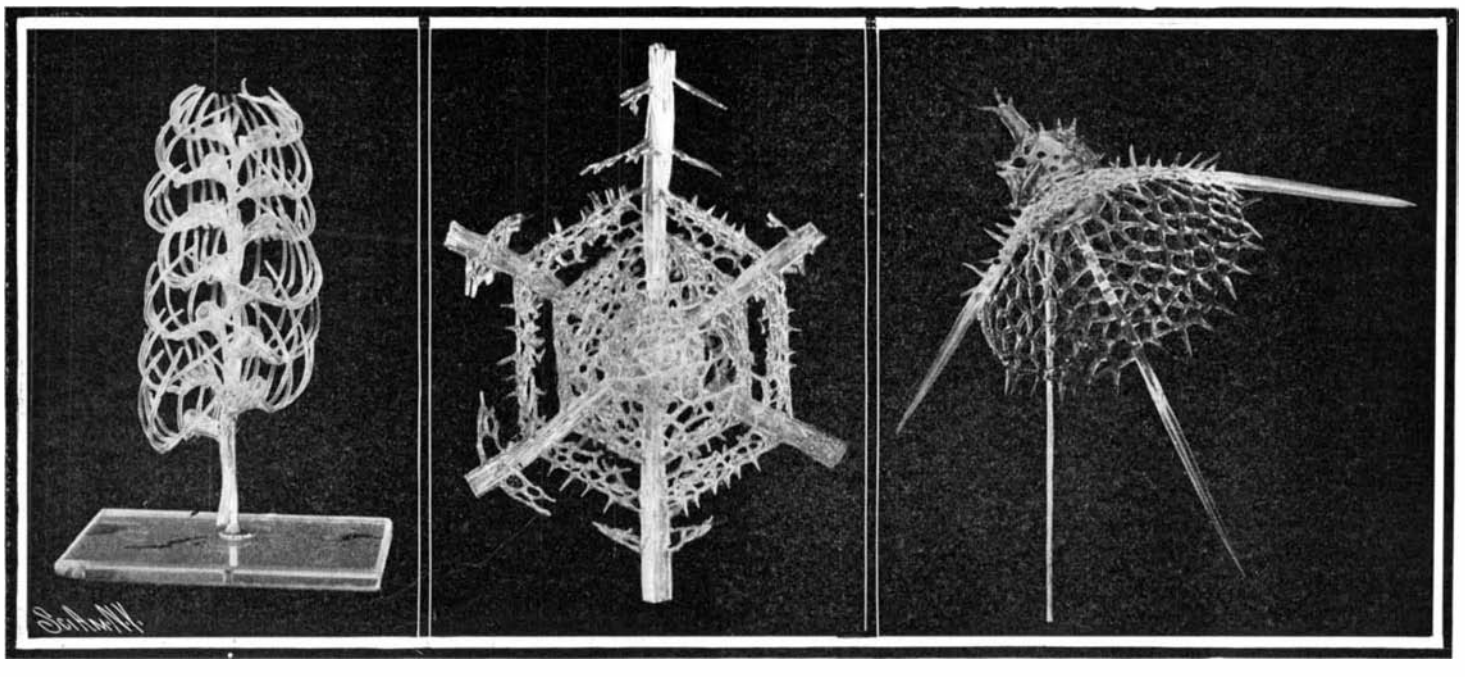

Bryozoan, Bicellaria Bella. Protozoan. Siliceous Skeleton of a Radiolarian. Protozoan. Also a Radiolarian.

GLASS MODELS OF MICROSCOPIC FORMS OF LIFE—AN INTERESTING ART.

At the present time a considerable number of these beautiful representations of protoplasmic life are to be seen at the Museum of Natural History in New York, where they have been made by Mr. Mueller, a glass worker, under the direction of Dr. Dahlgren, of the Department of Preparation. Aside from the impossibility of distinguishing or even seeing many of these organisms with the naked eye, the glass models exhibit the form, structure, and color far better than the actual preserved specimen; for preserved specimens usually lose their natural shape and color in spite of and often through the action of the preserving medium.

When one of these models is to be made the animalcule is first microscopically examined, magnified from 10 to 700 or 800 diameters, and is then carefully studied, sketched or modeled in clay. The model is then painstakingly built up, piece by piece, the branches, tendrils or filaments being added one by one by means of the blowpipe, each member receiving its proper shape and formation by the most delicate manipulation of the blowpipe and other instruments of the glassworker's art. The extreme delicacy and nicety of this work, the accuracy and patience necessary, need no comment. A glance at the accompanying photographs of the completed models is sufficient.

Many of the models on exhibition at the Museum of Natural History are of the class of Protozoa, too small to be seen with the naked eye, composed of a single cell, and such as are popularly known "to be found in a drop of water." One of our photographs shows a model of the siliceous skeleton of one of these, a radiolarian found at the depth of perhaps thousands of fathoms and entirely invisible to the naked eye. Although from a biological standpoint a simple structure, it is very complicated and marvelously wrought. This skeleton is invested in a protoplasmic capsule which forms the living portion of the organism.

Another photograph shows a model of a Bryozoan (*Bicellaria bella*), also an inhabitant of the deep sea. It is very minute but much more highly organized than the preceding type. While the individual organism is almost indistinguishable to the naked eye, it often forms colonies as large as a watermelon. One particular species of Bryozoa occurs in the immediate vicinity of New York, and Mr. Mueller is at present at work on a model of a specimen of this kind.

A third illustration shows a group of hydroid polyps magnified about twenty diameters, presenting a beautiful flower-like appearance with long contractile stems and waving tentacles attached in a circle about the mouths. They are bound together by, or rather arise from a network of tubes invested in a chitinous framework, which, with the tubes, is part of the organism. Some of these polyps are used to nourish the organism while others containing stinging cells protect it. Moreover, in case of danger the stems can contract till protected by the spines at their base. This organism is found spreading over dead shells usually such as are inhabited by a hermit crab and to

the unaided eye presents simply the appearance of a fine, almost colorless fuzz.

A fourth photograph represents a model, natural size, of another hydroid. The original of this model is a deep purple in color and exhibits in a striking way the peculiar flower-like beauty so characteristic of organisms belonging to this class. The last two photographs are of models of organisms similar to one or the other of those described above and the similarity is easily seen.

For courtesies extended in furnishing the information contained in the foregoing account, we are indebted to Dr. Dahlgren, of the American Museum of Natural History.

THE NEW YORK SUBWAY INSTRUCTION CAR.

That the man in charge of a train to run in New York's Subway may be entirely competent to fulfill his responsible position, the Interborough Rapid Transit Company is using an instruction car, where the prospective motorman may be taught something of the construction and operation of the apparatus he is to handle. In this instruction car, the applicant is shown the use and mode of operation of every piece of mechanism that will come under his charge, is taught how to handle it and what to do in almost every emergency that can arise.

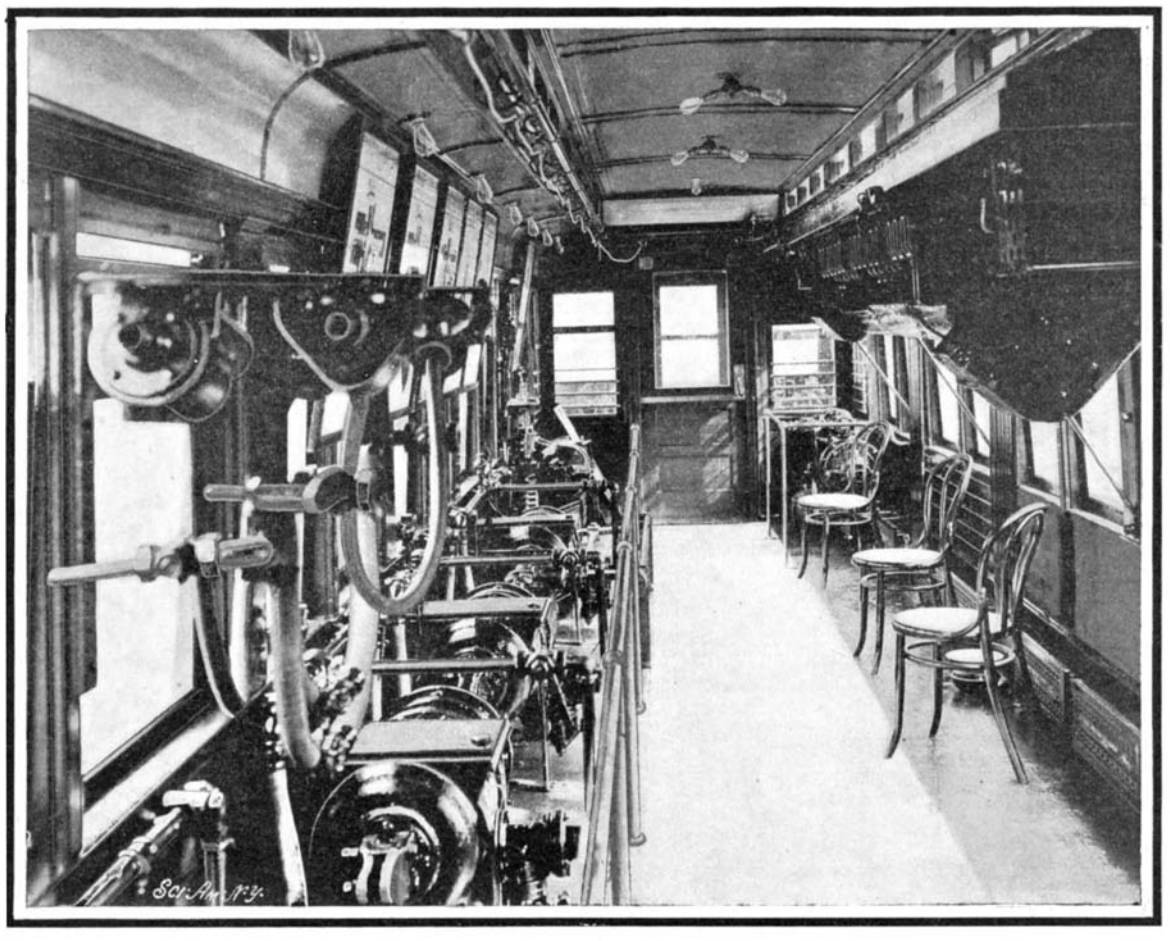

INTERIOR OF THE CAR USED FOR THE INSTRUCTION OF NEW YORK SUBWAY MOTORMEN.

The school car is similar to the regular service cars to be run in the Subway, with the Sprague-General Electric multiple unit system of control. The apparatus is uncovered for demonstration purposes wherever possible—master and air-brake controllers, contacters, reverser, pump governor, switch-board, and the like. Portions of the apparatus underneath the car have, where possible, been placed inside of it to facilitate the explanation of their operation. In the case of the motors, motor resistance, and air pumps this, of course, was thought to be neither feasible nor necessary.

In addition to the regular equipment the car contains a complete air-brake outfit for a six-car train, operated from the brake controller which is used to make the men familiar in all details with this complicated mechanism. It contains, moreover, a defective triple valve, the presence of which the men must detect after a certain amount of teaching. To facilitate the instruction there are additional parts, such as the auxiliary reservoir and the brake cylinder, with portions of the metal cut away to permit the instructor to explain their operation fully. A triple valve similarly cut away, and connected in tandem with another operating triple valve, fully demonstrates the working of this complicated piece of mechanism. To supplement all this a series of colored drawings show the details and operating positions of every important piece of apparatus. A section of contact rail with the rail shoe is used to teach the men what to do in case of trouble there. An automatic car coupler and drawbar is installed for a similar purpose. A complete set of controller and air-brake couplings is employed to demonstrate their use in operation or emergency.

The safeguards in the system used are manifold, and so complete that only a rather inventive mind can conceive any situation which the prospective motorman has not been taught to meet. Should the motorman release the controller handle while it is in a running position, not only would the current be immediately shut off but the emergency brakes would at once be set and the train brought to a stop. Should he attempt to reverse his motors while running, the same thing would happen. The controller is automatically governed and no matter how fast the handle is turned, the motors are started at a certain fixed speed. Should the contacters adhere or fuse, the current is automatically shut off. Should the motorman not see or ignore a signal to stop, the brake is automatically tripped and the train brought to a standstill. The train may be run from any motor car, or any motor car may be cut out and used as a trailer. The wiring insulation is as nearly perfect as it can be made, and the steel cars are fireproof.

The prospective motorman is thoroughly drilled in the school car by a competent instructor not only in use of the mechanism but also how to act in cases of emergency. This personal teaching is supplemented by an excellent book of instructions containing about 150 questions and answers of a practical nature, with cuts and explanations of all the apparatus. This the motorman is expected to study closely and thoroughly. From time to time his knowledge of its contents is tested in examinations. Should he be of an inquiring turn of mind he is further allowed the privilege and opportunity of entering the shops and studying the entire system in detail, as much as he desires.

SIDE-DOOR COACHES FOR WORLD'S FAIR SERVICE.

BY CHARLES ALMA BYERS.

The use of side-door coaches for quick service on railroads is rapidly growing into popularity. The advantages pointed out some time ago by the SCIENTIFIC AMERICAN of side doors for passenger coaches over end doors have been fully realized. Actual experiments have clearly shown the theory that a train of coaches thus constructed can handle a crowd of passengers much more quickly to be absolutely practical. The first real test of this theory was made by the Illinois Central Railroad at the Chicago Exposition in 1893. That experiment proved satisfactory in every way, and as a consequence the Wabash Company has followed suit by using coaches of such construction for its shuttle trains between the Union Station and the World's Fair grounds at St. Louis. The construction of the Wabash's side-door coaches, however, differs slightly from that of those used by the Illinois Central. This difference is noticeable mainly on the interior. Instead of an aisle on each side, there is only one through the center, as in the ordinary coach. This is probably an improvement so far as affording more space for seats is concerned, but the plan undoubtedly detracts from the real object of the side doors—that is, of allowing the cars to be the most quickly filled and emptied. Another difference is that the Wabash's coaches have only four doors on each side, or eight in all, while those used by the Illinois Central had ten to the side, or a total of twenty. This is also a feature in which the Illinois Central surpassed in the matter of constructing a coach so as to be more quickly filled and emptied. Nevertheless, the time which is required for filling or emptying a Wabash coach of passengers is remarkably short as compared with the ordinarily constructed car.

The length of the Wabash coach is 50 feet and its seating capacity 92. Straps, however, are provided for standing passengers, as in a street car, and if neces-

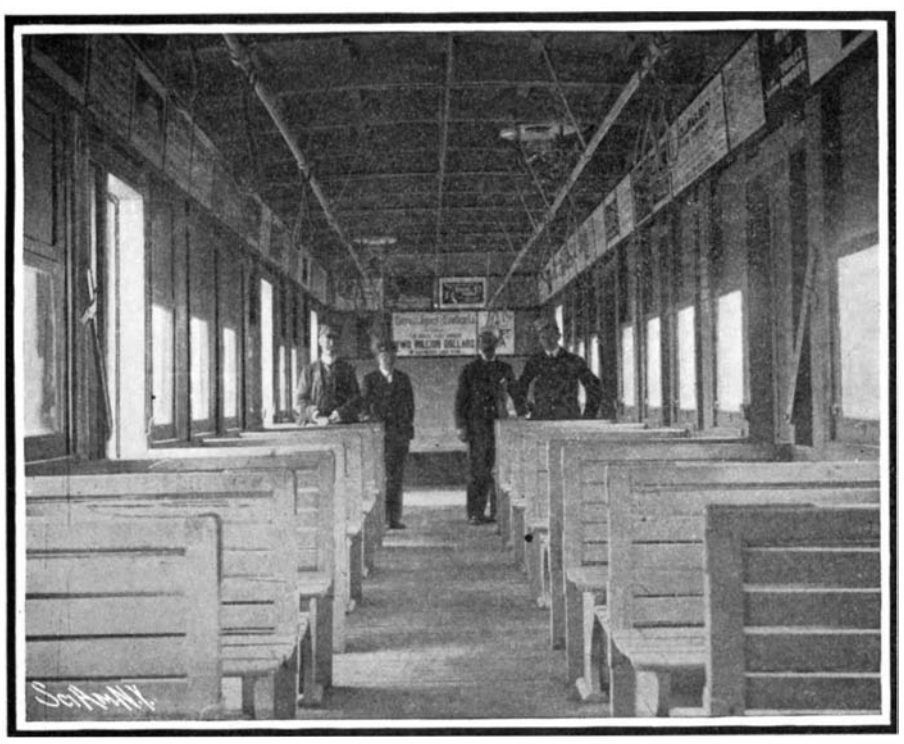

Interior of the Side-Door Car.

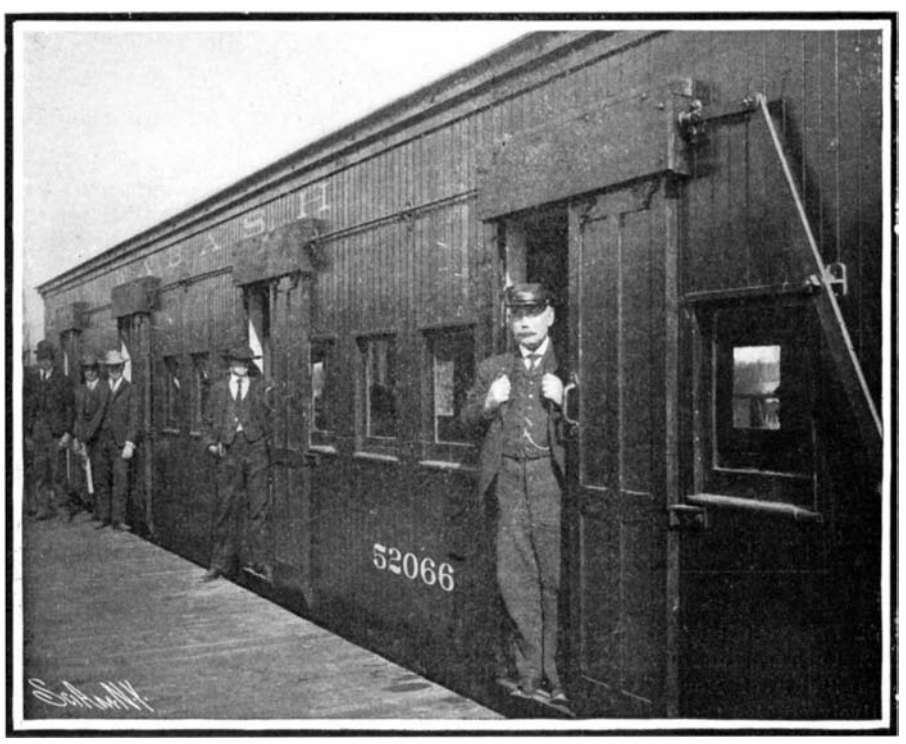

View Showing Side Doors and the Lever by Which They Are Opened.

SIDE-DOOR COACHES FOR WORLD'S FAIR SERVICE.

sary one can be made to accommodate as many as 120 persons. The doors are so arranged that all are opened together by one move of a lever, but are closed separately. The platforms at the stations being level with the floor of the coach, no steps are necessary, and consequently much time is saved in this way. These cars have been especially constructed for World's Fair service, but I am told it is the intention of the company to convert them into furniture cars as soon as the Exposition closes. On this account the springs first put under the coaches were made too strong, and the temporary abandonment of the use of the cars for a few days has therefore been made necessary in order to remove a couple of leaves and make them weaker.

For their shuttle-train service at St. Louis the Wabash has a double track running all the way from the Union Station to the World's Fair grounds; and, with the exception of a short distance, these tracks are provided with automatic electric block signals every 1,200 feet. Fifteen minutes is the time required for a one-way trip, and at present the trains are being run each way fifteen minutes apart. If at any time, however, the business demands it they may be run every five minutes. Each train may contain as many as ten coaches, and if thus forced to the limit it is possible for the system easily to handle 25,000 an hour. The total number of persons handled by the Wabash on the opening day of the Exposition was a little over 17,000, and consequently it will be seen that a rush is not apt to occur. The number of side-door coaches constructed for the system is 150.

ICE-CUTTING MACHINE.

Pictured in the accompanying engraving is a machine for cutting blocks of ice into small pieces for use in hotels and other establishments. The machine will be found very useful, owing to its arrangement, which permits of quick and convenient handling of the block during the cutting operation. The machine comprises a feeding table over which the block of ice is moved to successively engage the cutting devices. These consist of gangs of circular saws on shafts disposed at right angles to each other, and thus adapted to make intersecting cuts in the ice block. The ice block is first moved against the saws shown at *A* in the illustration, which make a series of parallel cuts in the block, and then against the saws shown at *B*, which make a series of parallel cuts intersecting the first series. The ice then presents the appearance shown in our detail view. The block is now moved against a horizontal band or link saw which makes a horizontal cut, cutting off the cubes formed by the previous saw cuts. These cubes drop into a chute which conveys them to a suitable receptacle. The main body of the ice block, however, slides over the band saw, ready to be moved again against the gang saws at *A*. The process is then repeated until the entire block has been cut up into small cubes. The machine is provided with fast and loose pulleys, which carry the belt that drives the cutting mechanism. The shafts which carry the gang saws are geared together and also to the pulleys of the band saw so that all the saws turn in unison. A patent on this machine has been secured by Robert Mowery, Hot Springs, Ark., and John D. Tellman, care of Hotel Jefferson, St. Louis, Mo.

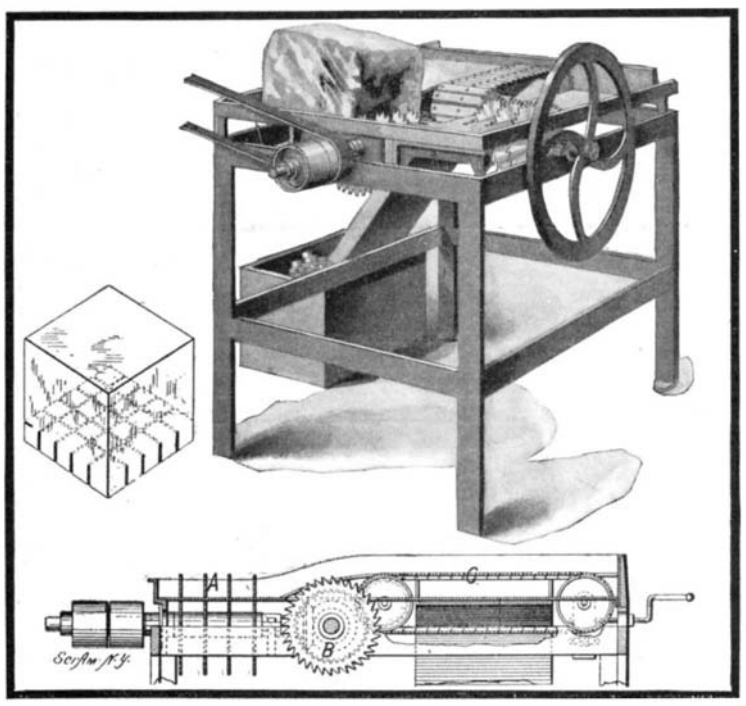

ICE-CUTTING MACHINE.

The Chicago River Tunnels.

Lowering the Chicago River tunnels has been reported on by Col. O. E. Ernst, U. S. Enginers. He recommends that the Washington Street and La Salle Street tunnels be lowered to give a depth of 26 feet in the river, on the ground that such a depth would be required to carry 8,000 cubic feet of water per second without making a too rapid current. This amount of water must ultimately flow through the river to the drainage canal. The time for completing the work is to be limited to May 1, 1907, but the tunnels are to be removed so that half of the channel shall be open to navigation by April 1, 1905, says Engineering News. It will be necessary to abandon these tunnels at once, and cofferdams will have to be built to the center of the river, enabling the contractor to build half of the new tunnel while leaving the other half of the stream free to navigation. Regarding the Van Buren Street tunnel, Col. Ernst reports that no cofferdam work will be necessary and the reconstruction may be carried on without interfering with the use of the tunnel.

Death of Prof. Ratzel.

Prof. Friedrich Ratzel died on August 9. He is best known to Americans by his splendid work, "The United States of North America," in which he exhaustively studied the natural resources of the United States and their relation to its population. His work on "The Political Geography of the United States" and many other works of an ethnological and geographical character are likewise well known.

THE DIRECT PRODUCTION OF PHOTOGRAPHS IN COLORS BY A NEW METHOD.

Messrs. August and Louis Lumiere, the well-known French experimenters and manufacturers in photographic products, have recently described in a communication to Focus their latest experiments toward the attainment of direct colored images by photography, which are novel. The method is based on the following theories:

If a collection of microscopic elements, of a transparent nature and colored respectively red-orange, green, and violet, be spread on the surface of a glass plate in the form of a single thin coating, it will be found, if the intensities of coloration of these elements and their number be correct, that the coating so made does not appear colored when examined by transmitted light, and also that this coating absorbs a fraction only of the light transmitted.

The light rays in passing through the elementary screens, orange, green, and violet, reconstruct white light, if the number of surfaces or elementary screens for each color, and the depth of coloration of these, are in accordance with the relative proportions of those which are found in white light.

This thin trichromatic coating being formed is then coated with a sensitive panchromatic emulsion. If the plate so prepared is submitted to the action of a colored image, taking the precaution to expose through the back of the plate, the luminous rays pass through the elementary screens, and undergo, according to their color and the screens they encounter, a variable absorption before having any influence on the sensitive coating.

By this means a color selection should be effected by means of the microscopic elements and making it possible to obtain, after development and fixing, colored images in which the tones are complementary to those of the original.

If, for example, we take a portion of the image which is colored red, the red rays are absorbed by the green elements of the coating, while the orange and violet elements allow the passage of those rays.

The coating of panchromatic gelatino-bromide emulsion will therefore be acted on beneath the violet and orange screens, while remaining unaltered under the green screen.

Development reduces the bromide of silver sensitive coating, and so masks the orange and violet portions of the image, while the green portions appear after the plate is fixed, because the emulsion covering them has not received light action, and so is transparent after fixing; the result obtained in this case is therefore of a green color, which is complementary to the red rays dealt with. Similar phenomena are produced with other colors, as, under the action of green light the green screens are masked, and the coating would appear of a red color; with the use of yellow light the image would appear violet, and so on in like manner with other colors.

It follows that with a negative showing complementary colors obtained in this way it is possible to obtain, with plates prepared in this manner, positive prints which will be complementary to the negatives, i. e., reproducing the colors of the original.

Also, after development, and before fixing of the negative image, that image may be reversed, and, by the known processes, a positive image may be obtained, showing the colors of the object photographed.

The difficulties we have met in the application of this method are numerous and considerable, but the results obtained show that those difficulties may be overcome. It will suffice if we indicate a few of the more important conditions, showing the delicacy of the problem before us.

A coating must be prepared, formed of microscopic screens, orange, green, and violet, which coating it is necessary should adhere to its support and be extremely thin, that the coloration of these microscopic elements or screens should be exactly determined as regards intensity, quality of color, and the number of elements of each kind. It is also necessary that these colors should be stable, that they do not diffuse, and that there is no superposition of color screens or elements, nor gaps between them.

It is further essential that the photographic sensitive emulsion should be orthochromatized in a manner which shall not falsify colors, and that this orthochromatism should be in relation to the nature of the emulsion and the colors of the elementary screens. This coating of emulsion must also be of a special nature to avoid diffusion, and the manipulations, development, exposure, etc., must be of a nature suitable to these preparations. The simple enumeration of some of the conditions necessary to be filled shows how essential are care and method to the success of such processes.

This research is not entirely finished, but we indicate hereunder the practical position to which we have brought the process at the moment. We first separate in potato starch, and by the aid of apparatus made for this purpose, the grains having a diameter of from the fifteen-thousandth to the twenty-thousandth of a millimeter. These grains are divided into three parts, and colored respectively red-orange, green, and violet, by the use of special coloring matters, and by a process too prolonged to describe here.

The colored powders so obtained are mixed, after complete desiccation, in such proportions that the mixture shows no dominant tint. The resulting powder is spread by a brush on a sheet of glass covered with an adherent or sticky coating.

With suitable precautions we obtain a single coating of grains all touching and without superposition. We then stop, by the same process of powdering, the spaces which may exist between the grains, and which would allow the passage of white light. This stopping is accomplished by the use of a very fine black powder, as for example, charcoal.

We have by these methods formed a screen in which each square millimeter of surface represents two or three thousand small elementary screens of orange, green, and violet. The surface so prepared is isolated by a varnish possessing an index of refraction as near as possible that of starch. This varnish must also be as impermeable as possible, as it is coated with a thin layer of panchromatic gelatino-bromide emulsion. Exposure is made in the ordinary manner, in a photographic camera, taking the precaution always to turn the glass side of the plate to the lens, in order that the light may pass through the color particles before reaching the sensitive emulsion.

The necessity of employing emulsions of an extremely fine grain, and in consequence of a lower speed, and the superposition of a coating formed of a system of microscopic screens, render the necessary exposure longer than for ordinary photography.

Development is performed in the same manner as ordinarily, but as we have said, if the negative be fixed with hyposulphite, a negative is obtained which shows by transparence colors complementary to those of the object photographed.

If it is desired to obtain correct colors, we must, after development, but without fixing the image, proceed to reverse it by dissolving the reduced silver, and then by a second development reduce the silver which has not been primarily acted on by the light.

We see then that by simple manipulations little different from those used in ordinary photography, it is possible to obtain with these special plates, prepared as indicated, the reproduction, by means of a single plate and a single exposure, of objects in their natural colors.

A breach has been made in the Manchester Ship Canal at Runcorn, and when the tide is out water pours into the bed of the river Mersey at the rate of 70,000 to 100,000 gallons per hour. As, however, the tide sweeps into the canal twice in every twenty-four hours, no appreciable difference appears to be made in the level of the waterway. The danger lies in the possible undermining of the wall at this point. The "burst" has occurred at a point where there was experienced great difficulty in building the wall.

At the Kleinfontein shaft, in the Transvaal, 858 feet of sinking was done in the first five months of 1903. The dimensions were 21 feet by 6 feet, the rock was hard, and the maximum rate of progress in May was 7 feet 2.2 inches per hole bored, there being 4,032 holes, or 144 rounds.

Correspondence.

The Trap-Door Spider.

To the Editor of the SCIENTIFIC AMERICAN:

In your issue of the 30th July, is an article by C. E. Hutchinson, on "A Trap-Door Spider," placing its habitat in California. It has always seemed strange to me that this spider is assigned to the Pacific Coast when I know that it is found in numbers, at least in one place, on the Atlantic Coast.

Upon what used to be known as the Tidyman plantation (The Marsh), on Minim Creek, North Santee, South Carolina, when I was a boy, about the years 1850-1860, there were many of these trap-door spiders; and I must say that this is the only place where I have ever seen them. In front of the house there was an open grass-covered lawn of perhaps four or more acres, and many times I have amused myself hunting for the trap-doors of the spiders' tunnels. And I well recollect how interested I have been at the strength of the spiders in holding the doors shut as I attempted to open them. My recollection is that the spiders were stout, and possibly ¾-inch long; and that the tunnels were about ⅝ inch, or ¾ inch in diameter. Forty-four years have passed since I have been on the grounds, but the trap-door spiders were there at that time, and probably are there still.

This is why I have always been surprised to see this spider invariably written of as a native of California. ARTHUR P. FORD.

Aiken, S. C., August 9, 1904.

Is Electricity as a Motive Power Unhealthful?

To the Editor of the SCIENTIFIC AMERICAN:

Anent the very pertinent question raised by Mr. Albert W. Dennis, in your issue of July 30, in an article entitled "Are Pressmen Affected by Electricity from the Belts?" the inference drawn from Mr. Dennis' observations and remarks would be that electricity as a motive power is unhealthful for the operatives, and others who, from choice or duty, remain near the belts or motors charged or driven with or by electricity.

As one of the pioneers in the electric field, I could not for a moment allow this impression to go abroad unchallenged.

It is clear that Mr. Dennis is a close observer, and has the welfare of his employes at heart. Both of these traits are in the highest degree commendable. It is also clear to any one at all familiar with the practical operation of electrically-driven plants, that one of three things must be the matter.

First. If the electricity carried by the belts escapes from the motor the insulation is defective, and needs immediate attention, to save waste of current and loss of power.

Second. If the current does not escape from the motor, but on the other hand it is frictional electricity with which the belts are charged, it is clear that the belts are slipping, with a resultant loss of travel and power, and they should be tightened until the vagrant current disappears. If it is not convenient to tighten the belts to a point where the generation of current ceases a pulley cover of rubber applied to the face of the pulleys would be advisable.

Third. If the motor is hot enough "so that the atmosphere always seems to be hot and surcharged so as to induce a sort of feverish feeling about the temples, etc.," as Mr. Dennis describes, it is clear that the motor is overloaded, as the resultant heat from a motor suited to its load should be nil. After remedying the electrical discharges, and other troubles as above outlined, Mr. Dennis will probably find that it is lack of ventilation and not electrical troubles his people have been suffering from. The homeopathic doses of magnetism or electricity one would be able to receive in a few minutes' stay in a press-room as described, would be too infinitesimal to be appreciable and certainly not so liable to cause nausea as a combination of hot air, printers' ink, and machine oil in a poorly-ventilated room.

That the magnetic influence of motors operated in close proximity to the human body from day to day for long periods under proper conditions is of great benefit to the person so brought within its influence, is the firm belief of the writer, and he has yet to see, in nearly twenty years' experience and observation in the various fields of electrical work, a single instance where it was not beneficial. When Leo Daft, Thomas Edison, Vanderpole, and F. J. Sprague began the crusade (along different lines but all leading to the same end) which led up to the abandonment of the hay motor (mules and horses), in favor of electric traction, and incidentally the adoption of the electric motor for all kinds of motive power, there was no other school than experiment and observation in which to learn the mysteries of the subtle fluid, consequently many of us were graduated from it.

The writer well remembers the many cats killed by the electric cars on the first roads equipped, while taking their evening electrical bath by rolling along between the rails of the road bed.

Pussy, like man, has grown wise to the fact that the cars sometimes kill, and while she may yet be seen in the early evening disporting herself near the rails it is rare indeed nowadays to find one which has been killed by the cars on the older roads. The writer having been a horse-car man previous to the advent of electric traction, was quick to note the antics of the cats, and was led to investigate the influence of electric traction on man. After transforming several horse-car lines to electric lines, and converting the drivers into motormen, it was noted that invariably the health of the men began to improve and they began to take on flesh. As they were running over the same route as formerly, and were exposed to the same weather conditions (the vestibule not having been invented), there was no way to account for improved health, snap, and vigor, except as the result of the imperceptible magnetism of the motors, or the proximity of heavy electric currents.

While the writer was superintendent of the San Antonio (Tex.) Street Railway in the early nineties he called the attention of Dr. F. M. Hicks, the company's surgeon (and one of the most noted practitioners of Texas to-day), to his observations as above. Shortly afterward Dr. Hicks requested me to take on two consumptive citizens from Illinois as motormen. They were accordingly installed, and in a few months were both apparently restored to robust health. It is true that San Antonio is a healthy resort for this type of disease, and if there was no sequel to my story it would lose its point. Now for the sequel! After about two years' service one of these left the employ of the electric railway and retired to a farm on the outskirts of the city; within a year his disease returned and he died. The other continued in the service for several years, and when the writer saw him last, he seemed still to be in the same robust health; he informed me, however, that he quit the road for about six months, at one time, and returning ill health warned him to again go back to the service, which he did and is now at work in Houston. Another horse-car conductor in a poor state of health was changed to the electric cars and after running for two years his highly nervous, emaciated form had rounded out to magnificent proportions at the time he left the service to embark in the cattle and horse business. In less than two years after abandoning the motor cars he died from nervous debility and exhaustion. An engineer from Indianapolis, Indiana, who came south for his health, was recommended by the writer and put in charge of the press-room plant of the Daily Express operated by electric motors. The Daily Express building is a magnificent example of the modern publishing house, and its press-rooms as well as all other parts of the building is thoroughly ventilated, and although the work was wholly night work, and he was thrown continually in close proximity to the motors, belts and presses, of such an establishment, in two years he was thoroughly sound and well, and returned to the north to again take up his occupation of steam engineer.

Many instances could be cited and substantiated of the above nature which have come under the observation of the writer if space permitted, but as it does not I will content myself by calling attention to the fact that the census reports show that during the last decade the health of the principal cities greatly improved and the death rate was considerably lower than formerly.

As the period between 1890 and 1900 witnessed the almost universal adoption of electric traction, and the electric motor in our cities, and millions of our citizens were thrown within the gentle and stimulating (although imperceptible) influence of the motors in their daily rides on the cars, or in the various occupations operated by motors—is it not worth while to consider whether or not the adoption of electricity as a motive power has not had as much to do with improved health conditions in our cities as "improved sanitation," which is usually given all the credit?

J. W. GREER.

Yoakum, Tex., August 2, 1904.

The Current Supplement.

The current SUPPLEMENT, No. 1495, opens with a splendid picture of an exhibit of rock and ore crushing and screening machinery in the Mines Building at the St. Louis fair. The St. Louis correspondent of the SCIENTIFIC AMERICAN describes the machinery briefly yet clearly. From the same pen is published an illustrated article on "Geronimo" and an account of the 1,000-horse-power compound French engine and dynamo at the fair. An excellent picture of the engine in question also appears. An article entitled "The Aeroplane" by M. Rudolphe Sorean, outlines some of the difficulties met with in the construction of an aeroplane flying machine. George E. Walsh writes instructively on "Briquette Fuel Materials." "Sewage Purification" is the title of an article by C. M. Ginther, which is excellently illustrated. Emile Guarini writes on the Krieger electric automobile. Very few are aware of the notable service rendered to farmers and gardeners throughout the entire growing season by the common toad. The usefulness of this despised animal is eloquently set forth by A. H. Kirkland. The report of Mr. W. Ripper, of the University of Sheffield, on observations of the Mosely Educational Commission, begins in the current SUPPLEMENT. Of electrical interest are articles on some new experiments with cathode rays and the Janus telephone system.

Calxia.

Calxia is a new substance destined to take the place of terra cotta and plaster in the majority of their applications, principally with regard to the manufacture of small objects and the covering of surfaces of moderate size.

The various ingredients that enter into its composition impart to it remarkable hardness and cohesion and at the same time great plasticity.

The proportions are as follows:

Water	30 parts
Albumen	10 parts
Sulphate of magnesia	4 parts
Alum	9 parts
Sulphate of calcium, roasted	45 parts
Borax	2 parts
	100 parts

The preparation of the mixture must be conducted with great exactness, otherwise it will lose some of its qualities. First dissolve 10 parts of albumen and 9 parts of feather alum in 30 parts of water, which liquid is used for mixing to a convenient consistency, 45 parts of burnt sulphate of calcium, 4 of sulphate of magnesia and 2 of borax. The product obtained is a paste which is molded by the usual processes. As soon as it has "set" it is placed in a stove at 60 deg. C. It is very important not to exceed this temperature, otherwise the composition will crumble. In order to increase its hardness and to render it inalterable in the air, it is well to plunge it for a minute into a receptacle heated in the water-bath and containing oil boiled with litharge with Carnauba wax added. Then it is again put in the stove to be dried at a temperature of only 35 deg. C. Heat and humidity have after that no more effect on it.

It is easy to give to the piece thus obtained the shades of fired stoneware by coating it with a solution of alcohol and sandarac and sprinkling on powdered sandstone when it is still fresh. The light parts of the color are done with liquid enamels applied cold and placed in the stove at 60 deg. C. The tints are unalterable and adhere very firmly. Any desired effect may be produced and veritable objects of art be created bearing the imprint of the personal taste of the maker and adaptable to decoration in all imaginable forms. These manipulations are productive of appreciable advantages. First of all, this material possesses great solidity, which enables it to withstand shocks which would be fatal to plaster and terra cotta. Nevertheless, it is very light and this fact is of interest when it comes to ornamenting interiors by means of statues, bas-reliefs, friezes, cornices, and various applications, whose weight must needs be limited.

Its great resistance to flexion and traction is utilized in the manufacture of consoles, sockets, pedestals, socles, and tablets destined to support considerable weight.

Finally, a very important advantage possessed by the new substance should be noted, viz., its imperviousness to hot and caustic solutions. At an epoch where antiseptics are more and more becoming the order of the day and dust is pursued by all available means it is indispensable to be able to decorate interiors with objects or applications which can be asepticized frequently and in a thorough fashion. In conclusion, let us state that the low price of the raw materials and the simplicity of the manipulations, which anybody can carry out, reduce the cost of calxia to one-half of that of terra cotta.—La Nature.

Twenty-four ovens in the new Semet-Solvay plant of the Milwaukee Coke and Gas Company have begun operation, and the remaining fifty-six will be started soon. Each of the ovens requires, every twenty-four hours, 7.5 tons of coal, and the product of the twenty-four ovens now runs to about 130 tons of coke a day. When the eighty ovens are in operation, the daily product will be between 450 and 500 tons. The gas now generated by the ovens is being used to heat the newer ones, but there will be a surplus of about 3,000,000 cubic feet a day, of which the company desires to dispose.

The number of furnaces in blast in the United Kingdom for the quarter ended June 30 last was 329, and the estimated make of pig iron for the half-year is 4,218,000 tons.

WAR DEPARTMENT EXHIBIT AT THE ST. LOUIS FAIR.

BY THE ST. LOUIS CORRESPONDENT OF THE SCIENTIFIC AMERICAN.

The character of the displays which have been made by the United States government at previous expositions led the public to expect that the government exhibit at the present World's Fair at St. Louis would be exceptionally fine. The truly magnificent building of the government, with the very fine collection of exhibits within the building and surrounding it, have amply justified the expectation. Of the many departments that are represented, each in its own section of the building, perhaps the most popular and certainly the most striking is that shown by the War Department; and of the various elements of its display, the most attractive is the series of reproductions of coast defenses that are arranged around the western end of the main building. Facing the northwestern angle of the building are two emplacements—two reproductions of the actual fortifications—representing two disappearing guns in their emplacements, one a 50-caliber, 6-inch, and the other, illustrated on our front page, a 42-caliber, 12-inch rifle. The 12-inch rifle, which was recently completed at the gun shops, is one of the model of 1900. The gun itself, which weighs 131,500 pounds, cost $43,451 to construct. It is mounted on a Buffington-Crozier disappearing carriage, which embodies the latest improvements of the type. The carriage with its gear weighs 411,826 pounds, and it cost nearly as much as the gun to construct, or $41,000. The gun fires a 1,000-pound shell, with a muzzle velocity of 23,000 feet per second, and it has an extreme theoretical range (which, of course, will never be used in practice) of 18 miles. This type of gun and mount has shown very good results in target practice; as at Fort Greble, R. I., where four shots were fired within five minutes, with four perfect hits. Another gun of the type fired five shots in four minutes and thirty-nine seconds during practice at Fortress Monroe, Va.

This type of disappearing gun carriage has been so fully illustrated in the SCIENTIFIC AMERICAN that no extended description is necessary here. In the front-page engraving the gun is shown in the firing position and, therefore, above the parapet. Normally the gun lies in the depressed position and entirely within the shelter of the parapet, where it is loaded and sighted, the range being telephoned to the gunners from some distant point of observation in which the range finder is concealed. As soon as the gun is ready for firing, it is raised to the firing position by means of heavy counterweights, which are attached to the lower ends of a heavy pair of cast-steel pivoted arms, in the up-

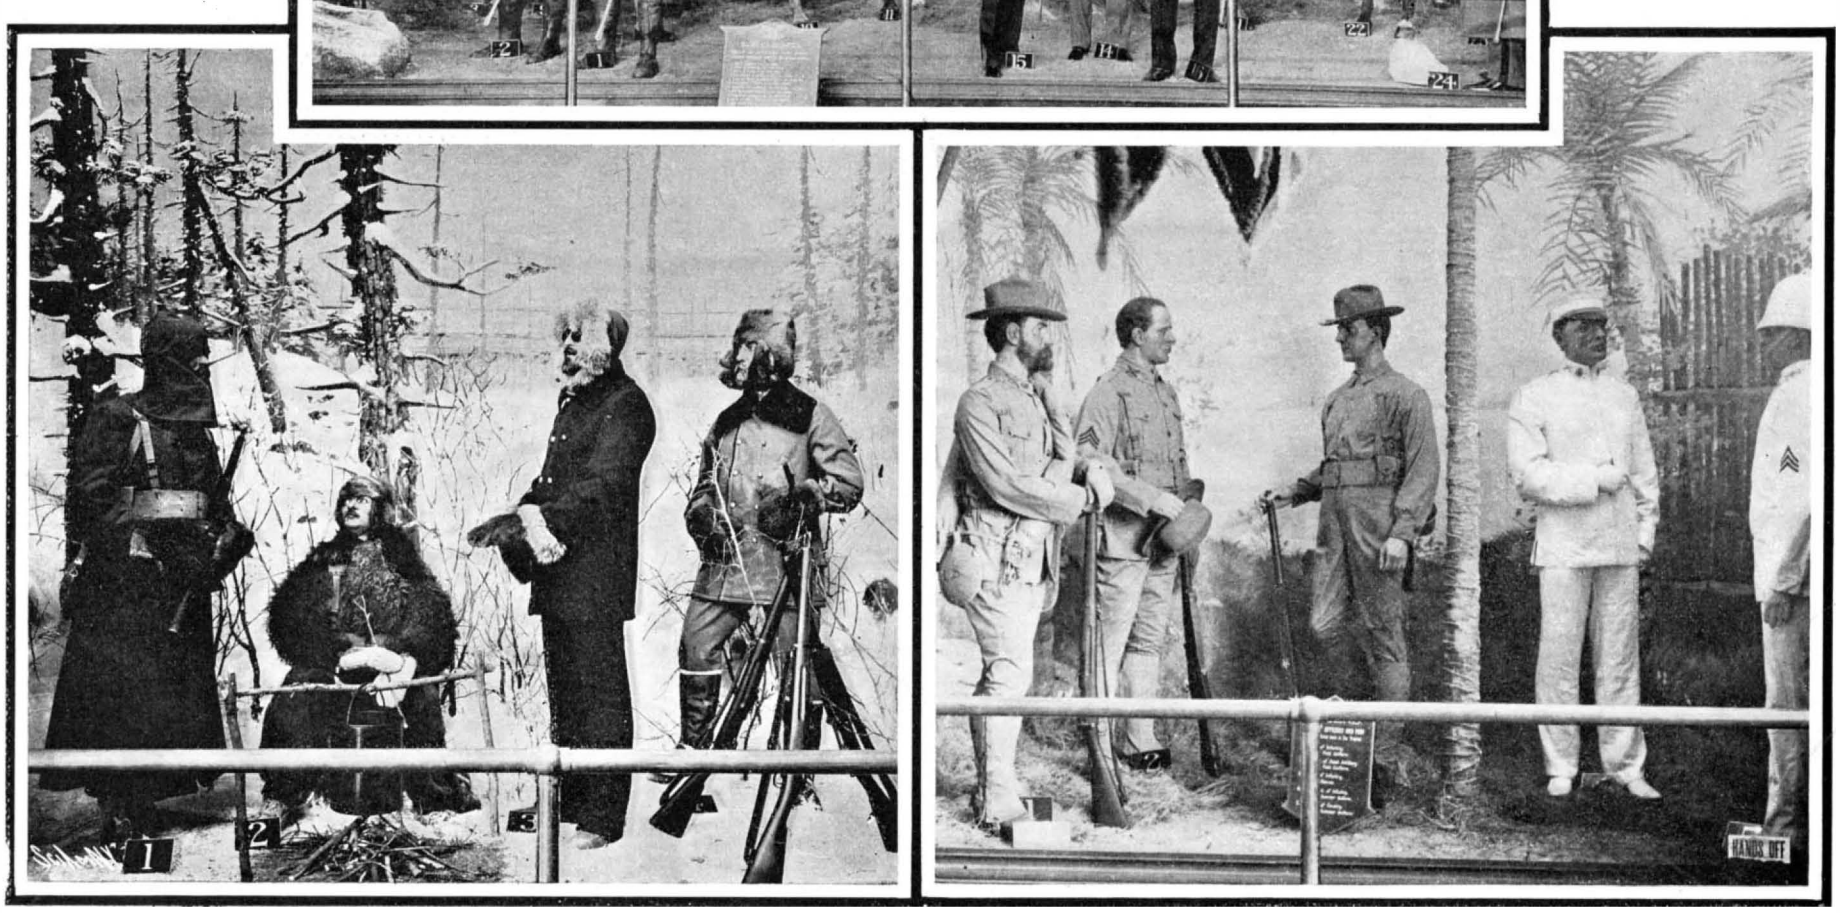

Groups of Thirty-three Lifelike Lay Figures, Showing the Uniforms of Officers and Men of the United States Army. To left and right the lower cuts show the uniforms worn in the Arctics and tropics respectively.

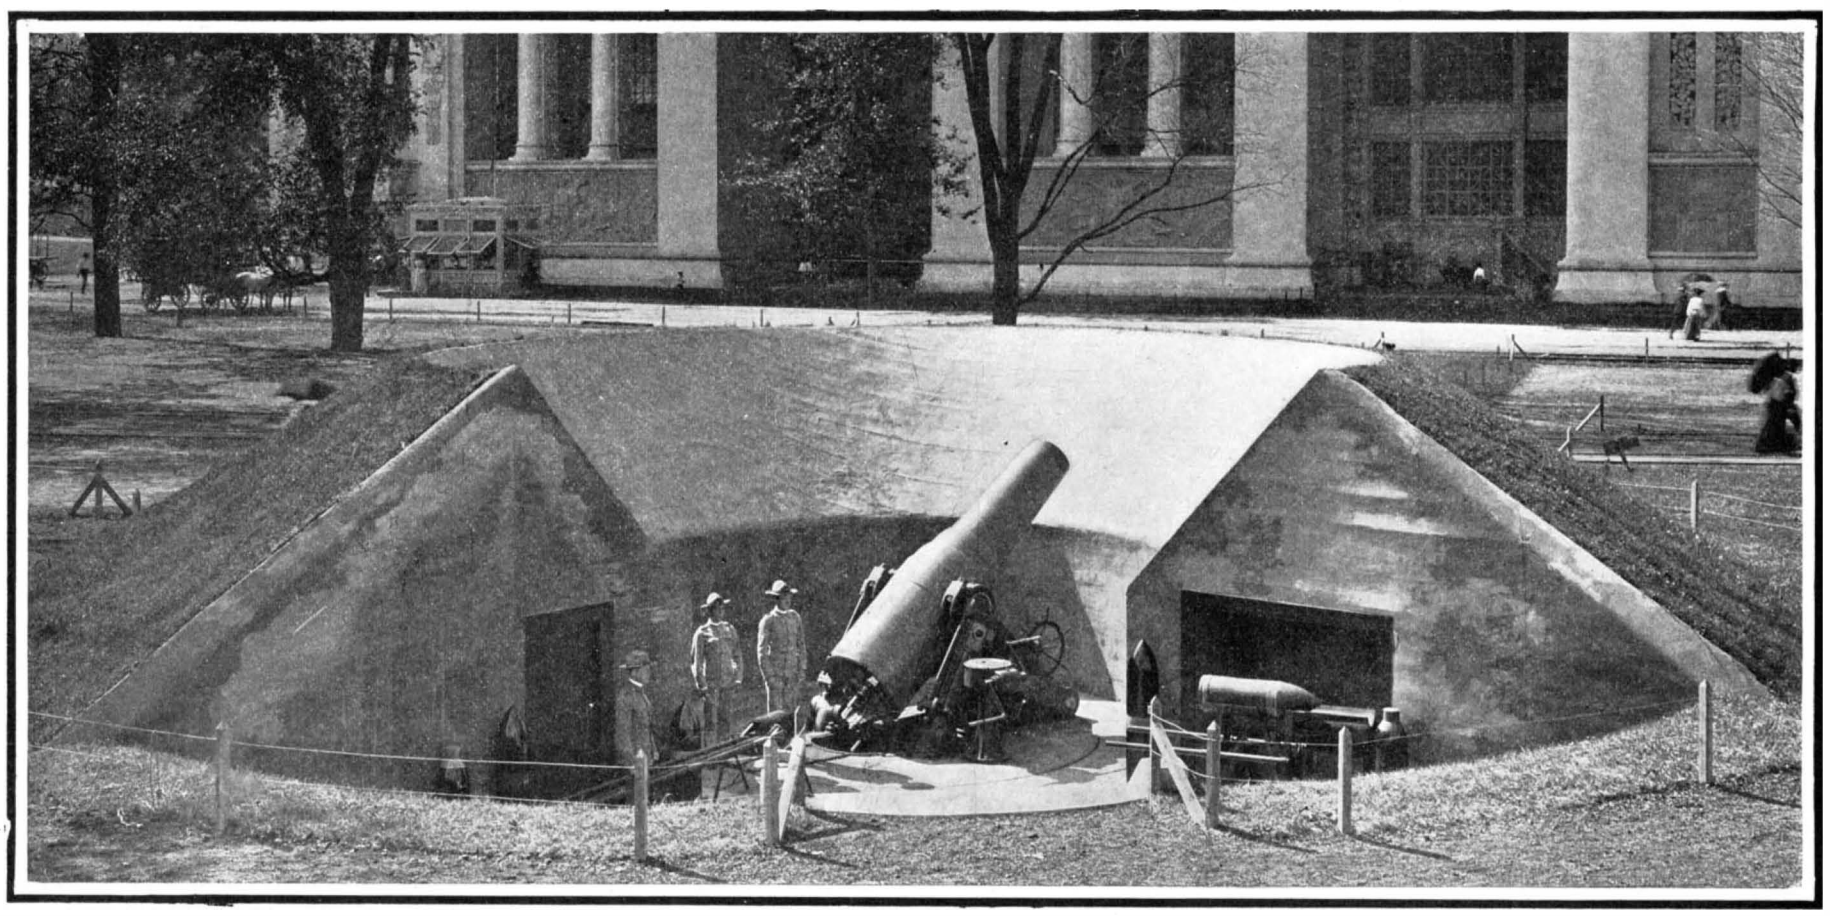

Twelve-inch Spring-Return Seacoast Mortar for High-Angle Fire. Gun has a record of 30 per cent of hits.

Photos taken for the SCIENTIFIC AMERICAN.

UNITED STATES WAR DEPARTMENT EXHIBIT AT ST. LOUIS FAIR.

per end of which rest the trunnions of the gun. When the piece is fired the energy of the recoil is sufficient to throw the gun backward and downward into the loading position. The traversing, elevating, and depressing of the gun are accomplished by means of electric motors, the controllers of which are seen in the bottom left-hand corner of the cut.

In addition to the two disappearing guns above mentioned, the outside exhibit includes a 12-inch breech-loading mortar, mounted in its carriage and shown in a reproduction of a mortar pit. In service this type of gun is used for attacking warships, whether they are at anchor or in motion, at ranges between 3,000 and 12,000 yards. The mortar is entirely hidden in its deep emplacement and being elevated skyward, its shell is thrown several miles into the air and falls, literally "a bolt from the blue" upon the deck of the enemy. Side by side on another platform are a 7-inch breech-loading Howitzer and a 7-inch breech-loading mortar. The Howitzer, which is mounted on its carriage, represents a type of cannon used in siege operations against fortified places; while the field mortar is used exclusively for high-angle fire. On another platform is a 15-pounder, 3-inch rapid-fire gun, mounted on a barbette carriage, the province of this type of gun being to attack the superstructure of ships that may attempt to run past fortifications, and to protect submarine mine fields against the operations of the enemy. Adjoining the 15-pounder is a 6-inch 50-caliber rapid-fire gun, mounted on a pivotal barbette carriage provided with a new type of curved shield, which is finding considerable favor in the army. One of the most interesting features of this outside display of the Ordnance Department is the daily practice with the disappearing guns by detachments of sea-coast artillerymen. The whole process of loading, sighting, and firing the guns is gone through exactly as it would be in war-time operations. The outside exhibit also includes the famous 12-inch Krupp plate which was smashed to pieces in the recent attack upon it by high explosive shells filled with maximite and dunnite.

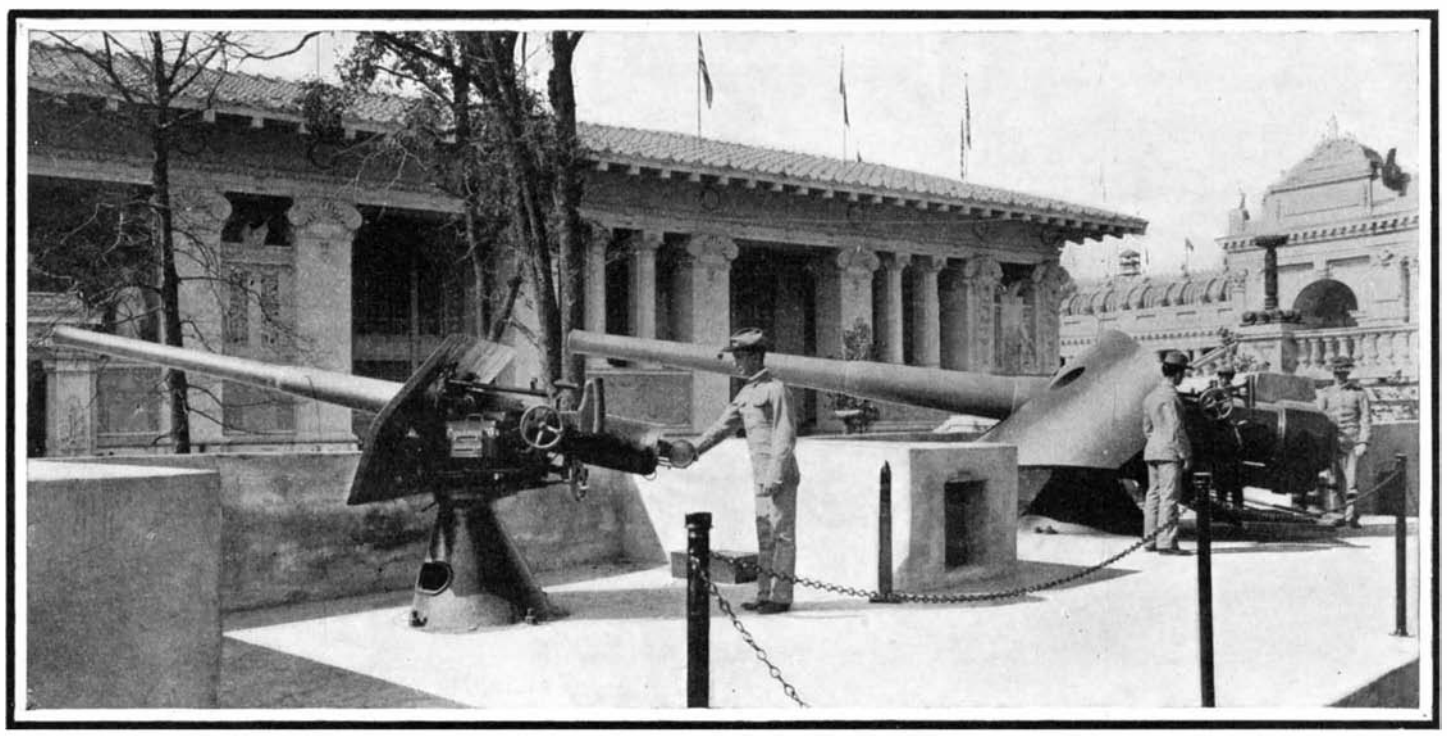

Three-inch 15-pounder Gun to left; 6-inch, 50-caliber Gun, with New Type of Curved Shield, to Right, shown in barbette emplacements. These are the latest patterns of army guns.

The most striking feature of the indoor exhibit of the War Department is an exact model of the great 16-inch coast-defense gun which was tested recently at Sandy Hook. This gun, which weighs 130 tons, throws a 2,400-pound shell with a muzzle velocity of 2,300 feet a second. If it were set up at the Battery and fired with an elevation of 45 degrees, the shell would land at Hastings-on-the-Hudson, 21 miles distance from the Battery. Alongside the gun are arranged samples of the projectiles and powder charges used in the army guns of from 6-inch to 12-inch caliber.

The Quartermaster's contribution to the exhibit is three cases containing full-sized models dressed in the various uniforms worn by the officers and men of the United States Army. The case to the left represents the clothing of furs, skins, etc., worn in the Arctics, the case to the right exhibits the light tropical dress, and the center case, which is the largest and handsomest of the three, shows the various uniforms in use both by mounted and infantry troops. It should be mentioned that these figures are so perfectly modeled and are given such a natural coloring, that at first sight one can easily be deceived into believing that the models are live men instead of lay figures.

The interior exhibit includes a mountain gun and equipment packed for transportation on five lay figures of pack mules, while another of these guns is shown assembled on its carriage ready for firing. A similar exhibit is made of a Colt automatic machine gun. Nearby there are a 3-inch rapid-fire field gun, a Vickers-Maxim automatic gun, and two Gatling guns, all mounted on their respective carriages. A particularly interesting feature is a series of fifteen machines, shown in operation, making ball cartridges for the army rifle. The Springfield armory exhibits, in a very interesting display, the development of portable firearms, from a small iron tube fired from a support by means of a lighted match held in the hand, to the latest pattern of army magazine rifle; while arranged on the wall is a series of pictures illustrating the various stages of the manufacture of the service rifle, the carbine, and the officers' sabre and cadet sword.

Other sections of the War Department are the Medical Department, with its fine exhibit of a brigade field hospital; the Corps of Engineers, with its splendid array of models relating to river and harbor improvements; the Signal Corps, with its exhibit of means for visual signaling; various types of telephones, the telautograph, the typewriting telegraph, the wireless telegraph, etc. The Artillery Corps has built a model tank, that attracts large crowds of the visitors to this building it contains a miniature mine field in which is shown a floating model of the man-of-war. The whole exhibit, which includes a full-sized submarine mine, possesses special interest at the present time, when this type of weapon is demonstrating its terrific powers. Mention should be made also of the West Point exhibit, rich in historic interest, and the very fine exhibits, chiefly by means of relief maps, of the various national military parks.

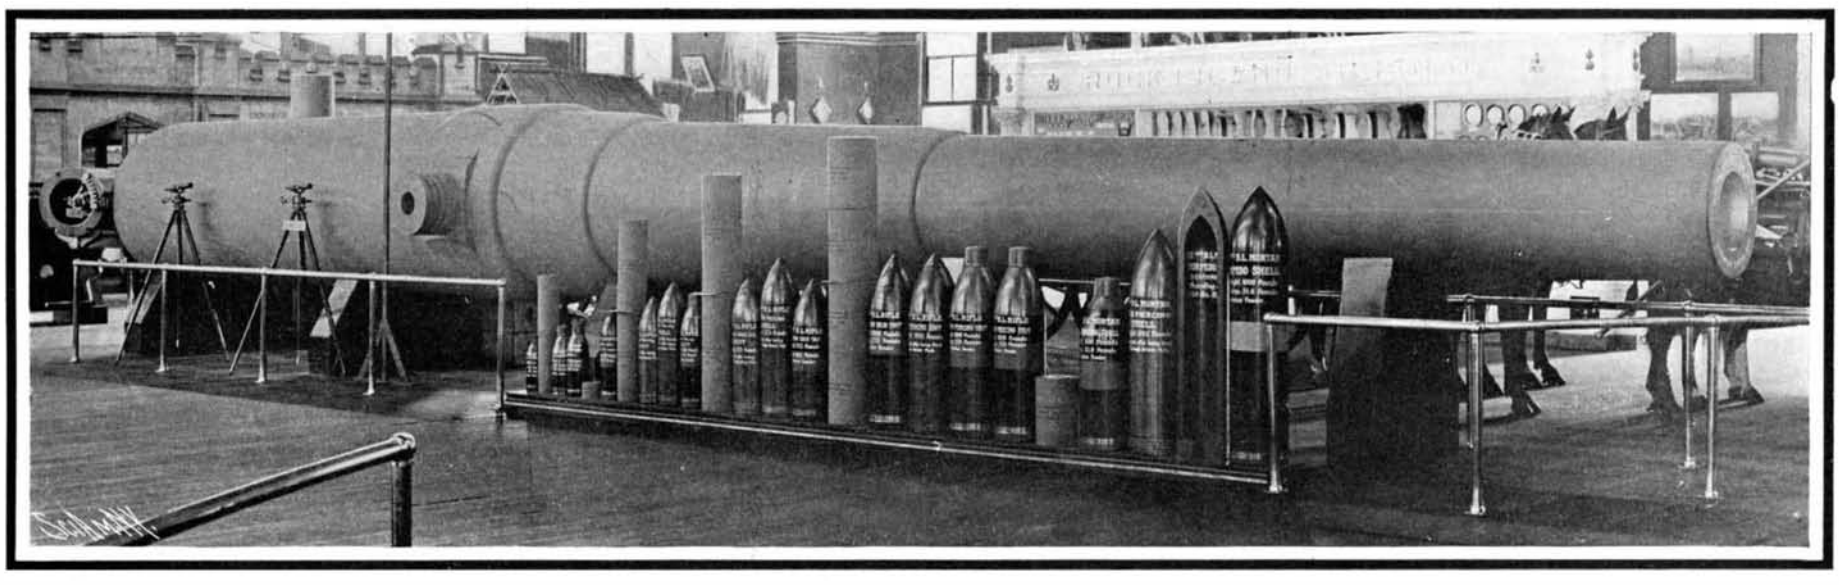

Model of 16-inch Army Gun, with Row of Projectiles and Powder Charges for 6-inch to 12-inch Guns. Weight of 16-inch Gun is 130 Tons; Muzzle Velocity, 23,000 feet per Second, and Maximum Range 21 Miles.

UNITED STATES WAR DEPARTMENT EXHIBIT AT ST. LOUIS FAIR.

An interesting discovery of the remains of a prehistoric animal has been effected near Peterborough (England). While engaged in some excavations at a depth of twenty feet in the Oxford clay, some workmen alighted upon the huge head of a monster of the alligator genus. The jaws were two feet in length, and were firmly clenched together by the pressure of the earth through countless years. The bones, however, were in an excellent state of preservation. The creature has been determined as a member of the Steneosaurus family. Other interesting remains of a similar nature have also been unearthed in the same district.

A paper was read at the last meeting of the Paris Academy of Sciences on "The Action of Terrestrial Magnetism upon a Tube of Nickel Steel (Invar) Intended for Use as a Geodetic Pendulum," by M. G. Lippman. The alloy of nickel and iron known as invar, which possesses a coefficient of expansion only one-twentieth that of brass, has obvious advantages for pendulum observations. This steel, however, is magnetic, and it was thought possible that the disturbing influence introduced in this way might be too large to be neglected. The magnetic moment of a tube of this material was determined, and the possible error on a pendulum observation calculated. It was found to be negligible, and hence invar can be advantageously substituted for brass in the pendulum.

Fifteen electric clocks at Paris take their time from the Observatory; and M. Bigourdan has succeeded with a wireless telegraph station in transmitting the beats correctly to two or three thousandths of a second to telephone receivers with an area of two kilometers radius.

THE DEFEAT OF THE VLADIVOSTOCK SQUADRON.

It must have been with considerable satisfaction that Admiral Kamimura sighted at dawn on the morning of August 14, three of the illusive Vladivostock squadron steaming to the southward in the Strait of Korea; for herein lay his opportunity of forcing the enemy to combat, and proving to the over-zealous and not-too-discriminating Japanese patriots at home, that the Russian squadron was able to carry on its successful raiding of merchant ships only because Kamimura was tied down to the important duty of watching the narrow seas in which he finally intercepted and defeated the enemy.

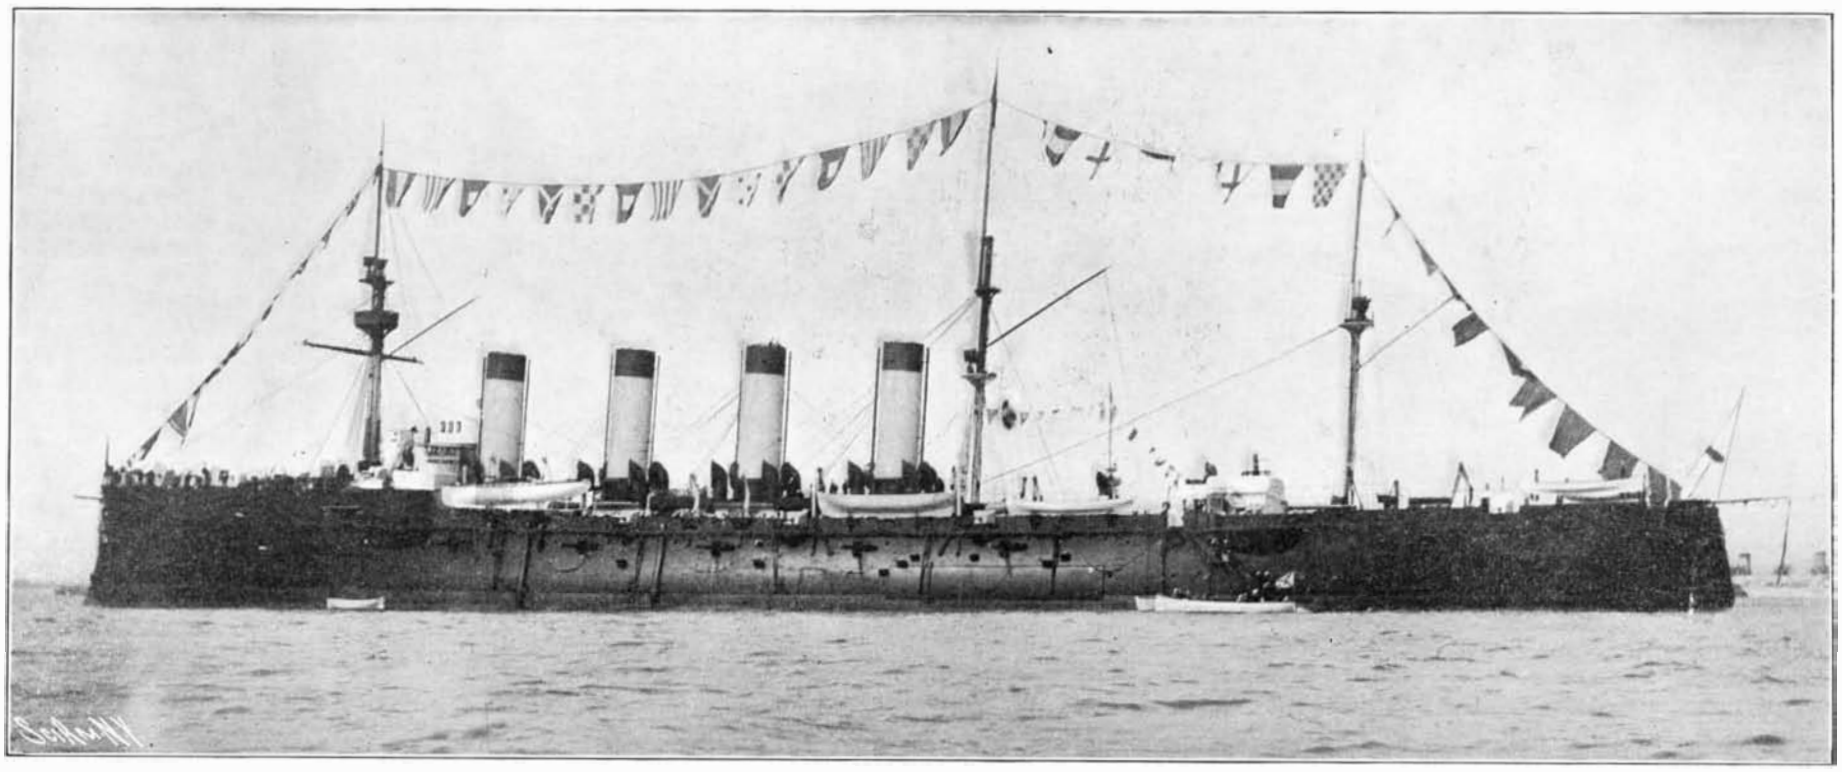

Displacement, 12,500 tons. **Speed,** 20.25 knots. **Coal Supply,** 2,500 tons and liquid fuel. **Armor:** Belt, 10 inches to 5 inches, upper belt, 4 inches, casemates 2 inches, screens, 2 inches. **Armament,** four 8-inch, sixteen 5.5-inch, twelve 3-inch, 36 smaller guns. **Torpedo tubes,** 6 above water. **Complement,** 735.

ARMORED CRUISER "ROSSIA," SEVERELY DAMAGED IN THE KOREA STRAIT ENGAGEMENT.

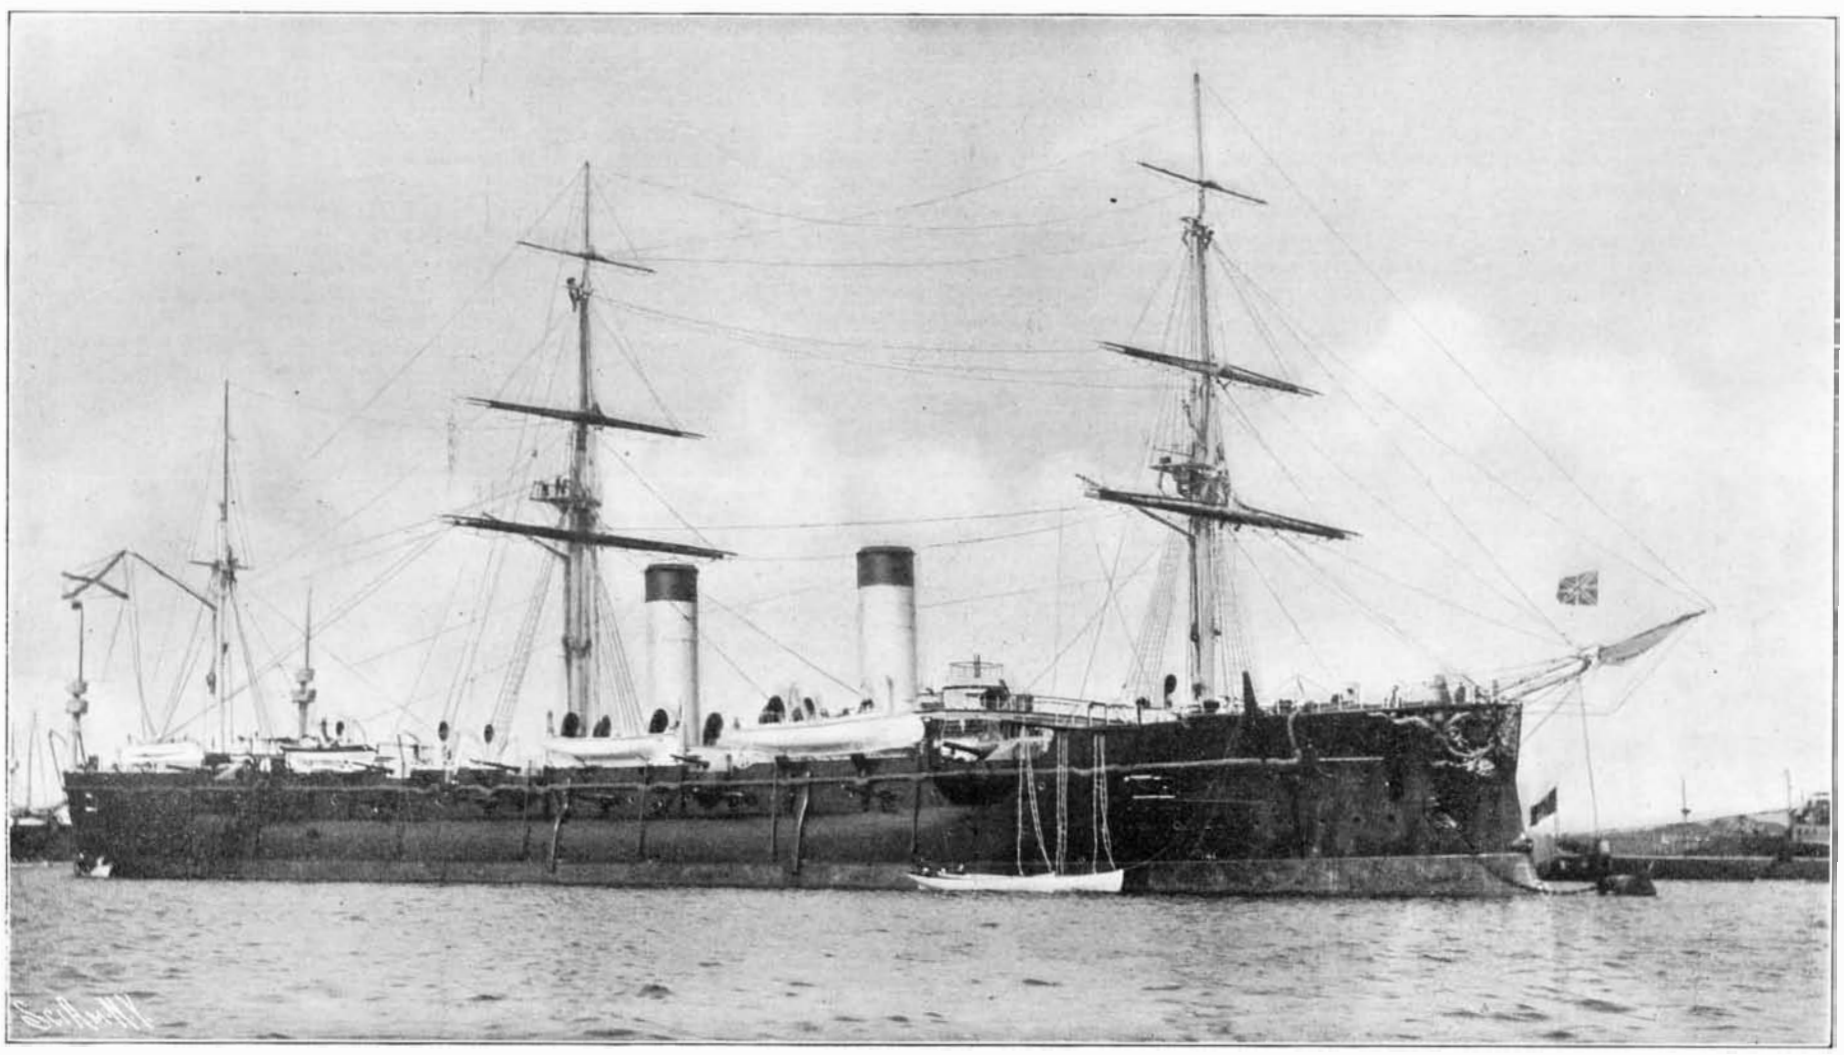

Displacement, 10,950 tons. **Speed,** 18.8 knots. **Coal Supply,** 2,000 tons. **Armor:** Belt, 10 inches to 5 inches; deck, 2¾ inches; sponsons, 2 inches. **Armament:** four 8-inch, sixteen 5.5-inch; six 4.7-inch, 22 small guns. **Torpedo tubes,** 6 above water. **Complement,** 727.

RUSSIAN ARMORED CRUISER "RURIK," SUNK IN THE KOREA STRAIT ENGAGEMENT.

The Russian squadron was composed of three large armored cruisers, of which the oldest, the "Rurik," of about 11,000 tons displacement, was notable as having been the progenitor of the big, powerful, and fast armored cruisers which have become so popular in the present day. The "Rurik," built in 1892, must be called an old vessel; for her guns were of short caliber and low velocities; her speed, originally between 18 and 19 knots, had dropped to 15 knots or under (for not being wood-sheathed and coppered she naturally fouled rather quickly); her armor belt extended only a part of her length, and her armor, although 10 inches thick at the water line, was of inferior quality compared to the splendid material with which all modern ships are protected. The other two armored cruisers were greatly superior to her. The "Rossia," built in 1896, is a vessel of 12,500 tons and about 20 knots speed, and she has the great advantage of being sheathed and coppered. Her main armament consists of four 8-inch guns of modern pattern, but her secondary armament, consisting of sixteen 5.5-inch guns, is altogether too light according to modern ideas, being effective only at close ranges. Her protection is good, consisting of a belt extending over the greater part of the water-line, and composed of Harvey steel of a maximum thickness of 10 inches. The "Gromoboi," built in 1899, is a vessel of about the same tonnage, also sheathed and coppered, and having about the same speed, 20 knots an hour, as the "Rossia." Her main armament consists of four 8-inch or possibly 8.4-inch guns, and is greatly superior to that of the "Rossia" because of the fact that her secondary battery is made up of sixteen 6-inch guns, 45 calibers in length, which were available for effective work of much greater ranges than the rapid-fire guns of the other two cruisers. All three ships were distinguished by their very numerous batteries, no other vessels in the world being so loaded with guns. Indeed, as the event has proved, they would have been far more effective ships had they carried fewer guns of greater weight and power.

Opposed to the Russians was a homogeneous fleet of four modern armored cruisers of practically the same size, speed, and armament. Three of them, the "Idzumo," "Iwate," and "Tokiwa," of about 9,800 tons displacement and 22 knots speed under forced draft, were built by Armstrong and carried guns of his make. The main armament consisted, in each case, of four 8-inch and fourteen 6-inch guns, and the vessels were protected with 7-inch Harvey nickel belts, with 6 inches of casemate protection for the guns. The fourth vessel of the squadron was the "Azuma," built at St. Nazaire, France. She is of 9,436 tons displacement, 21 knots speed and carries four 8-inch and twelve 6-inch guns as her main armament. Her belt is of Krupp steel, and she has 6 inches of Harvey nickel-steel protection for her guns.

It should be mentioned that whereas the Japanese cruisers carried their armament in turrets or within

casemates, the Russian cruisers carried but few of their guns in casemates, most of the pieces depending upon gun shields for protection. The Japanese, in this fight as in that off Port Arthur a few days before, elected to make the conflict a battle between gunners. They appear to have remained at long range (though the reports of the Japanese and Russian admirals do not agree on this point), and trusted to their superior pieces and better gunnery to disable the enemy at the cost of a minimum amount of damage to themselves. This was obviously the proper course for the Japanese. Such fighting would have to be done mainly by the 8-inch and 6-inch guns, and of the 8-inch Russia possessed but twelve guns against sixteen carried by the Japanese; moreover four of those twelve were the short 30-caliber pieces of the "Rurik," whose velocity and range were very limited. Hence, in the earlier stages of the fight, the Japanese must have been able to reach the Russian ships with about twice the number of 8-inch pieces that the Russians could hope to make effective upon the Japanese ships. In the 6-inch pieces, the Japanese had a tremendous superiority, carrying fifty-four against the sixteen mounted by the "Gromoboi." The "Rossia" and the "Rurik," it is true, mounted sixteen 5.5-inch guns apiece; but the one-half inch drop in caliber means a big drop in striking energy and carrying power, and it is doubtful if the 5.5-inch guns were able to do much effective work in this long-range fight.

It is a question as to which squadron had the advantage in the matter of speed. For although the Japanese ships were credited with from 21 to 22 knots trial speed, they were not sheathed, and for some months they have been tied closely to the task of watching the Straits to prevent a junction of the Port Arthur and Vladivostock squadrons; hence their bottoms were probably very foul, and their speed not much better than that of the "Rurik," or, say, about 15 knots an hour. The immense advantage of sheathing and coppering was shown at the close of the fight, when the "Gromoboi" and "Rossia," which should have been captured or sunk by the victorious Japanese, were able to draw away and make good their escape to Vladivostock.

There is no new lesson taught by the fight. We simply see the accepted theories of construction and tactics once more strongly verified. That the speed of the fleet is governed by the speed of the slowest ships was proved by the fact that the slower "Rurik" dropped behind and became the target for a terrific concentrated fire from the four Japanese cruisers; and although the two faster Russian ships repeatedly returned to her assistance, they were themselves so hard hit in doing this that they were forced to leave the "Rurik" to her fate. The superior armor carried by the newer Russian ships showed its value in protecting the water line from vital injury. The softer and less extensive water-line belt of the "Rurik" presented a weak point which the Japanese were quick to take advantage of. She was evidently so badly hulled that her ultimate sinking was only a question of time.

The two sheathed cruisers which escaped to Vladivostock present an interesting problem for the Japanese to solve. With their copper bottoms and with the large Vladivostock drydock available for cleaning, unless their engines have been seriously disabled, they can prey upon commerce without any fear of being captured for many months to come. For it is doubtful if there are any Japanese ships that can be put into condition to match them in speed. There can be little doubt that the experience of these ships will go far to enhance the value of the copper bottom in future warship construction.

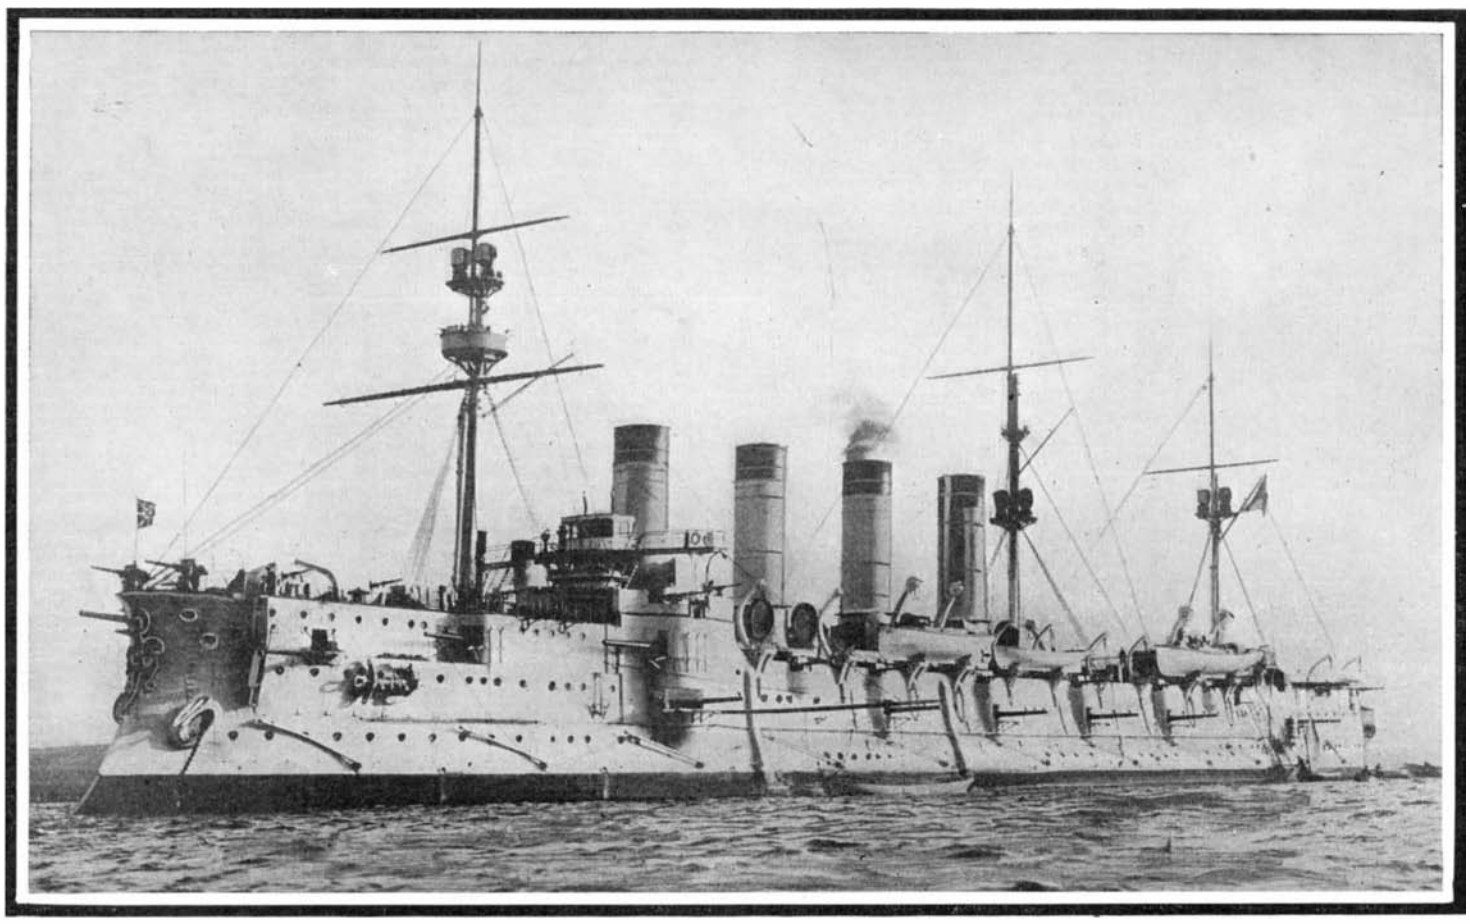

Displacement, 12,367 tons. **Speed,** 20 knots. **Coal Supply,** 2,500 tons and liquid fuel. **Armor,** belt, 6-inch; deck, 2-inch; secondary belt. 4-inch; casemates, 6-inch. **Armament,** four 8-inch; sixteen 6-inch; twenty 3-inch; twenty-four small guns. **Torpedo Tubes,** four. **Complement,** 800.

ARMORED CRUISER "GROMOBOI," SEVERELY DAMAGED IN KOREA STRAIT ENGAGEMENT.

THE NEW BALDWIN AIRSHIP.

BY J. MAYNE BALTIMORE.

Capt. T. S. Baldwin, of Oakland, Cal., is the recent inventor and constructor of what proves to be a very successful dirigible airship.

The first and initial trial of the craft was made from Idora Park, Oakland. Since then several other trials have been made, all of which proved very satisfactory.

No high altitude was attained by the new airship. Capt. Baldwin's principal aim was to determine if the movements of his ship could be controlled. He ascertained that this could be done quite easily.

At a height of about 700 feet, he circled several times clear around the large park, going both against and with the wind, and moving at various angles. After being up nearly an hour, Capt. Baldwin brought his ship back to the starting point, and safely descended to earth. These trials were witnessed by great crowds of spectators.

Subsequent trials have also been made, when it was demonstrated that in every revolution of the large propeller, and in every move of the steering gear, and of the weights which raise or lower the vessel at will, the plans of the inventor have been carried into effect. The large propeller, having two metallic blades, and nearly 6 feet in diameter, instead of being placed at the stern, is located at the bow of the frame or car, as in most recent airships of this type. In this manner the airship, instead of being pushed through the air, is pulled. This facilitates the steering as well as raising or lowering the ship.

The balloon, by means of which the whole machine is raised, is somewhat blunt cigar-shaped. It measures 54 feet in length and is 17 feet in diameter in the middle. The balloon is constructed of a very fine quality of silk, extremely strong and flexible, and with the reticulated netting which attaches it to the car, weighs only 90 pounds. The balloon is inflated with hydrogen gas, and at an ordinary distension pressure contains 8,000 cubic feet.

To this balloon is attached the frame which supports the propelling and steering mechanism. This frame, which is made of

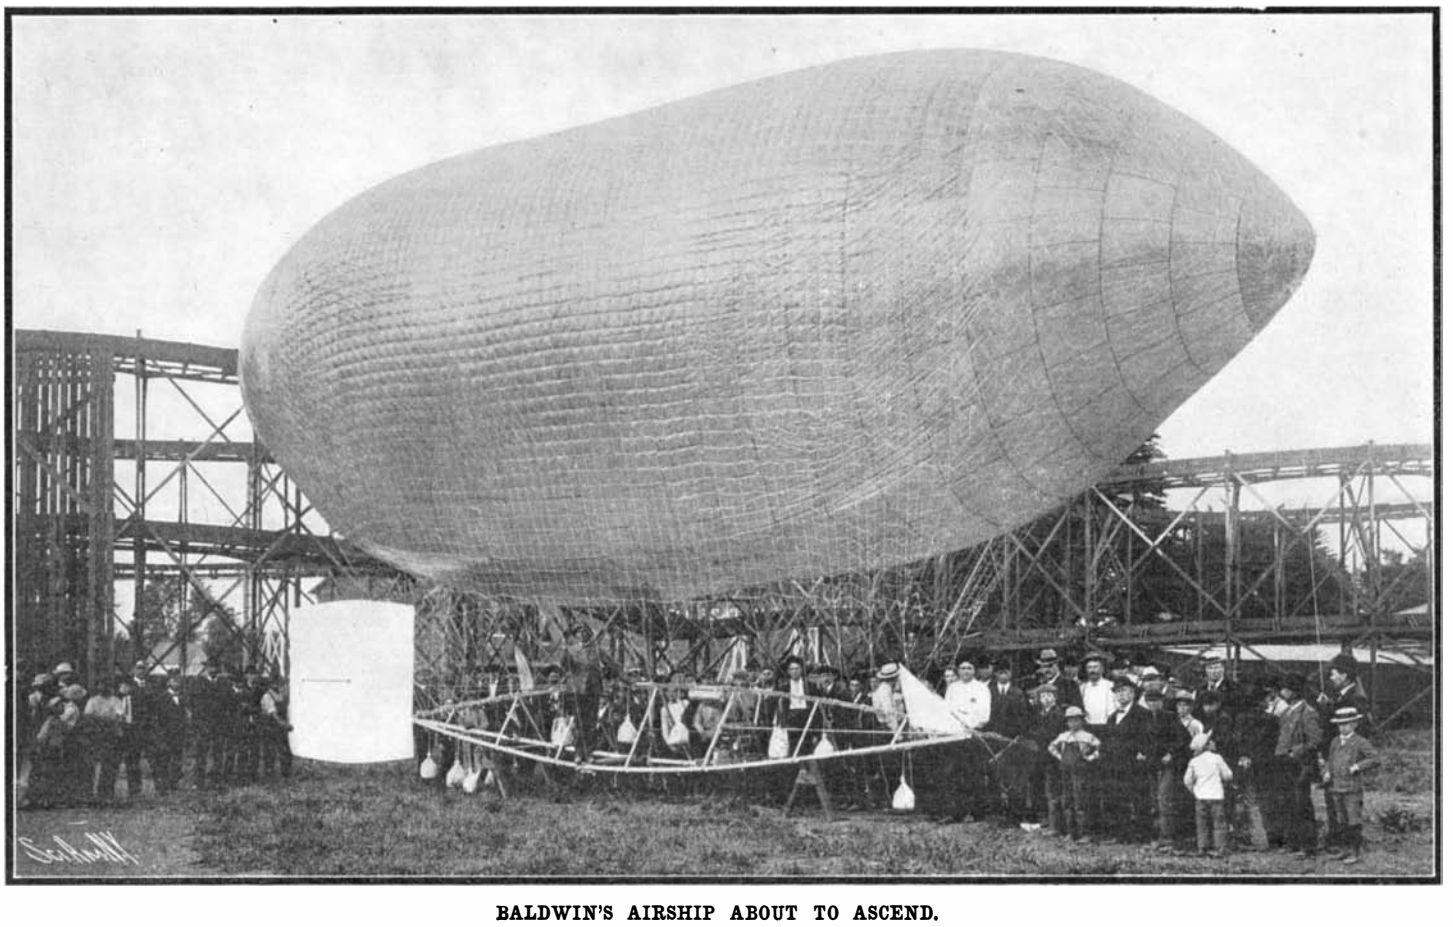

BALDWIN'S AIRSHIP ABOUT TO ASCEND.

strong, light wood, is triangular in shape, the three ends uniting at a center at each extreme. This frame is 48 feet long, and is very securely braced and lashed. It has been thoroughly tested and will support 1,400 pounds with safety.

The engine which drives the propeller is one of the ordinary gasoline type, furnishes 7 horse-power, and weighs 60 pounds. The transmitting mechanism is so adjusted and geared as to cause the propeller to make 150 revolutions per minute. Just what speed can be obtained under ordinary conditions, has not yet been definitely determined by the inventor.

The frame, or car, is placed directly below the balloon—about 12 feet—and weighs 65 pounds. The total weight of the airship is 220 pounds, while its buoyancy will lift nearly 500 pounds. The rudder, which is rectangular in shape, 5 x 3½ feet, is very easily manipulated from any part of the car; and the engine is regulated by a steel lever. One person can very easily navigate this airship. The aeronaut can sit about midway of the frame, or he may move about freely if necessary without disturbing the general equilibrium to any extent.

A weight, which can be shifted from bow to stern, or *vice-versa*, permits the airship to be raised or lowered at will, a feature borrowed from Zeppelin's craft. Capt. Baldwin intends soon to construct another frame that will be 6 feet longer and 15 pounds lighter. He thinks it will increase the speed and facilitate the steering.

So confident is the inventor and builder of success that he has already entered his airship in the $1,000,000 prize competition at the World's Fair. Capt. Baldwin expects to start soon for St. Louis with his aerial machine.

In working the ship, the propeller may be reversed at pleasure, thus pushing the vessel backward, whenever the same is necessary or desirable. The trials showed that the ship very readily obeyed her helm.

RECENTLY PATENTED INVENTIONS.

Electrical Devices.

THIRD-RAIL SYSTEM.—T. JENKINS, New York, N. Y. In this case the invention relates to the third-rail system for the propelling of cars, its principal objects being to furnish an effective protecting-cover for the rail and a convenient support for the contact-shoe which will permit the shoe to be moved into and out of the cover and coaction with the rail.

ELECTRIC TROLLEY.—G. ONDO, Delancey, Pa. The invention has reference more especially to what are technically known as "trolley-finders," and one of the principal objects thereof is to overcome numerous disadvantages and objections common to many other structures hitherto devised for a similar purpose. The means employed guide the device to assume the proper relation with the conductor and retained in such relation and the same separated entirely from the conductor when desired.

Machines and Mechanical Devices.

FRICTION-CLUTCH.—C. SEYMOUR, Defiance, Ohio. The object of the invention is to provide a new and improved clutch arranged to hold a movable part under ordinary conditions in position, to allow a limited yielding movement of the said part when under an ordinary strain, and to permit the parts to move any desired distance when under an excessive strain. It is a division of the application for Letters Patent of the United States for a band-saw, formerly filed by Mr. Seymour.

Prime Movers and Their Accessories

WINDMILL.—J. J. MCLEAN, Moose Jaw, Canada. In this patent the invention has for its object to render the construction of windmills more simple, durable, economic, and effective than ordinarily and to provide a means whereby when the windmill is not in use the wind-wheel will be housed and perfectly protected and whereby more or less wind may be directed to the wheel as occasion may require. Means are provided, acting always to keep the blades perfectly facing the wind, which blades are a fixture in the construction of the wind-wheel.

FUSIBLE-PLUG VALVE.—J. L. DOWNS, North Bergen, N. J. Mr. Downs' purpose is to provide a means whereby in the event the water in a boiler should become so low that the heat from the fire-box melts the fusible plug in the crown-sheet a valve may be quickly brought into action to close the receiver for the plug, and thus prevent steam from entering the box and extinguishing the fire, and also enabling the fire under such conditions to be properly attended to or drawn or banked without undue peril to the stoker or fireman.

Railways and Their Accessories.

HAND-STRAP FOR CARS.—J. S. PAXTON, New York, N. Y. The purpose of the invention is to provide a strap for cars having a panel in which an advertisement may be inserted and removed at will, which advertisement may be made to appear upon one or both sides of the panel. Another is to provide a frame for the panel, into which the panel may be readily introduced or from which it may be quickly removed, and also to provide a strap in two sections, upper and lower, the upper having a swivel connection with the frame of the panel and the lower a flexible connection with the frame.

Designs.

DESIGNS FOR A STOVE.—J. P. OUERBACKER, Louisville, Ky. The design in this patent is a stove ornamented throughout its side by an attractive scroll work which gives a pleasing ornamental effect and provides a graceful and artistic panel in the middle of the oven door which may be utilized for any desired purpose.

NOTE.—Copies of any of these patents will be furnished by Munn & Co. for ten cents each. Please state the name of the patentee, title of the invention, and date of this paper.

Business and Personal Wants.

READ THIS COLUMN CAREFULLY.—You will find inquiries for certain classes of articles numbered in consecutive order. If you manufacture these goods write us at once and we will send you the name and address of the party desiring the information. **In every case it is necessary to give the number of the inquiry.**

MUNN & CO.

Marine Iron Works. Chicago. Catalogue free.

Inquiry No. 5897.—For manufacturers of parts for gasoline engines.

AUTOS.—Duryea Power Co., Reading, Pa.

Inquiry No. 5898.—For the manufacturers and the British agent for the "Bliss" log.

"U. S." Metal Polish. Indianapolis. Samples free.

Inquiry No. 5899.—For puzzles for advertising purposes.

Perforated Metals, Harrington & King Perforating Co., Chicago.

Inquiry No. 5900.—For makers of steam or hot water heating apparatus for greenhouses.

Handle & Spoke Mchy. Ober Mfg. Co., 10 Bell St., Chagrin Falls, O.

Inquiry No. 5901.—For machines for weaving straw hats.

If it is a paper tube we can supply it. Textile Tube Company, Fall River, Mass.

Inquiry No. 5902.—For a captive balloon to raise 6 persons 300 feet high.

Sawmill machinery and outfits manufactured by the Lane Mfg. Co., Box 13, Montpelier, Vt.

Inquiry No. 5903.—For manufacturers of spring motors.

American inventions negotiated in Europe. Wenzel & Hamburger, Equitable Building, Berlin, Germany.

Inquiry No. 5904.—For makers of gas stoves and gas heaters.

Patent No. 658,853, "Safety Device for Elevators" for sale. Address H. S., 265 Orange Street, New Haven, Conn.

Inquiry No. 5905.—For parties to turn out a new form of gasoline mantle burner in large quantities.

In buying or selling patents money may be saved and time gained by writing Chas. A. Scott, 340 Cutler Building, Rochester, New York.

Inquiry No. 5906.—For machines for planting young onions.

The celebrated "Hornsby-Akroyd" Patent Safety Oil Engine is built by the De La Vergne Machine Company Foot of East 138th Street, New York.

Inquiry No. 5907.—For makers of tool handles and small articles of walnut.

Patented inventions of brass, bronze, composition or aluminum construction placed on market. Write to American Brass Foundry Co., Hyde Park, Mass.

Inquiry No. 5908.—For makers of lathes between jewelers' and foot lathes.

We manufacture anything in metal. Patented articles, metal stamping, dies, screw mach. work, etc., Metal Novelty Works, 43 Canal Street, Chicago.

Inquiry No. 5909.—For makers of high-speed steam engine castings to generate 12 to 16 candle power.

Manufacturers of patent articles, dies, metal stamping, screw machine work, hardware specialties, machinery and tools. Quadriga Manufacturing Company, 18 South Canal Street, Chicago.

Inquiry No. 5910.—For makers of laundry machinery.

Inquiry No. 5911.—For makers of gage rods, hydrometer jars, etc.

Inquiry No. 5912.—For makers of carpet-cleaning machinery.

Inquiry No. 5913.—For machines for making old carpets into rugs.

Inquiry No. 5914.—For machinery for making apple jelly, etc.

Inquiry No. 5915.—For makers of power lace machines.

Inquiry No. 5916.—For makers of machine for making copra, or for taking meat from the cocoanut.

Inquiry No. 5917.—For manufacturers of wood-carving machinery.

Inquiry No. 5918.—For makers of flywheels for engines of 20 to 50 h. p.

Inquiry No. 5919.—For makers of pins, hair pins, combs, hooks-and-eyes, etc.

Inquiry No. 5920.—For makers of furnaces for smelting lead, tin and Babbitt dross.

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(9445) R. G. P. asks: Could two sets of storage batteries be put into a vehicle so that one set will be running the vehicle and the other will be charged by the same vehicle; and how fast has a dynamo got to run to make electricity? A. If a storage battery is doing the work of running a vehicle it will not have any power left with which to charge another battery strong enough to run the same vehicle. It would not be economical to use a storage battery for the purpose of charging another storage battery. There is always a percentage of loss in transforming electricity from one form to another. A dynamo may be built to run at various speeds up to several thousand turns per minute.

(9446) LeG. L. W. asks: I am in want of information how to make small spark or induction coils, etc. Where may I find same? A. You will find in our SUPPLEMENT No. 160, which we send for ten cents, full instructions with all needed illustrations and drawings for making an induction coil which may give a spark from 1 inch to 1½ inches in length. SUPPLEMENT No. 1124, price ten cents, treats in a similar way a coil giving a spark 6 inches long. In Norrie's "Induction Coils," price $1, you will find details of coils giving sparks from ½ inch to 12 inches in length. Among these you can surely find what you want. We shall be pleased to receive your order for the books you wish.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending August 16, 1904

AND EACH BEARING THAT DATE

[See note at end of list about copies of these patents.]

Adding machine, W. H. Pike, Jr. 767,596
Adding machine, R. Corbin 767,871
Air and bisulfid of carbon contained in viscose, apparatus for extracting, L. Naudin 767,421
Air brake, W. M. Fulton 767,476
Air brake strainer attachment, automatic, S. J. Ballance et al. 767,859
Altiscopes, etc., means for clearing the optical parts of, Bedell & Bailey 767,624
Apparel, wearing, M. A. J. Driscoll 767,803
Automobile brake, C. M. Rhodes 767,959
Awnings, means for operating roller, L. Clark 767,389
Axle box, railway car, F. W. Chase 767,797
Baby walker, C. H. Stoyer 767,774
Bag or sack holder, R. Ross 768,018
Bags, etc., machine for settling material in, W. E. Nickerson 767,590
Baling machine, straw, H. Sauler 767,769
Baling press, W. R. Colman 767,631
Barrel head fastener, D. E. Richards 767,715
Bath tub water regulating device, S. E. Robinson 767,662
Bearing, centrifugal machine elastic collar, T. W. Morgan 767,524
Bed bottom support, T. Klipfel 767,700
Bedstead, J. J. Robinson 767,501
Bedstead construction, metallic, B. C. Barton 767,680
Bed screen, A. L. Gillis 767,882
Belt fastener, J. C. Conn 767,473
Belt shifting device, J. Weichart 767,616
Belt, waist, W. Hartung 768,941
Billiard cloth, compound, M. Bensinger 767,922
Billiard or like cues, mounting tips upon, L. P. C. Hodson 767,887
Binder, loose leaf, H. Tentschert 767,670
Blade holder, O. Kampfe 767,695
Bleaching and dyeing apparatus, A. Holle 767,563
Block composition, A. W. Perkins 767,435
Block making machine, hollow, W. R. Cunningham 767,737
Block mold, J. C. Miller 767,418
Block signal, C. H. Morse 767,952
Bobbin for twisting and drying yarns, G. Poure 767,438
Boiler end plate, G. Y. Bonus 768,011
Boiler flue cleaner, P. F. Vogt 767,854
Bolt actuator, W. F. Gilbert 767,400
Book, loose leaf, F. Grimme 767,940
Book, manifolding sales, P. L. Cozzens 767,927
Bottle, W. Johnston 767,819
Bottle, non refillable, E. M. Ussery 767,455
Bottle, non refillable, A. W. Swanberg 767,530
Bottle stopper, E. D. Conklin 767,632
Bottle stopper, E. J. Deegan 767,929
Bottle stopper, G. Koch 767,947
Box, F. S. Foote 767,879
Box fastener, F. M. Holmes 767,482
Box fastening, W. H. Davis 767,547
Braiding machine, J. D. Bishop 767,376
Brazing furnace, hydrocarbon, C. F. Warner 767,509
Brick kiln, J. Elcock 767,637
Bricks, cleaning, F. D. Le Blanc 767,575
Briquet machine, J. J. Crawford 767,544
Bromid enlargment making device, T. J. Lande 767,571
Brush, air, O. C. Wold 767,510
Brush and dentrifice receptacle, combined tooth, Ziegler & Slater 767,469
Buggy boot, J. W. Covert 767,735
Buggy seat brace, T. D. Clendining 767,390
Building block, J. A. Noble 767,494
Burglar alarm, J. Wheeler 767,786
Burnishing machine, E. McDonald 767,653
Button, F. R. White 767,461
Button, cuff, D. Nideroest 767,826
Button, tufting, H. Higgin 767,885
Buttonhole cutting and stitching machine, E. B. Allen 767,539
Buttonhole cutting and stitching machine work clamp, E. B. Allen 767,540
Cabinet, kitchen, C. E. Sullivan 767,669
Cabinet, kitchen, F. Miller 767,908
Cable carrier knocker, P. A. Myers 767,488
Cable traction system, G. W. Sanders 767,837
Calculating machine, W. F. Yaxley 767,468
Can opener, W. R. Holder 767,755
Candle extinguisher, C. B. Isakson 767,892
Candy feeding machine, H. S. Gordon 767,936
Cane, torpedo, P. R. Roberts 767,440
Canopy, M. J. Dwyer 767,513
Car coupling, G. H. Schaffer 767,770
Car door, freight, E. T. Hanson 767,404
Car, dump, S. Otis 767,657
Car fender, W. E. Zachry 767,538
Car heating system attachment, E. H. Gold 768,020
Car lubricating side bearing, G. Galloway. 767,745
Car, railway, F. S. Ingoldsby 767,693
Car, sleeping, P. Synnestvedt 767,507
Car unloading device, W. F. Traves 768,006
Car vestibule curtains, catch device for, J. G. Barry 767,623
Car vestibule, etc., diaphragm, Donaldson & Schroyer 767,802
Carbonator controller, automatic, E. E. Murphy 767,419
Carbureter, F. C. Merrege 767,485
Carbureter, G. M. Ritchie 767,716
Carding machine stop mechanism, J. W. Scott 767,965
Carpet renovator, M. H. Collom 767,630
Carrier bar, adjustable, A. E. Brown 767,861
Carrier knocker, traveling, D. M. Motherwell 767,652
Carton, etc., setting up machine, W. S. Scales 767,445
Cartons, etc., machine for setting up and filling, W. H. Doble 767,395
Cartridge, C. Kurth 767,570
Case or satchel, E. A. Lamphier 767,898
Celluloid, I. Kitsee 767,646
Cellulose, dissolving nitrated, I. Kitsee, 767,943, 767,944
Cellulose, production of amorphous, I. Kitsee 767,822
Checking apparatus, sales, R. B. Stanley 767,719
Chuck, lathe, C. W. Barnaby 767,678
Chute, coal, F. J. Underwood 767,853
Cigar wrapper cutter and rolling table, combined, J. R. Williams 767,620
Cigarette making device, A. E. Buckingham 767,626
Clock, musical alarm, A. Stange 767,605
Cloth cutter, G. P. Eastman 767,552
Clothes pin, H. S. Broughton 767,792
Clothes pin blank forming machine, A. Smith 767,448
Clothes pin slotting machine, A. Smith 767,447
Clutch, friction, W. A. Smith 767,844
Cock, ball, G. E. Stillman 767,848
Coffee drier, E. Penagos 767,594
Coffee pot, R. L. Vansant 767,778
Coffee pot percolating and circulating attachment, C. B. Pike 767,595
Coloring matter and producing same, G. J. Kaufmann 767,894
Combustion regulating means, J. M. W. Kitchen 767,569
Concrete construction binder, H. L. Lewman 767,582
Condenser, C. Caille 767,384
Condenser apparatus, D. M. Livingston 767,905
Connecting rod, C. M. Spalding 767,772
Conveyer, portable, W. L. McCabe 767,824
Cooker, U. Abderhalden 767,622
Copy holder, A. R. Dearborn 767,873
Core element, R. G. James 767,409
Core elements, producing, R. G. James 767,410
Corn husker, R. N. Thomas 767,918
Corn shock compressors, cord carrying mechanism for, J. W. Webster 767,457
Cornet triple tongue attachment, J. G. Schlenter 767,446
Corset, M. L. Large 767,572
Corset, apparel, D. Kops 767,415
Corset attachment, M. H. Gerstle 767,881
Cotton openers, etc., evener mechanism for, W. J. Hall 767,750
Cotton picker, pneumatic, J. W. B. Turk 767,611
Cranes, automatic brake and safety device for hand, E. R. Inman 767,817
Cultivator, G. M. Wright 767,467
Cultivator corn planting attachment, A. D. Harrington 767,405
Current rectifier, periodic, A. D. Lunt 767,759
Curtain fixture, W. S. Miller 767,909
Cuspidor collector and carrier, J. P. Johnson, reissue 12,258
Cuspidor lifter, J. M. Whitney 767,619
Cycles or other mechanism, driving gear for, J. Dickason 767,800
Cylinder reducer, J. N. Paulson 767,526, 767,527
Dental appliance, J. D. Ford 767,743
Dental engine attachment, I. Lyman 767,705
Dental matrix, Z. H. Tibbetts 767,852
Dental trough, P. Edgelow 767,553
Derrick, drill, Emerson & Kerstetter 767,638
Die cutting machine, B. J. Abbott 767,511
Dish or linen washing machine, M. E. Kellum 767,568
Diving suit, Petrie & Martin 767,659
Door fastener, H. Kappele 767,566
Door fly excluding attachment, screen, J. M. Robertson 767,441
Door opener, W. H. Edwards 767,555
Door sill, P. G. Webber 767,615
Door supporting means, sliding, H. C. Smith 767,667
Door track, sliding, H. C. Smith 767,668
Door, window, etc., aperture closing device, G. A. Chaddock 767,796
Dough brake, C. J. Prankard 767,712
Draft rigging, A. C. Mather 767,523
Draft rigging, J. Willison 767,724
Drawing board, J. Shellhammer et al. 767,717
Drawing rollers, apparatus for applying and adjusting the pressure of top, J. Barbour 767,788
Drying apparatus, F. E. Allen 767,727
Drill bit, Muender & De Witt 767,706
Driving mechanism, frictional, E. A. Sperry 767,604
Electric apparatus starting device, vapor, P. C. Hewitt 767,408
Electric conduit, sectional, C. E. Wilson 767,463
Electric connection rosette, M. Norden 767,828
Electric current regulator, F. E. Phillips 767,833
Electric lock, Jacobson & Blasser 767,757
Electric machine, commutating dynamo, E. R. Whitney 767,787
Electric recorder, F. S. Osborn 767,525
Electric switch, Hopewell & Morse 767,889
Electrical distribution system, J. Hallberg. 767,477
Electrical-fixture base, L. Steinberger 767,846
Electrical regulator, automatic, E. Levison. 767,703
Electrically operated apparatus, Sedgwick & Abbott 767,599
Electricity meter prepayment mechanism, B. North 767,495
Electrolytic apparatus, W. J. Schweitzer 767,964
Electromagnetic waves, apparatus for increasing the effective radiation of, J. S. Stone 767,974
Electromagnetic waves, increasing the effective radiation of, J. S. Stone 767,973
Elevator apparatus, J. B. Honor 767,888
Elevator gate, F. A. Swenson 767,850
Elevator safety appliance and speed controlling apparatus, T. Eskilsson 767,930
Engine crank disk and pin, steam, W. R. Fleming 767,877
Engine cylinders and pistons, cooling means for gas, N. E. Egge 767,556
Engines, fuel supply means for explosive, A. A. Low 767,483
Engraving machine, R. E. Gray 767,938
Envelop, H. Smith 767,449
Excavating apparatus, C. W. Rood 767,765
Excavator, G. H. Williams 767,536
Eyeglass frame, I. Fox 767,809
Eyeglasses, J. W. J. Wells 767,617
Fan, blast, D. F. Lepley 767,580

Fastening device, C. Haefliger 767,812
Faucet, G. E. Stillman 767,849
Feed trough, J. Hodgens 767,643
Feeding apparatus, material, W. E. Nickerson 767,591
Fence, movable wire, J. K. Harris..... 767,813
Fence post, C. A. Chamberlin 768,012
Fence stretcher, wire, W. J. Masters..... 767,585
Fence, wire, L. Fretz 767,559
Film, roll, H. Fritzsche 767,880
Filter, T. W. Goreau 767,560
Filter, A. Forbes 767,808
Filter, H. Marsh 768,014
Fire alarm electric circuit closer, Bemiller & Weisensale 767,625
Fire engine heater, steam, J. G. Mattheis. 767,586
Fire extinguisher, detonating alarm, M. A. Libbey 767,902
Fire screen, emergency, W. M. Conran ... 767,870
Firearm ejector mechanism, M. Wirsing... 767,621
Firearm single trigger mechanism, G. E. Witherell 767,537
Fireproofing wood, J. L. Ferrell 767,514
Flanging inplement, J. P. Sneddon 767,602
Flue, pipe, etc., scaper and cleaner, G. K. Wells 767,785
Fluid indicator, J. F. Metten 767,486
Fluids, etc., apparatus for automatic delivery of, E. W. Lindgren 767,903
Fly screen, H. W. Peightal 767,832
Fob, charm, or locket, H. F. W. & H. F. Schleckser 767,963
Friction spring, P. Hien 767,479
Fruit package, knockdown, E. L. Walker... 767,613
Fruit picker, S. H. Kuhn 767,702
Furnace, L. Dietz 767,636
Furnace, W. E. Walsh 767,783
Furnace door opener, automatic, W. Gowin 767,561
Furnace for steam generators, etc., W. H. Longsdorf 767,704
Fuse, percussion, D. J. Cartwright 767,543
Fuse post, self soldering, C. R. Pitrat..... 767,437
Garment fastener, H. S. Pullman 767,957
Gas apparatus, acetylene, A. W. Cram ... 767,736
Gas burner, F. W. Rath 767,958
Gas engine, A. S. Dickison 767,549
Gas holder, T. F. Fitz Simmons..... 767,475
Gas jet igniting and cutting off device, F. Rossbach-Rousset 767,663, 767,664
Gas machine, J. T. Wood 767,857
Gas producers, furnace, etc., feeding device for, S. Forter 767,399
Gas reheating furnace, regenerative, F. Siemens 767,840
Gas valve, combination duplex, G. Wilson. 767,404
Gases non explosive, rendering storage battery, T. A. Edison 767,554
Gasket, O. Reinvaldt 767,763
Gate. See Elevator gate.
Gear, variable speed and reversing, J. C. Busche 767,866
Gear wheel, M. McIntyre 767,825
Gearing, worm, J. W. Moakler 767,588
Gin saw cleaner, cotton, J. Y. Clark 767,868
Glass blottle, etc., making machine, J. Forster 767,515
Glass bottle manufacturing machine, C. Leistner 767,578
Glass furnace, J. E. Berry 767,373
Glass pressing and blowing machine, W. B. Fenn 767,807
Glass, silvering or resilvering, H. P. Strahan 767,608
Glass working machine, I. W. Colburn.... 767,391
Glassware, machinery for the manufacture of, R. Good. Jr. 767,811
Glassware manufacturing machinery, R. Good, Jr. 767,935
Gold leaf condenser, J. B. Ford 767,744
Grain bin signal, Raygor & Slife 767,713
Grain binder automatic trip, E. A. Johnston 767,412
Grain, etc., contrivance for regulating the distribution or feed of, R. H. McClelland 767,762
Grain scourer, J. E. Mitchell 767,910
Grinding machine, V. P. Buck 767,383
Guard board, J. L. Galleciez 767,933
Gun, breech loading breakdown, H. H. Fox 767,557
Gun, spring air, M. F. Stanley 767,968
Hame and trace connector, F. A. Klappauf et al. 767,758
Harrow, G. W. Hoyle 767,890
Harvester binding protector attachment, J. N. Buser 767,867
Harvester, broom corn, F. Sutton 767,775
Harvester grain carrier, Lampe & Hummel. 767,416
Harvester headboard, grain, C. Doering ... 767,396
Harvesting machine, A. Castelin 767,795
Hat dipping machine, S. H. Fanton 767,806
Hay carrier, W. A. Law 767,574
Heating aparatus, combined, W. H. Denslow 767,874
Heating device, automatic low pressure, E. H. Gold 768,019
Hide or skin putting out machine, R. W. Strout 767,451
Hinge, A. A. Page 767,431
Hoist brake device, frictional, Ferguson & Maccoun 767,742
Hoisting and transferring loads, means for, C. A. Morris 768,017
Hoisting and transferring loads, mechanism for, C. A. Morris 768,016
Hoisting and transferring mechanism, C. A. Morris 768,015
Hoof pad, anticontraction steel bar, J. W. H. Chrisman 767,628
Horse blanket, L. F. Mattingly 767,417
Horseshoe, M. D. Glassbrook 767,401
Horseshoe calk, H. Paar 767,711
Horseshoe elastic tread attachment, J. N. Hornblower 767,756
Hose coupling, A. J. Smith 767,843
Hose coupling, W. S. Jewell 767,894
Hose coupling, Silvis & Backer 767,966
Hot air furnace, F. Warner 767,614
Ice creeper, C. F. Jolitz 767,565
Implement, pocket, W. H. Nicholls 767,423
Incandescent mantle support, M. Herskovitz 767,407
Inkstand, W. H. Wetmore 767,856
Insulated conductor and process, J. C. Lee 767,900
Insulator, F. M. Locke 767,948
Jack. See Lifting jack.
Jar or bottle closure, P. H. A. Leder 767,576
Jewelry component, J. C. & J. A. Doran... 767,687
Jointer guard, J. A. Davidsen 767,545
Journal box, S. M. Lewis 767,581
Journal box, self oiling, H. T. Spears..... 767,845
Lace, shoe, C. B. Isakson 767,891
Lacing, D. G. Sunderland 767,720
Ladder and platform, combined, M. Cirigliano 767,388
Lamp attachment, electric, H. D'Olier, Jr.. 767,875
Lamp cluster and switch, R. B. Benjamin. 767,681
Lamp, vapor burning, R. W. Zierlein..... 767,726
Latch, H. F. Keil 767,567
Latch, J. C. Hardenbergh 767,752
Lathe adjustable tool holder, turret, Search & Cheshire 767,598
Lathe, engine, R. Teegler 767,609
Laundry marker, C. A. Bunker 767,627
Lead, manufacturing spongy, J. H. Mercadier 767,906
Lift or the like, H. D. Barlow 767,541
Lifting jack, G. Wideman 767,535
Lifting jack, L. E. Hocker 767,886
Liquid fuel distributer, J. E. Raff..... 767,597
Liquid or viscous substances, machine for applying, M. M. Nicholls 767,422
Liquid separator, centrifugal, B. A. O. Prollius 767,956
Liquid separator liner, centrifugal, C. H. Hackett 767,519
Loading apparatus, wagon, F. L. Doty..... 767,550
Loading device, automatic, T. M. Park.... 767,432
Locking device, drawer, A. G. Johnson.... 767,411
Locket, W. H. Rice 767,836
Locomotive brake, overhead electrically driven, A. E. Brown 767,865
Locomotive, electrical, A. E. Brown 767,863
Locomotive sand box filling apparatus, C. A. Barrett 767,679
Loom filling feeder, weft replenishing, W. Oldfield 767,427
Loom jacquard apparatus, W. W. Hodgson. 767,942
Loom let off, Gossett & Hicks 767,937
Loom shuttle, J. C. Brooks 767,379
Loom weft replenishing means, J. A. Gendron 767,934
Loom weft replenishing mechanism, F. O'Donnell 767,425, 767,426



"Star" Foot and Power Screw Cutting Automatic Cross Feed Lathes
FOR FINE, ACCURATE WORK
Send for Catalogue B.
SENECA FALLS MFG. CO.
695 Water Street,
Seneca Falls, N. Y., U. S. A.

ENGINE & FOOT LATHES. MACHINE SHOP OUTFITS. TOOLS AND SUPPLIES. CATALOGUE FREE. SEBASTIAN LATHE CO. 120 CULVERT ST. CINCINNATI, O.

Foot and Power and Turret Lathes, Planers, Shapers, and Drill Presses.
SHEPARD LATHE CO., 133 W. 2d St., Cincinnati, O.

TAKE THE NICKEL PLATE ROAD FOR THE ST. LOUIS FAIR.
Lowest Rates and many unusual privileges. Special $15.00 rate on certain dates. Full information on application to local Agents, or R. E. Payne, General Agent, 291 Main St., Buffalo, N. Y., or A. W. Ecclestone, D.P.A., 385 Broadway, New York.



THIS GRINDER
Has no pumps, no valves. No piping required to supply it with water. Always ready for use. Simplest in construction, most efficient in operation. *Price will interest you.*
W. F. & JNO. BARNES CO.,
Established 1872.
1999 Ruby St., Rockford, Ill.

Kerosene Oil Engine
Nothing but Kerosene Oil to run it
Simple, Safe and Efficient. Needs little attention, is less likely to get out of order, and is cheaper to run than any other engine manufactured. Economical and Easily Operated.
International Power Vehicle Co.
Stamford, Conn.

Patents, Trade Marks,
COPYRIGHTS, etc.,
Address MUNN & CO., Solicitors of Patents
Office of the SCIENTIFIC AMERICAN
361 Broadway, New York.
Branch Office, 625 F St., Washington, D. C.
Hand-book Sent Free on Application.



Carriage Motors
For Bicycle, Contact or Jump Spark
One Piece Casting. Light Weight. Large Bearing Surfaces. Write us to-day
GRANT-FERRIS CO.
Troy, N. Y.

WARREN'S
Natural Asphalt Sand Surfaced ROOFING
Apply it yourself. Makes a finished gravel roof. Comes ready to lay in rolls of 108 square feet. Write for sample, circular and prices.
Warren Chemical and Mfg. Co. 18 Battery Pl., New York

SOMETHING NEW!
Our Hand IGNITER needs no batteries to start your gasoline engine. A few turns of the handle produces a large spark. Purchase one of these igniters and save trouble and expense with batteries. We carry a full line of Magnetos, Dynamos, etc. Write for catalog.
THE CARLISLE & FINCH CO.
233 E. Clifton Ave., Cincinnati, O.

STEAM TURBINES.—THEIR CONSTRUCTION, Operation and Commercial Application. SCIENTIFIC AMERICAN SUPPLEMENTS 1306, 1307, 1308, 1422, 1400, 1447, 1370, 1372. The articles have all been prepared by experts in steam engineering. Price 10 cents each, by mail. Munn & Co., 361 Broadway, New York City, and all newsdealers.

TOOLS AS A TOPIC
must be interesting to every handicraftsman. There is a mine of information in
Montgomery & Co.'s Tool Catalogue
which enumerates thousands of tools. Capital handbook of reference. Profusely illustrated. Sent by mail for 25 cents, discount sheet included.
MONTGOMERY & CO.,
105 Fulton St., New York City.

The Franklin Model Shop.
Experimental work for inventors; anything in metal from a single piece to a complete working model. Apparatus for colleges. Exhibition models. Introduction samples of patented articles. Special tools for making metal novelties. Inventions perfected. Drawings and designs worked out from inventors' ideas. Send for circular 9.
PARSELL & WEED,
129-131 West 31st Street, New York.

MATCH MACHINERY.
BIG MONEY IN MATCHES.
We manufacture everything pertaining to the business. The Very Latest Process. We will furnish a manager or teach any purchaser the business.
F. W. MURPHY & BRO.,
1118 Ashland Block, Chicago, Ill., U. S. A.



DO YOU USE GRINDSTONES?
If so we can supply you. All sizes mounted and unmounted, always kept in stock. Remember, we make a specialty of selecting stones for all special purposes. *Ask for catalogue.*
The CLEVELAND STONE CO.
2d Floor. Wilshire. Cleveland, O.

The St. Louis Fair
will be reviewed in its technical aspect in the columns of the *Scientific American Supplement.*
Each number of the *Scientific American Supplement* contains one or more articles on the Engineering and Scientific Exhibits of the Fair, illustrated with photographs especially taken for us.
If you cannot go to the Fair you can at least learn all about its technical novelties by reading the *Scientific American Supplement.*
Each number costs 10c. by mail. Order through your newsdealer or from
MUNN & CO., Publishers
361 Broadway, New York

Luggage carrier, C. Lederman 767,823
Mail bag holder, N. Olson 767,428
Massaging implement, A. U. Patchen..... 767,593
Match receptacle, burned and unburned, H. S. Alexander 767,675
Measuring instrument damping device, V. Arcioni 767,372
Measuring instrument, optical, J. G. Stewart 767,847
Measuring vessel, O. G. Kelly 767,697
Mechanical movement, J. T. Hogan 767,481
Mechanical movement, J. W. Martin 767,760
Metal, expanded, N. E. Clark 767,798
Metal strips, machine for producing crimped or corrugated, W. P. Grafton 767,883
Mold, J. M. Ozee 767,829
Mortising machine, H. S. Spencer 767,504
Motor control, J. D. Ihlder 767,691, 767,692
Motor control, alternating current, M. Milch 767,761
Movements from a distance, means for controlling, M. R. Hanna 767,751
Muffler, N. T. Harrington 768,013
Music roll for pianolas, etc., W. S. Pain.. 767,830
Music roll inclosing case, automatic, M. S. Wright 767,673
Music sheet spool, perforated, F. Taft.... 767,722
Musical instrument pneumatic action, M. S. Wright 767,672
Musical instrument, stringed, A. Olson.... 767,656
Musical instruments, expression mechanism for pneumatically actuated, E. S. Votey 767,781
Nail, E. P. Hurd 767,520, 767,521
Necktie fastener, W. C. Doyle 767,474
Nut lock, J. E. Hart, ... 767,642
Nut lock, F. Reed 767,661
Nut lock, W. Jarrell 767,694
Oil burner and furnace, combined fuel, A. J. Smithson 767,601
Oil, drying, W. N. Blakeman, Jr..... 767,682
Oil separators, apparatus for controlling the discharge of drips from, M. P. Osbourn 767,709
Ore concentrator, C. A. Christensen..... 767,926
Package carrier, Harris & Schobert 767,884
Packages, mechanism for filling and settling goods in, W. H. Doble 767,393
Packing, piston, M. M. Barnes 767,728
Pad. See Hoof pad.
Paint compound or mixture, W. N. Blakeman, Jr. 767,683
Paper clip, A. Weis 767,458
Paper cutting machine, L. Alliss 767,676
Paper drier, W. White 767,618
Paper fastener, Bronson & Watson 767,512
Paper fastening device, T. F. Russell 767,444
Paper knife and mail opener, combination, J. A. Knight 767,647
Pasteurizer, W. J. Ruff ..... 767,960 to 767,962
Peeler, vegetable, J. N. Buell 767,733
Peeling machine, tomato, G. G. Glenn..... 767,517
Photographic developer, Homolka & Schwan 767,815
Piano action, Berglund & Dowd 767,790
Piano pin and string treating composition, C. H. Pierce 767,499
Pick, S. Montgomery 767,951
Pictures, shades, etc., pole for hanging or taking down, P. E. Page 767,496
Pin tongue joint, C. W. Kelley 767,895
Pipe or cigar holder mouthpiece, C. Elkin, Jr. 767,804
Pipe puller, J. W. Walker 767,782
Pipe trap, waste, T. Linke 767,904
Pipe wrench, C. H. Thurston..... 767,532
Planing machine cutter, wood, G. Johnson, Jr. 767,564
Planing or like machines, driving mechanism for, R. W. & L. H. Bateman 767,789
Plaster, etc., composition for wall, A. W. Perkins 767,434
Pliers, impressing and perforating, J. Sohn 767,603
Plow, beet, H. F. Thompson 767,919
Plow turf cutting attachment, F. Renfrew.. 767,714
Plumb and level, C. J. Dewaine 767,392
Pocket book, H. Brueger 767,793
Post or pole, D. Warner 767,533
Powder pellets, machine for manufacturing compressed explosive, L. Davies 767,872
Powder factor indicator, L. T. Robinson... 767,764
Power transmission, W. Stanley 767,773
Preservation of food, apparatus for the, C. Beale 767,921
Printing machinery, pattern, C. L. Burdick. 767,684
Projectile, G. W. Ball 767,920
Pump, duplex, D. F. Lepley 767,579
Pump engaging or disengaging device, automatic air, C. Nielsen 767,912
Pump, oil well, W. Taylor 767,454
Pump, rotary, W. W. Robinson 767,442
Pumping engine, duplex, E. Vogel 767,692
Punching machine, T. F. Phillipi..... 767,914
Puzzle, W. J. Kelly 767,645
Rail clamp, J. Talbert 767,851
Rail, guard, D. F. Vaughan 767,779
Rail joint, J. T. Davis 767,546
Railway cable clip, suspended cable, H. W. Reinhold 767,439
Railway cattle guard, G. W. Gwyn et al.. 767,748
Railway conductor, electric, A. Whittier... 767,534
Railway cross tie and clamp, E. Flora..... 767,878
Railway or tramway rail, J. Bigwood..... 767,729
Railway switch, Gushwa & Harper 767,518
Railway switching apparatus, J. P. Coleman 767,629
Railway tie, metallic, D. P. Bosworth... 768,008
Rake, M. F. McLoughlin 767,420
Ram, hydraulic, E. H. Foster 767,516
Reinforce, J. F. Francia 767,932
Releasing die, turret or screw machine, C. M. Smillie 767,842
Rheostat, I. B. Smith 767,916
Rice polishing machine, R. W. Welch 767,459
Rod. See Connecting rod.
Roller screen, M. F. Hutchinson..... 767,644
Rolling black plates or sheets, C. W. Bray 767,731
Rolling mill feed mechanism, C. W. Bray. 767,730
Roof repairing apparatus, shingled, L. S. Boulter 768,009
Roofing or siding, F. W. Terpening 767,723
Rotary mold, J. C. Davis 767,928
Sad iron support, A. Stamm 767,506
Sash lock, A. J. Ashley 767,677
Saw holder, T. D. Gayle 767,641
Sawing apparatus, crosscut, D. E. Crouch. 767,634
Sawing machine, O. W. Fairfield 767,397
Sawing machine, box stuff, G. A. Smith... 767,967
Scaffolding bracket, J. M. Sackman..... 767,768
Scale frame, C. B. Hurst 767,690
Scale, wagon, C. Skidmore 767,841
Screen, W. E. Monroe 767,487
Seaming head, double, Lugibihl & Zehrbach 767,651
Separating device, D. K. Swartwout 767,721
Sewing machine, buttonhole, D. H. Haywood 767,478
Sewing machine, buttonhole, J. T. Hogan... 767,480
Sewing machine feed mechanism, J. C. Fogarty 767,931
Sewing machine, ornamental stitch, D. Griffiths 767,688
Sewing machine, shoe, E. Smith 767,666
Shade mounting, window, Dittenheimer & Erikson 767,741
Shade roller bracket, P. Lanouette 767,899
Sharpening device, disk plow, I. Ovens.... 767,710
Shaving machine, R. W. Strout 767,452
Sheave, wheel, or pulley, R. H. Bowen ... 767,377
Sheet metal box, J. A. Bower 767,378
Shingle die, N. E. Palmer 767,913
Shipping box packing frame, Haas & Kochs 767,749
Shoe shining machine, S. Browne 767,382
Shot making machinery, Pearson & Peters. 767,831
Shovel protector plate, W. W. Davis 767,739
Show case, L. J. Everest 767,805
Show case, knockdown all glass, W. K. Williams 767,462
Show windows, means for illuminating, G. K. Maltby 767,484
Sign, etc., post, street, B. Haskell..... 767,406
Sign, street, M. Hofheimer 767,814
Signs, card or ticket for actuating the mechanism controlling electric light, Norden & Crandall 767,424
Skein package, R. A. Bonner 767,791
Skirt supporter and placket fastener, combined, E. Clewell 767,869
Sled, coasting, W. E. Kidder 767,821
Slicer, potato, C. Canclini 767,386
Smoker's accessory, J. Weissenstein 768,007
Snow scraper, I. Wonnacott 767,725
Soldering apparatus, Wirth & Beech 767,465
Soldering armature leads to commutator bars, J. Beech 767,472
Sole cutting rounding machine tool, D. F. Hartford 767,754
Spark arrester, locomotive, or other boiler, J. C. Bowring 767,860

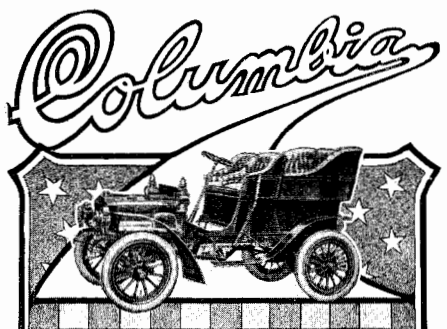

Light Gasolene Tonneau
Mark XLIII

Without special gears or extra devices of any kind, regular stock model with full touring equipment won event for cars costing from $1,000 to $1,800 in Mount Washington Climbing Contests; also Gold Medal in White Mountain Endurance Run. Price **$1,750.** Catalogue will be sent on request; also special catalogues of Columbia Electric Town Carriages and Commercial Vehicles.

ELECTRIC VEHICLE CO. - Hartford, Conn.
NEW YORK 134-138 W. 39th St. BOSTON 74 Stanhope St. CHICAGO 1413 Michigan Ave.
Member Ass'n Licensed Automobile Manufacturers

Large Contracts Solicited

Our factories are so numerous and so completely equipped that we can compete successfully on large contracts—such as sheet steel stampings, general manufacturing and machine shop work.

Pope Manufacturing Co.
21 Park Row, New York City

Not in the Front Rank. It is the Leader
2½ H. P. Single Cylinder Motor Cycle

For Speed Long Life Mileage Power



For Pleasure Business Economy Style

Our **Double-Cylinder** Machine holds all **world's records.** Motors and accessories sold separately. Send for catalog
G. H. CURTISS MFG. CO. - Hammondsport, N. Y.



For PIPE-THREADING or CUTTING

there is no machine on the market that can compare for ease of operation and excellence of work with

FORBES PATENT DIE STOCK

Vise is self-centering and dies are adjustable to any variation of the fittings. Parts can be duplicated at slight cost when worn out. Will thread and cut up to 12 in. pipe.
CATALOGUE FREE.

MACHINE No. 30. Range ¼-2in. R. & L.
CURTIS & CURTIS CO., 6 Garden St., Bridgeport, Conn.

ELECTRIC LAUNCH MOTOR. — THE design in this paper is for a motor of unusual simplicity of construction, which can easily be built by an amateur at small cost. It is intended for a boat of about 24 feet over all and 4 feet 6 inches beam, drawing 18 inches, and is capable of propelling such craft at a speed of 7 miles per hour. Illustrated with 21 cuts. See SCIENTIFIC AMERICAN SUPPLEMENT, No. **1202.** Price 10 cents by mail, from this office and from all newsdealers.



To Owners of Gasoline Engines, Automobiles, Launches, Etc
The **Auto-Sparker**
does away entirely with all starting and running batteries, their annoyance and expense. No belt—no switch—no batteries. Can be attached to any engine now using batteries. Fully guaranteed; write for descriptive catalog.
Motsinger Device Mfg. Co.,
14 Main St., Pendleton, Ind.



"The Sharer"
A new foot power that can be applied to all light machinery. A kick starts the machine and an occasional kick keeps it going. *Send for our Booklet.*
SLOTKIN & PRAGLIN,
210A Canal St., New York.

The Scientific American Supplement
OF SEPTEMBER 3
will contain these articles on the
ST. LOUIS FAIR

Edison Historical Exhibit
Twenty-foot Wooden Pulley
The Exhibit of Welded Steel

ALL ARTICLES FULLY ILLUSTRATED

The Supplement costs 10 cents by mail

MUNN & CO.
361 Broadway New York

Speed indicating alarm, Cahill & Landgraf	767,734
Spike extractor, L. D. Butters	767,925
Spirometer, H. T. Lyttleton	767,522
Spring. See Friction spring.	
Spring support, G. E. Bigelow	767,374
Stacker, hay, F. L. Doty	767,551
Stave sawing machine, T. H. Webster	767,784
Stay covering machine, dress, Osborne & Kelly	767,708
Steam boiler, Barger & Williams	767,923, 767,924
Steam boiler, fire tube, G. Inglis	767,816
Steam generator, W. Mitchell	767,950
Stocking, H. Brown	767,381
Stove, F. J. Pioch	767,834
Stove, furnace, etc., cleaning device, V. K. Korjibsky	767,648
Stove, gas, J. J. Konigs	767,701
Stove or furnace, heating, E. O. Daniels	767,738
Stovepipe clamp, G. E. Reynolds	767,500
Strainer, F. H. Vogt	767,780
Strainer, teapot, A. F. Barnett	767,471
Stropping machine, O. Kampfe	767,696
Superheater, J. H. Rosenthal	767,766
Switch throwing device, W. B. Perry	767,436
Syringe, hypodermic, H. J. Detmers	767,686
Syrup cups, etc., double lid for, J. L. Taylor	767,917
Tapping apparatus, Pentlarge & Vehr	767,658
Target trap discharging mechanism, P. North	767,707
Telegraph receiving device, wireless, J. S. Stone	767,971
Telegraph signals, apparatus for simultaneously transmitting and receiving space, J. S. Stone	767,970
Telegraph signals, receiving space, J. S. Stone	767,972
Telegraphy, space, J. S. Stone .. 767,975 to	768,005
Telephone circuit, W. W. Jacques	767,818
Telephone hook switch, C. T. Mason	767,584
Telephone support and switch, F. R. McBerty	767,489
Telephone switchboard circuit party line ringing device, Lattig & Goodrum	767,573
Telephone system, F. R. Parker	767,953
Telephone transmitter, C. W. Harper	767,753
Thermometer, incubator, A. Neubeck	767,493
Thread dressing machine, G. A. Fredenburgh	767,640
Thread immersing device, G. A. Fredenburgh	767,639
Three way split switch, T. Dean	767,740
Threshing machine, H. Schleusner	767,915
Ticket distributer, C. H. Townsend	767,610
Till, shop check, W. W. Connell	767,633
Time recorder, watchman's, J. & H. E. Summers	767,453
Tire, J. B. London	767,583
Tire inflating device, pneumatic, F. Glassup	767,402
Tire tightener, N. T. Leveritt	767,649
Tire, vehicle, C. Stein	767,606
Tire, vehicle, H. Lutz	767,949
Tires, shaping rubber wheel, F. S. Ornstien	767,430
Tobacco pipe, W. Disch	767,801
Tool, electrically heated, T. Van Aller	767,777
Tool stop, machine, J. B. Orbison	767,592
Torpedo, G. G. Turner	767,776
Torpedo, dirgible, D. W. McCaughey, 767,490 to	767,492
Toy pistol, R. A. Brooks	767,380
Track lubricator, automatic, R. G. York	767,858
Tram or railway point or switch and means for working same, Leighton & Hacking	767,577
Transformer earth shield, C. F. Scott	767,503
Transformer, multiple secondary, Peck & Fortescue	767,497
Trap. See Pipe trap.	
Trolley pole head, J. E. Greenwood	767,939
Trolley wheel, E. W. Potts	767,954
Trolley wheel, self-lubricating, E. W. Potts	767,955
Trolleys, means for operating overhead, A. E. Brown	767,862
Truck, Price & Peckham	767,660
Truck, lumber, W. J. Daley	767,635
Truck, swivel, W. L. McCabe	767,911
Trunnion for shutters, etc., J. H. French	767,558
Truss, J. M. Simmons	767,718
Tubes, apparatus for safe-ending, P. H. Seery	767,665
Turbine, elastic fluid, H. Wiesner	767,671
Turbine, steam, P. J. Hedlund	767,689
Turbine with locomotives and vehicles, combination of the reversible steam, G. S. Granlund	768,010
Turn table, switching, A. E. Brown	767,864
Typewriting machine, J. Oppenheim	767,429
Typewriting machine, L. H. Perry	767,528
Typewriting machine, J. C. St. John	767,607
Typewriting machine ring shifting device, G. M. Kitzmiller	767,945
Typewriting machine, shorthand, P. A. Voget	767,508
Typewriting machine tabulating device, J. B. Secor 767,838,	767,839
Typewriting machine type bar, supporting ring and hanger, G. M. Kitzmiller	767,946
Unloading apparatus, R. H. Dempcy	767,548
Upholstery spring support, G. E. Bigelow	767,375
Valise, rail, J. Ruegg	767,767
Valve centralizing operating mechanism, R. C. Bromley	767,732
Valve gear, G. W. Spragins	767,505
Valve gear, internal combustion engine inlet, A. P. Brush	767,794
Valve, hydraulic, M. Sjoberg	767,600
Valve mechanism, basin outlet, G. A. Soderlund	767,450
Valve, steam actuated, Picard & Bureau	767,498
Vapor or gas exhausting apparatus, V. Schwaninger	767,502
Vaporizer, Ver Planck & Lucke	767,456
Vehicle, W. W. Robinson	767,529
Vehicle, autotraction, A. Wenberg	767,460
Vehicle wheel, A. J. Carley	767,542
Vehicle wheel runner attachment, G. F. Meyer	767,907
Vending machine, R. Ziebell	767,674
Veneer cutting machine, J. Wolfinger	767,466
Veneer drier, A. S. Nichols	767,654
Veneer sawing machinery, A. B. Calkins	767,385
Vertical tubular boiler, W. Norris	767,655
Vessel fin, adjustable, H. J. Noll	767,827
Vessel, submarine salvage, J. M. Roaul	767,835
Wagon seat lock, L. P. Moore	767,589
Wall construction, J. A. Ferguson	767,398
Wall construction, F. E. Kidder .. 767,413,	767,414
Washing machine, T. J. Steen	767,969
Water heater, J. H. George	767,810
Water purifier, W. H. Green 767,746,	767,747
Water purifying apparatus, C. L. Kennicott	767,698
Weather strip, door, T. D. Snow	767,771
Weighing and filling machine, W. H. Doble	767,394
Well, M. D. Rochford	767,443
Well drill, deep, A. F. Darling	767,685
Wheel rim finishing machine, N. D. Chard	767,387
Whiffletrees to cross bars, device for attaching, B. H. Kellogg	767,820
Windmill regulator, automatic, A. P. Hoesly	767,562
Window cleaning device, C. Levy	767,650
Window opener, J. C. Zutt	767,470
Window, prismatic, G. K. Cummings	767,799
Window screen, H. W. Peightal	767,433
Window screen and sash, adjustable, H. H. Kerckhoff	767,896
Wire fastener, J. E. Watters	767,855
Wire stretcher, G. H. Mielke	767,587
Wire stretcher, J. H. Ladd	767,897
Woodwork polishing wheel, C. H. Kimberly	767,699
Work holder, O. H. Eichblatt	767,876
Wrench, Glover & Hulbert	767,403
Wrench, D. F. Taylor	767,531
Wrench, W. A. Lefler	767,901

DESIGNS.

Brushes, mirrors, or similar toilet articles, back for, W. H. Blake	37,089
Card mount, H. H. Collins, Jr.	37,087
Clock stand, electric alarm, A. Y. Darche	37,091
Comb, F. W. Grell	37,090
Grave marker, Miller & Todd	37,093
Spoons, forks, or similar articles, handle for, E. Goetze	37,088
Stove window setting, O. F. Drury	37,092

Repeating Rifles For Hunting.

Shoot a Winchester once and you will shoot a Winchester always: That's because Winchester rifles after a test of over thirty years represent today in accuracy, reliability and quality, the highest development of the gun-maker's art. Whatever your preferences may be, some one of the nine different Winchester models will surely suit you; for they are made in all calibers, styles and weights. Use Winchester guns for all kinds of shooting and Winchester cartridges for all kinds of guns.

See our Exhibits at St. Louis in Manufacturers and Fish and Game Buildings.

WINCHESTER REPEATING ARMS CO., NEW HAVEN, CONN.

COMBINATION SCREW DRIVER
Complete, with three screw driver tips and three brad awls, $1.50
Send for particulars. Catalogue No. 17 B of Fine Tools free.
THE L. S. STARRETT CO., Athol, Mass., U.S.A.



NOISELESS
Bevel Pinions
We can furnish our New Process Noiseless Pinions in bevels as well as spurs of any size wanted and to transmit any required horse power. Write for catalogue.
THE NEW PROCESS RAWHIDE CO.
Syracuse, N. Y.

MARINE ENGINES
1½ to 40 H. P.
1, 2, 3 and 4 Cylinder
Launches
17 to 50 feet
Send for new catalog



GRAND RAPIDS GAS ENGINE & YACHT CO.
Grand Rapids, Mich.



ARTESIAN
Wells, Oil and Gas Wells drilled by contract to any depth from 50 to 3000 feet. We also manufacture and furnish everything required to drill and complete same. Portable Horse Power and Mounted Steam Drilling Machines for 100 to 1200 feet. Write us stating exactly what is required and send for illustrated catalogue. Address
PIERCE WELL ENGINEERING AND SUPPLY CO.
136 LIBERTY STREET, NEW YORK, U. S. A.

If You Want the Best Lathe and Drill CHUCKS

BUY WESTCOTT'S *Strongest Grip, Greatest Capacity and Durability, Cheap and Accurate.*



Westcott Chuck Co., Oneida, N. Y., U. S. A.
Ask for catalogue in English, French, Spanish or German.
FIRST PRIZE AT COLUMBIAN EXPOSITION, 1893.

PERFECT - PUMP - POWER.



is attained only in the **TABER ROTARY PUMPS**
They are mechanical simple and durable. Will pump hot or cold fluid, thin or thick. Requires no skilled mechanic. Most power at least cost. All parts interchangeable. Made of iron, steel or bronze. Can be driven by belt, motor or engine attachment. *Large Illustrated Catalogue free.*
TABER PUMP CO., 32 Wells St., Buffalo, N.Y., U. S. A.

Properly Used a
COLT REVOLVER
IS INDESTRUCTIBLE

THE QUALITY OF MATERIAL AND THE PERFECTION OF WORKMANSHIP GIVE IT THE POWER TO STAND ABUSE AS WELL AS USE. SIXTY YEARS OF EXPERIENCE IN THE MAKING TO PROTECT YOU IN THE TIME OF NEED.

Catalogue Free

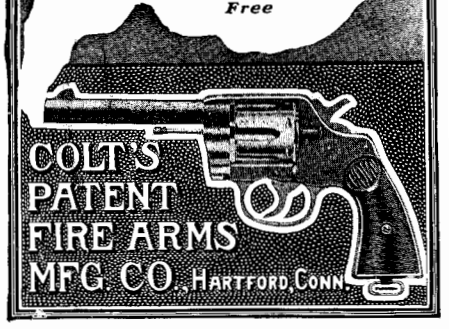



WATER A PERPETUAL SUPPLY *usually* means perpetual expense. The windmill and gasoline engine are costly to install and run. **Niagara Hydraulic Ram** will work continuously wherever there is a running stream. Nothing to blow down, blow up, or require attention. Requires less head of water to operate than any other ram. *Never needs repairs.* Catalogue free.
Niagara Hydraulic Engine Co
CHESTER, PA.

THE EUREKA CLIP



The most useful article ever invented for the purpose. Indispensable to Lawyers, Editors, Students, Bankers, Insurance Companies and business men generally. Book marker and paper clip. Does not mutilate the paper. Can be used repeatedly. In boxes of 100 for 25c. To be had of all booksellers, stationers and notion dealers, or by mail on receipt of price. Sample card, by mail, free. Manufactured by **Consolidated Safety Pin Co., Box 121, Bloomfield, N. J.**
Size No. 2.

Volt Ammeters



Pocket size, but large enough for accuracy and practical use. Various ranges for testing batteries electric light, telephone and other circuits, etc Also, Voltmeters and Ammeters for general measurements.
☞ *Send for Circular.*
L. M. PIGNOLET,
80 Cortlandt St., New York, N.Y.

Do You Want Good Information Cheap?

Write to us and we will refer you to a SCIENTIFIC AMERICAN SUPPLEMENT that will give you the very data you need.

SCIENTIFIC AMERICAN SUPPLEMENT articles are written by men who stand foremost in modern science and industry.

Each SCIENTIFIC AMERICAN SUPPLEMENT costs only 10 cts. But the information it contains may save you hundreds of dollars.

Write for a catalogue of SUPPLEMENT articles. It costs nothing.

Act on this suggestion!

MUNN & COMPANY
361 Broadway, New York

A Free Trial Bottle of Hydrozone

sent on receipt of 10c. to pay postage. Positively relieves and cures Oak or Ivy Poisoning, Sunburn, Prickly Heat, Hives, and immediately takes the sting out of Mosquito Bites. A marvelous remedy for burns, and will positively prevent blood poisoning from cuts or abrasions.

Sold by leading druggists.
None genuine without my signature.

Prof. Charles Marchand

Dept. U, **63 Prince St., New York**
Send for free Booklet on "How to treat diseases," containing hundreds of testimonials of wonderful cures.

Our Weekly Market Letter

written with conciseness and authority, deals with the matters of the hour, pertaining to Stock and Bond Investments. Upon request, your name goes on our mailing list.

Corey, Milliken & Co.
BANKERS AND BROKERS
15 State Street, Boston, Mass.

THE FINSEN LIGHT TREATMENT

CURES ALL SKIN DISEASES AND CANCER

PROF. NIELS R. FINSEN.

NO matter what skin disease you have it can be successfully treated by the FINSEN Light Treatment. Endorsed and endowed by the rulers of four great nations. No operation, medicine or pain. WRITE today describing your case and get our 80-page book which describes the treatment fully. It is **FREE.**

The Finsen Light Institute of America
Suite D 78 State Street, Chicago

CABOT'S
Sulpho-Napthol
LIQUID CLEANLINESS TRADE MARK

For Tender, Aching Feet

Relieves pain; reduces swelling; destroys odors; cures offensive perspiration. At all dealers. Look for Trade Mark. 10c. and 25c. packages by mail o.
Sulpho-Napthol Co., 15 Haymarket Sq., Boston, Mass,
Acker-Merrall's; Macy's; Siegel Cooper, New York City.

ELECTRIC SEWING MACHINE MOtor.—The instructions and numerous illustrations of details contained in this article will enable any mechanic of average ability to build an efficient motor that will operate a sewing machine. The cost of materials for this machine should not exceed five dollars. See SCIENTIFIC AMERICAN SUPPLEMENT, No. **1210.** Price 10 cents by mail, from this office and from all newsdealers.

THE "BEST" LIGHT

Is a portable 100 candle power light costing only two cents per week. Makes and burns its own gas. Brighter than electricity or acetylene and cheaper than kerosene. **No Dirt. No Grease. No Odor.** Over 100 styles. Lighted instantly with a match. Every lamp warranted. **Agents Wanted Everywhere.**

THE "BEST" LIGHT CO.
87 E. 5th St., Canton, O.
Owners of Original Patents.



50 Years' Experience

PATENTS

Trade Marks, Designs, Copyrights, Etc.

Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. Handbook on Patents sent free. Oldest agency for securing patents.

Patents taken through MUNN & Co. receive *Special Notice*, without charge, in the

Scientific American

A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, $3 a year; four months, $1. Sold by all newsdealers.

MUNN & CO. 361 Broadway, **New York**
Branch Office 625 F St. Washington, D. C.

TRADE MARKS.

Arch supporters, W. M. Eisen..... 43,211
Bitters, Bitter Apple Bitters Co..... 43,200
Blowpipe system, certain named, P. C. Miller 43,215
Boxes, L. Hefter 43,194
Bricks for paving and building purposes, Nelsonville Sewer Pipe Co..... 43,174
Canned fish, O. Shepard & Co..... 43,180
Chemical substances, certain named, Actien Gesellschaft fur Anilin Fabrikation.... 43,189
Cigars, L. J. Stadeker 43,183
Cigars, cheroots, and cigarettes made of cigar tobacco, Cayey Caguas Tobacco Co. 43,182
Coal, Chesapeake & Ohio Coal & Coke Co. 43,175
Compound for the treatment of certain named diseases, G. W. Caldwell..... 43,203
Crayons, chalk, E. B. Brady 43,172
Dip for external use, M. W. Savage..... 43,207
Food, stock, Stock Food Company of America 43,164
Garment supporters, certain named, Harris Suspender Co. 43,178
Glassware, graduated, W. J. Tweed..... 43,173
Hair remedy, Herpicide Co. 43,205
Liquor for pharmaceutical use, aromatic iron, Knoll & Co. 43,208
Machinery, certain named, Duluth Gas Engine Works 43,196
Mattresses, cushions, and couches, Hirsch & Spitz Manufacturing Co..... 43,160
Measuring vessels, sheet metal, F. X. Massot 43,213
Medical compound or tonic for certain named diseases, York Chemical Company.... 43,185
Medicine for certain named diseases, Black Diamond Medicine Co. 43,186
Mineral water, Johnson Bros. 43,184
Oil, olive, A. Agosto 43,163
Ointment and cutaneous preparations and remedies, R. Reiss 43,188
Ointment for the cure of certain named diseases, E. T. Dunkeson 43,169
Ointments, Caffeeno Drug Company of Baltimore City 43,170
Olives and pickles, O. Shepard & Co..... 43,181
Packing rings of rubber, steam, B. F. Goodrich Company 43,217
Paint, black waterproof roofing, Atlantic Refining Co. 43,190
Paints, mixed, Water Paint Company of America 43,191
Papers, envelops, and blank books, M. M. Kallman 43,156
Paste, certain named Italian, Maull Bros. 43,161
Pile cure or remedy, J. G. Walker..... 43,206
Plastic material, certain named, viscoloid Co. 43,210
Razors and edge tools, strop dressing and preparations for sharpening, Razorine Manufacturing Company 43,171
Remedies for certain named diseases, Radio-Sulpho Co. 43,201
Remedies for certain named diseases, J. Mainzer 43,202
Remedy for cancer, herb compound used as a, R. H. Browning 43,187
Remedy for sore throat, tonsillitis, and diphtheria, C. H. Jennings 43,165
Remedy for the cure of certain named diseases, P. R. Palethorpe 43,204
Remedy, rheumatism, Yale Chemical Company 43,168
Rheumatism drops, Die Administration der Dr. Sulzberger 'schen Armen- und Krankenstiftung 43,166, 43,167
Safes, Herring-Hall-Marvin Safe Co..... 43,216
Sewing machines and attachments, Illinois Sewing Machine Company 43,176
Shaving appliances, certain named, Kampfe Bros. 43,193
Shoes, ladies' leather, Lindner Shoe Co., 43,157, 43,158
Skirts, women's outer or walking, Rock Island Skirt Company 43,159
Soap, Lanman & Kemp 43,179, 43,199
Soldering flux, liquid, O. J. Lanigan..... 43,209
Syrup, molasses, and sorghum, New Orleans Coffee Co. 43,197, 43,198
Tableware, flat and hollow, Wm. A. Rogers, Limited 43,212
Tobacco and cigarettes made from such tobacco, smoking, Carreras 43,162
Trees, spray mixture designed for the treatment of fruit, Thomsen Chemical Company 43,192
Vehicles, certain named mechanically propelled, Pope Manufacturing Company.. 43,195
Waists, petticoats, and skirts, women's, Burton Bros. & Co. 43,177

LABELS

"Atlas Silver Polish," for silver polish, Davidow Brothers 11,310
"Carters Lettuce Headache Powders," for headache powders, W. A. Towles, Jr.. 11,314
"Casting Club Rye Whiskey," for whisky, Union Wholesale Liquor Co..... 11,305
"Country Sorghum," for molasses, C. E. Coe 11,308
"Distillata," for distilled water, City Ice Delivery Co. 11,306
"Hero-Pine," for cough remedy, Kramer & Wegener 11,318
"Kink Cure," for medicine, T. R. Bellamy 11,315
"Odorcide," for toilet lotion, Leonhardt, et al. 11,311
"Payne's Alfalfa Molasses Feed," for alfalfa molasses feed, G. H. Payne.. 11,309
"Peerless Spring Water," for water, F. E. Walker 11,307
"Pepsimint," for medicine, J. M. Toulson. 11,316
"Peterson's Bunion Relief," for bunion remedies, M. F. Peterson & Co..... 11,319
"Prairie Chief," for flour, Western Flour Mill Co. 11,304
"Roman Massage Cream and Skin Food," for toilet preparation, Booth Manufacturing Co. 11,312
"Strawberry Massage Cream and Skin Food," for toilet preparation, Booth Manufacturing Co. 11,313
"The Rectucura Company," for a remedy, Rectucura Remedy Company 11,317

PRINTS.

"American Loto," for a game, L. F. Olszewski 1,044
"Chesapeake," for canvas or cotton belting, Chesapeake Belting Company..... 1,047
"Gilman's Outfit for the Cure of Milk Fever," for medical apparatus, Z. D. Gilman 1,050
"Glycerine Tar Soap," for soap, Gray Lithograph Co. 1,049
"Homogeneous," for steel fittings, American Standard Steel Fitting Co..... 1,051
"Men's & Boys' Attire for Fall & Winter 1904-05," for men's and boys' apparel, W. C. Both 1,046
"No Doubt About It," for flour, Washburn, Crosby Company 1,048
"Schloss Bros. & Co. Fine Clothes Makers," for clothing, Schloss Bros. & Co..... 1,045
"Star Safety Razor," for razors, Kampfe Bros. 1,052

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list. For terms and further particulars address **Munn & Co., 361 Broadway, New York.**

THE HARRINGTON & KING PERFORATING CO.
PERFORATED METAL OF EVERY DESCRIPTION, FOR ALL USES.
225 NO. UNION ST CHICAGO, ILL.

Notice to Contractors

Sealed proposals, addressed to the State Commission in Lunacy, The Capitol, Albany, N. Y., will be received until 12 o'clock noon, August 31, 1904, for the construction of covered masonry filters, pure water reservoir and appurtenances for the Hudson River State Hospital at Poughkeepsie, N. Y. Plans, specifications and form of bid may be seen at the office of the State Commission in Lunacy, Albany, and at the office of Allen Hazen, Consulting Engineer, St. Paul Building, New York.

SPECIAL MANUFACTURING.
DIES AND STAMPINGS TO ORDER.
SPEC'L MACHINERY-MODELS-EXPERIMENTAL WORK.
DROP FORGING DIES AND DROP FORGINGS.
HARDWARE SPECIALTIES etc. MANF'D TO ORDER. SEND SAMPLES OR DRAWINGS FOR ESTIMATES. WRITE FOR OUR BOOKLET.
THE GLOBE MACHINE & STAMPING CO.
970 HAMILTON ST., CLEVELAND, OHIO.

ICE MACHINES. **Corliss Engines,** Brewers' and Bottlers' Machinery. THE VILTER MFG. CO., 899 Clinton St., Milwaukee, Wis

CHEMICAL EXAMINATIONS OF ALL KINDS.
DR. H. C. STIEFEL, Bissell Block, Pittsburgh, Pa.

MODELS & GEARS CATALOGUES FREE. UNION MODEL WORKS 193 CLARK, CHICAGO.

MODELS & EXPERIMENTAL WORK. Inventions developed. Special Machinery.
E. V. BAILLARD, Fox Bldg., Franklin Square, New York.

Dies, Tools and Special Machines. Models and Experimental Work. General Machine Work.
PH. J. BENDER & SONS, Inc., 87 Frankfort St., New York

Experimental & Model Work
Cir. & advice free. Wm. Gardam & Son, 45-51 Rose St., N.Y

NOVELTIES & PATENTED ARTICLES
MANUFACTURED BY CONTRACT. PUNCHING DIES, SPECIAL MACHINERY.
E. KONIGSLOW STAMPING & TOOL WORKS, CLEVELAND, O.

Models and Experimental Work. Inventions and Models designed and perfected. Years of success. Modern shop. M. P. Schell, 507 Mission St., San Francisco

NAME PLATES—STEEL STAMPS
EMPLOYEE CHECKS, KEY TAGS & BADGES
J. ROBBINS MFG. CO. 58 KNEELAND ST.,
SEND FOR CATALOGUE ····BOSTON, MASS.

TYPEWRITERS ALL MAKES
All the Standard machines SOLD or RENTED ANYWHERE at HALF MANUFACTURERS' PRICES. Shipped with privilege of examination. Send for Cat.
Typewriter Emporium, 203 LaSalle St., Chicago

THE SCHWERDTLE STAMP CO.
STEEL STAMPS, LETTERS & FIGURES.
BRIDGEPORT CONN.

Roof Leak?
Makes Roofs Last Ten Years Longer

Will Make Your Old Roof Absolutely Waterproof and Look Better Than a New One and Save the Price—Will Add Ten Years to the Life of Any Roof—Guaranteed

Liquid Samples and Book Showing Various Uses Sent Absolutely Free on Request

It is useless to go to the expense of putting on a new roof when you can make the old one good as new in point of service, have it look better and save the price. ROOF LEAK will do it. Guaranteed. It will make an old leaky roof absolutely waterproof. It will add ten years to the life of any roof, new or old. It stops and prevents rusting in tin or iron roofs and arrests and prevents decay in shingle roofs.

ROOF LEAK is put up in heavy liquid cement form and is applied as received. You will be surprised to learn how cheap you can make your old roof new or make your new roof last a lifetime It will not crack in winter or soften in summer, and is highly FIREPROOF.

ROOF LEAK has been made and sold since 1898 and is increasing in popularity and use at an enormous rate. It is being used on the houses, barns and granaries of the farmers of the land, and on the beautiful homes and cottages of our cities. The roofs of mills, elevators, store buildings, factories, depots, roundhouses, hotels, churches and schoolhouses throughout the length and breadth of the land are being beautified, made whole and durable by ROOF LEAK. Has been adopted by the U. S. Marine Hospital service, prominent railroads and steel works. It gives equally good service on tin, iron, felt or shingles. When you buy it you have the assurance that you are not only saving the price of a new roof, but that you are getting a roof that will last longer, look better and be better than anything else you could get. It has been tried and stood the test.

There is but one ROOF LEAK and is sold in our original kits bearing our signature and trade-mark, *not sold in bulk.* Anyone buying a roof that he wants to get ten years more service from without the expense of a new roof should write at once and get liquid samples and interesting book showing various uses, all of which will be sent absolutely free on request. Write to-day and save the price of a new roof or insure the prolonged life of roofs in good condition.

Elliott Varnish Co. 156 Fulton St., Chicago 263 Pearl St., New York
MANUFACTURERS OF FINE VARNISHES

MASON'S NEW PAT. WHIP HOIST
for Outrigger hoists. Faster than Elevators, and hoists direct from teams. Saves handling at less expense.
Manfd. by VOLNEY W. MASON & CO., Inc. Providence, R. I., U. S. A.

Magical Apparatus.
Grand Book Catalogue Over 700 engravings
25c. Parlor Tricks Catalogue, free.
MARTINKA & CO., Mfrs., 493 Sixth Ave., New York.

OLDSMOBILE

All the time—
On time—Every time
When you're ready the Oldsmobile will go. The name stands for reliability. The Oldsmobile is built to run and does it.
Oldsmobiles embody all the advanced ideas and successful practical principles in automobile construction.
Oldsmobile Standard Runabout Price $650
Oldsmobile Light Tonneau Car
Illustrated below
Price $950
Olds Motor Works
Detroit, U. S. A.

WINTON

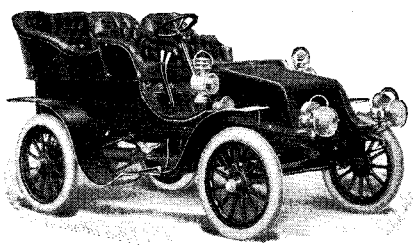

If you do not investigate the **WINTON** before you buy a motor car you will not get its equal. Completely equipped, **$2,500** f. o. b. Cleveland; without top, **$2,300.** Prompt deliveries.

THE WINTON MOTOR CARRIAGE CO., Cleveland, O., U.S.A.

Orient Tonneau Car

Price $525

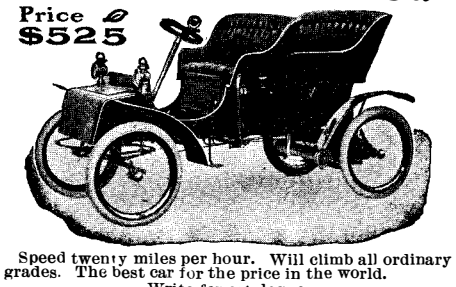

Speed twenty miles per hour. Will climb all ordinary grades. The best car for the price in the world.
Write for catalogue

WALTHAM MANUFACTURING CO.
Waltham, Mass.



CHARTER

GAS and GASOLINE
For All Work.
Stationaries, Portables, Hoisters, Pumpers, Sawing & Boat Outfits.
Send for Catalogue and Testimonials
State Your Power Needs.
CHARTER GAS ENGINE CO., Box 148, STERLING, ILL.

What Is Daus' Tip-Top?

TO PROVE that Daus' "Tip-Top" is the best and simplest device for making **100 copies** from pen-written and **50 copies** from typewritten original, we will ship complete duplicator, cap size, **without deposit,** on **ten (10) days' trial.**
Price $7.50 less trade discount of 33⅓ per cent, or $5 Net

The Felix A. B. Daus Duplicator Co., Daus Bldg., 111 John St., New York

Scales All varieties at lowest prices. Best Railroad Track and Wagon or Stock Scales made. Also 1000 useful articles, including Safes, Sewing Machines, Bicycles, Tools, etc. save Money. Lists Free. CHICAGO SCALE CO., Chicago, Ill.

MICROSCOPES

Our Microscopes, Microtomes, Laboratory Glassware, Chemical Apparatus, Chemicals, Photo Lenses and Shutters, Field Glasses, Projection Apparatus, Photo-Micro Cameras are used by the leading Laboratories and Government Departments Round the World. Catalogs free.

Bausch & Lomb Opt. Co.
ROCHESTER, N. Y.
New York Chicago Boston Frankfurt, G'y



BRISTOL'S RECORDING INSTRUMENTS.
Pressure Gauges, Vacuum Gauges. Voltmeters, Amperemeters, Wattmeters, and Thermometers, make continuous records *Day and Night.* Will pay for themselves. Every instrument fully guaranteed and sent on 30 days' trial. ☞ *Send for Circulars and Specimen Chart.*
The Bristol Company, Waterbury, Conn.
SILVER MEDAL PARIS EXPOSITION.

CRUDE ASBESTOS

DIRECT FROM MINES

PREPARED ASBESTOS FIBRE for Manufacturers use

R. H. MARTIN,
OFFICE, ST. PAUL BUILDING
220 B'way, New York.

Young Men

of proved business qualities with a little capital will find proper encouragement to locate factories along the lines of the **NORFOLK AND WESTERN RAILWAY.** References must be furnished.

PAUL SCHERER
Agricultural and Industrial Agt., N. & W. Ry. Co.
ROANOKE, VA.

PARALLEL CH·BESLY&Co CLAMPS·ALL ANGLES SIDES=U·S·A Chicago
15 to 21 Clinton Street.



WONDER of the AGE

Jackson's Patent High Head Centrifugal Pump. Guaranteed to raise water 1,000 feet or more and maintain an efficiency of from 70% to 84%. First choice of the Engineer for City Water Works, Draining Mines, Hydraulicing, Irrigating and Reclaiming Land. **Beats the world for Durability, Economy and Efficiency.** *Catalogue No. 6.*

BYRON JACKSON MACHINE WORKS, - - SAN FRANCISCO, CAL.

ACCURATE RELIABLE DURABLE

New England

STYLISH & EFFECTIVE IN DESIGN

WATCHES

We know that our watches will do what we expect of them, therefore, it is easy to unquestionably guarantee every watch we make, from the cheapest to the most expensive grade.

THE NEW ENGLAND WATCH CO., 37 & 39 Maiden Lane, New York
7 Snow Hill, London, England



"RIDOFUM"

(Trade Mark)

We mean roaches and waterbugs. It is easy, if you use a "Ridofum Roach Trap." Send for descriptive circular, or, better still, 25 cents for sample trap, postpaid. Liberal terms to agents.

BENNETT PAPER BOX COMPANY
46 Harrison Avenue, Springfield, Mass.

A. W. FABER

Manufactory Established 1761.

LEAD PENCILS, COLORED PENCILS, SLATE PENCILS, WRITING SLATES, INKS, STATIONERS RUBBER GOODS, RULERS, ARTISTS' COLORS.

78 Reade Street, New York, N. Y.
GRAND PRIZE, Highest Award, PARIS, 1900.

Racine Brass & Iron Co.

RACINE, WIS.

Iron, Bronze & Aluminum Castings for Automobiles

Water Jacket Cylinders a Specialty **Correspondence Solicited**

Olds Gas and Gasoline Engines

Perfect mechanical appliances make for absolute safety and economy.
Stationary Engines, 2 to 100 h. p.
Portable Engines, 8 to 18 h. p.

We have a new catalog, fully describing and illustrating our line, which will be sent on request.

OLDS GASOLINE ENGINE WORKS
216 River Street LANSING, MICH.

"The Car that Climbs" Is Climbing in Favor

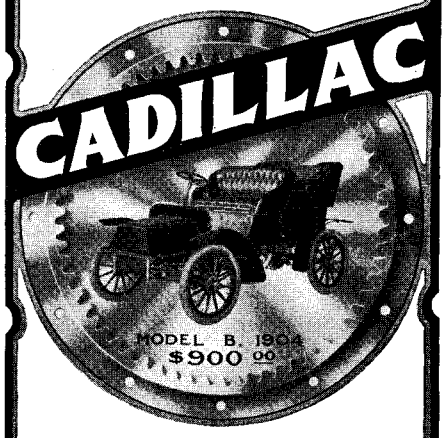

Write for our free illustrated booklet N which fully describes the various Cadillac models, and gives address of nearest agency where demonstrations are given. As to performance in everyday service—ask any Cadillac owner.

CADILLAC AUTOMOBILE CO.
Detroit, Michigan
Member Association Licensed Automobile Manufact'rs.

THE INTERNAL WORK OF THE Wind. By S. P. LANGLEY. A painstaking discussion by the leading authority on Aerodynamics, of a subject of value to all interested in airships. SCIENTIFIC AMERICAN SUPPLEMENTS **946** and **947.** Price 10 cents each, by mail. Munn & Company, 361 Broadway, New York City, and all newsdealers.

THE GRIFFIN MILL

579 Mills have been sold the past two years to the following Portland Cement Works:—

Lehigh Portland Cement Co., Ormrod, Pa.
Lehigh Portland Cement Co., Mitchell, Ind.
Lehigh Portland Cement Co., Wellston, Ohio.
Central Cement Co., Coplay, Pa.
Glens Falls Portland Cement Co., Glens Falls, N. Y.
Cuyaga Lake Cement Co., Ithaca, N. Y.
National Portland Cement Co., Durham, Ont.
Sandusky Portland Cement Co., Syracuse, Ind.
Newaygo Portland Cement Co., Newaygo, Mich.
Great Northern Portland Cement Co., Baldwin, Mich.
Midland Portland Cement Co., Bedford, Ind.
Bonneville Portland Cement Co., Siegfried, Pa.
Iroquois Portland Cement Co., Caledonia, N. Y.
Alpha Portland Cement Co., Alpha, N. J.
Whitehall Portland Cement Co., Cementon, Pa.
Struthers Furnace Co., Struthers, Ohio.
Iola Portland Cement Co., Iola, Kan.
Iola Portland Cement Co., Dallas, Texas.
Wabash Portland Cement Co., Stroh, Ind.
Kansas Portland Cement Co., Iola, Kan.
Alma Cement Co., Wellston, Ohio.
Aetna Portland Cement Co., Fenton, Mich.
Penn-Allen Portland Cement Co., Allentown, Pa.
Martins Creek Portland Cement Co., Martins Creek, N. J.
Wolverine Portland Cement Co., Coldwater, Mich.
Bronson Portland Cement Co., Bronson, Mich.
Quaker Portland Cement Co., Sandts Eddy, Pa.
Diamond Cement & Lithograph Stone Co., Chicago, Ill.
Mississippi Valley Portland Cement Co., Louisiana, Mo.
Belleville Portland Cement Co., Belleville, Ont.
Toledo Portland Cement Co., Manchester, Mich.

That forms an affirmative argument that ought to clinch your orders. Most work and best work in the least time with the least expense make the "Griffin Mill" the King Pin of the world.

Illustrated catalogue shows what you need. It is free.

BRADLEY PULVERIZER CO.
92 STATE STREET, BOSTON, MASS.

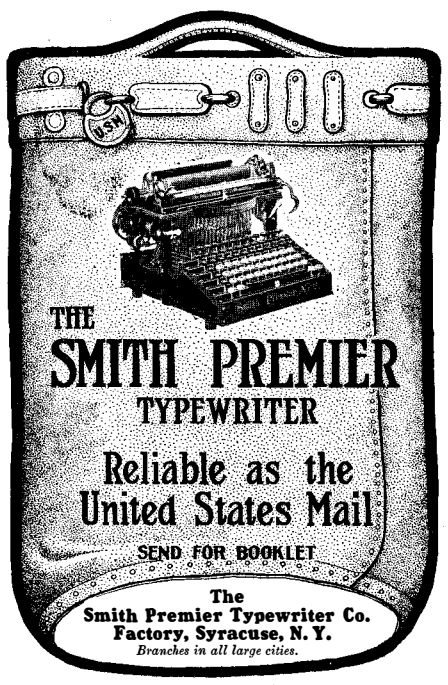

THE **SMITH PREMIER** TYPEWRITER

Reliable as the United States Mail

SEND FOR BOOKLET

The Smith Premier Typewriter Co.
Factory, Syracuse, N. Y.
Branches in all large cities.

HAND BOOK OF

GASOLINE AUTOMOBILES

THIS handsomely bound and artistically printed book now in the hands of the printers will contain 88 pages and will illustrate seventy-eight gasoline cars, one car and its specifications to each page. It is issued primarily for convenience and information to the prospective purchaser of an automobile. The products of the principal manufacturers throughout the United States of America and the importers of gasoline machines are shown by illustrations and specifications.

Sent upon receipt of six cents in stamps for postage

ASSOCIATION OF LICENSED AUTOMOBILE MANUFACTURERS
Room 1020 No. 7 E. 42d St., New York

EASTERN GRANITE ROOFING CO.
Irving Building New York

FAINT HEART never passed the life insurance doctor. The time to get insured is now—when every organ is perfectly healthy. Our little booklet "The How and the Why" will tell you how easily you can be insured by mail.

PENN MUTUAL LIFE INS. CO.

PHILADELPHIA

WIRELESS TELEGRAPHY.—ITS PROgress and Present Condition are well discussed in SCIENTIFIC AMERICAN SUPPLEMENTS **1425, 1426, 1427, 1386, 1388, 1389, 1383, 1381, 1327, 1328, 1329, 1431.** Price 10 cents each, by mail. Munn & Co., 361 Broadway, New York City, and all newsdealers.



At Last the Game of Golf

enjoys the peculiar privilege of being perfection. **THE "MISSING LINK"—OF THE LINKS** found in the **"Ideal" Scoring Device.** Always keeps the score in sight. Weightless. Accurate. Adjustable to any wrist. A transparent cover protects the sheet from soil. Openings permit scoring with convenience and despatch. Lift the button and a fresh sheet is instantly exposed. Made from fine tan Russia. Device mailed for **Fifty Cents.**



W. H. WEISSBROD, - Greenfield, Mass.

JESSOP STEEL CO MFRS OF CRUCIBLE SHEET STEEL WASHINGTON, PA.

BE LAZY

—and take it easy, as you can do by wearing the **"Lightweight" PRESIDENT SUSPENDER**—two ounces.
Any store 50c and $1.00 or postpaid for choicest patterns.
THE C. A. EDGARTON MFG. CO., Box 310, Shirley, Mass.